


KL V-L32M1

SERVICE MANUAL

AEP Model

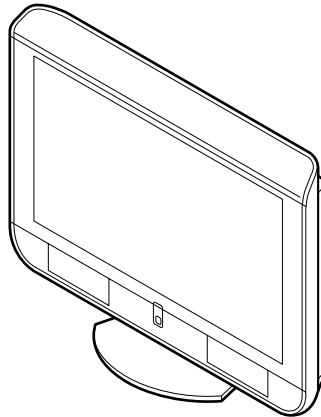

SPECIFICATIONS

Display Unit:

Power Requirement:
220–240 V AC, 50 Hz
Screen Size: 32 inches
Approx. 66.0 cm measured diagonally
Display Resolution:
1,366 dots (horizontal) × 768 lines (vertical)
Power Consumption:
145 W
Standby Power Consumption:
0.6 W or less
Dimensions (w × h × d):
Approx. 835 × 670.5 × 287.5 mm (with stand)
Approx. 835 603.5 110 mm (without stand)
Weight:
Approx. 19.7 kg (with stand)
Approx. 17.4 kg (without stand)

Panel System:

LCD (Liquid Crystal Display) Panel

TV System:

Depending on your country/region selection:
B/G/H, D/K, L, I

Colour System:

PAL, SECAM
NTSC 3.58, 4.43 (only Video In)












Aerial:

75 ohm external terminal for VHF/UHF

Channel Coverage:

VHF: E2–E12
UHF: E21–E69
CATV: S1–S20
HYPER: S21–S41
D/K: R1–R12, R21–R69
L: F2–F10, B–Q, F21–F69
I: UHF B21–B69

Terminals:


-  1
21-pin Scart connector (CENELEC standard) including audio/video input, RGB input, and TV audio/video output.
-  2
21-pin Scart connector (CENELEC standard) including audio/video input, RGB input, and audio/video output.
-  3 (SMARTLINK)
21-pin Scart connector (CENELEC standard) including audio/video input, S video input, selectable audio/video output, and SmartLink interface.
-  4
Y: 1 Vp-p, 75 ohms, 0.3V negative sync
PB: 0.7 Vp-p, 75 ohms
PR: 0.7 Vp-p, 75 ohms
-  4
Audio input (phono jacks)
500 mVrms
Impedance: 47 kilo ohms
-  5
S video input (4-pin mini DIN)
-  5
Video input (phono jack)
-  5
Audio input (phono jacks)
-  Audio output (Left/Right) (phono jacks)
-  Headphones jack
-  CENTRE SPEAKER IN:
Max. 180 W (6-ohms)

Sound Output:

10.0 W + 10.0 W

LCD Colour TV
SONY®

Accessories Supplied:

- Remote control
RM-Y1102 (1)
- Size AA batteries (R6 type) (2)
- Coaxial cable (1)
- Mains lead (Type C-6) (1)
- Mains lead (Type BF) (1)
 Mains lead Type BF may not be supplied depending on the country.
- Clamp screws (2)

Optional Accessory:

- Wall-Mount Bracket SU-LW1

Other Features:

- Teletext, Fastext
- Sleep Timer
- SmartLink (Direct link between your TV and a compatible VCR or DVD recorder. For more information on SmartLink, please refer to the instruction manual of your VCR or DVD recorder.)
- TV system autodetection
- Auto Format
- Screen Memo
- NextView (depending on availability of service)

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:


1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are “pinched” or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the antenna terminals, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC Leakage. Check leakage as described right.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOMs that are suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

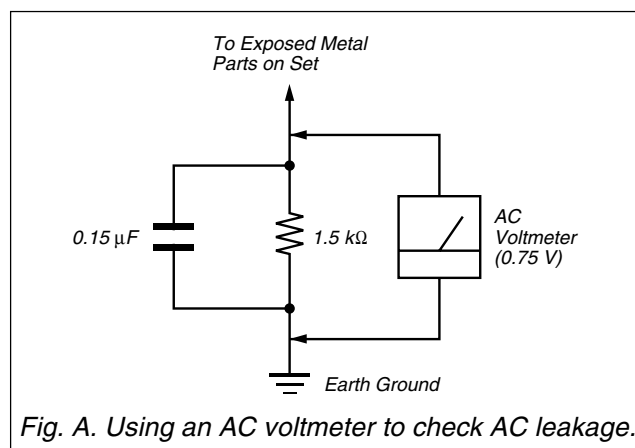

WARNING!!

SAFETY-RELATED COMPONENT WARNING!!
COMPONENTS IDENTIFIED BY SHADING AND MARK ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL FOR SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

AVERTISSEMENT!!


ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!
LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET UNE MARQUE ! SONT CRITIQUES POUR LA SÉCURITÉ. NE LES REMPLACER QUE PAR UNE PIÈCE PORTANT LE NUMÉRO SPECIFIÉ. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIÉS DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.

TABLE OF CONTENTS


1. DISASSEMBLY	1-1
1-1. STAND REMOVAL	1-1
1-2. REAR CABINET ASSY REMOVAL	1-1
1-3. BL BOARD REMOVAL	1-2
1-4. GL BOARD REMOVAL	1-2
1-5. ULE BOARD REMOVAL	1-3
1-6. AE BOARD REMOVAL	1-3
1-7. LCD PANEL REMOVAL	1-4
1-8. H1 AND H3 BOARDS REMOVAL	1-5
1-9. H2 BOARD REMOVAL	1-5
2. ADJUSTMENT	2-1
2-1. AGING	2-1
2-1-1. Aging setting	2-1
2-1-2. Aging condition	2-1
2-2. ADJUSTMENT OF SIGNAL LEVEL	2-1
2-2-1. Check AD (2163 case) calibration	
registration items	2-1
2-2-2. Y signal AD calibration of 2163 decode	2-1
2-2-3. C signal AD calibration of 2163 decode	2-1
2-2-4. Check AD (CCP2 case) calibration	
registration items	2-1
2-2-5. Y signal AD calibration of CCP2 decode	2-2
2-2-6. C signal AD calibration of CCP2 decode	2-2
2-2-7. Check AD (Component case) calibration	
registration items	2-2
2-2-8. Y signal AD calibration of component input ..	2-2
2-2-9. C signal AD calibration of componet input	2-2
2-3. WHITE BALANCE ADJUSTMENT	2-3
2-3-1. White balance of Color temperature "Cool"	2-3
2-3-2. White balance of Color temperature "Normal" ..	2-3
2-3-3. White balance of Color temperature "Warm" ..	2-3
3. DIAGRAMS	3-1
3-1. BLOCK DIAGRAMS	3-1
3-2. FRAME DIAGRAMS	3-5
3-3. CIRCUIT BOARDS LOCATION	3-6
3-4. SCHEMATIC DIAGRAMS AND	
PRINTED WIRING BOARDS	3-6
(1) Schematic Diagrams of AE Board	3-1
(2) Schematic Diagrams of BL Board	3-6
(3) Schematic Diagrams of GL Board	3-11
(4) Schematic Diagram of H1 and H2 Boards	3-12
(5) Schematic Diagrams of H3 Board	3-13
(6) Schematic Diagrams of ULE Board	3-14
3-5. SEMICONDUCTORS	3-27
4. EXPLODED VIEWS	4-1
4-1. CABINET ASSY AND STAND	4-2
4-2. CHASSIS-1	4-3
4-3. CHASSIS-2	4-4
4-4. BEZEL ASSY	4-5
4-5. PACKING MATERIALS	4-6
5. ELECTRICAL PARTS LIST	5-1

SECTION 1 DISASSEMBLY


1-1. STAND REMOVAL

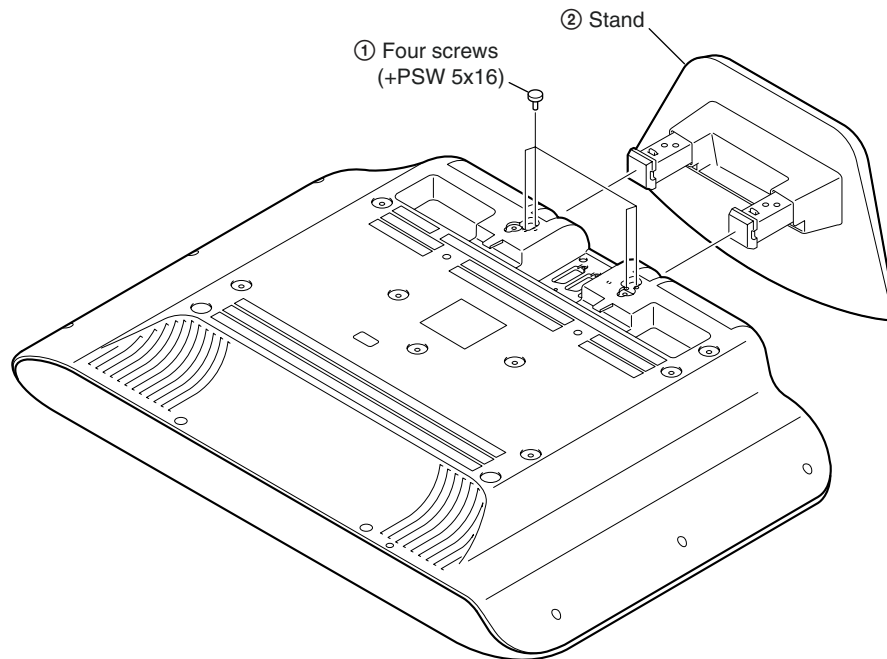


1-2. REAR CABINET ASSY REMOVAL

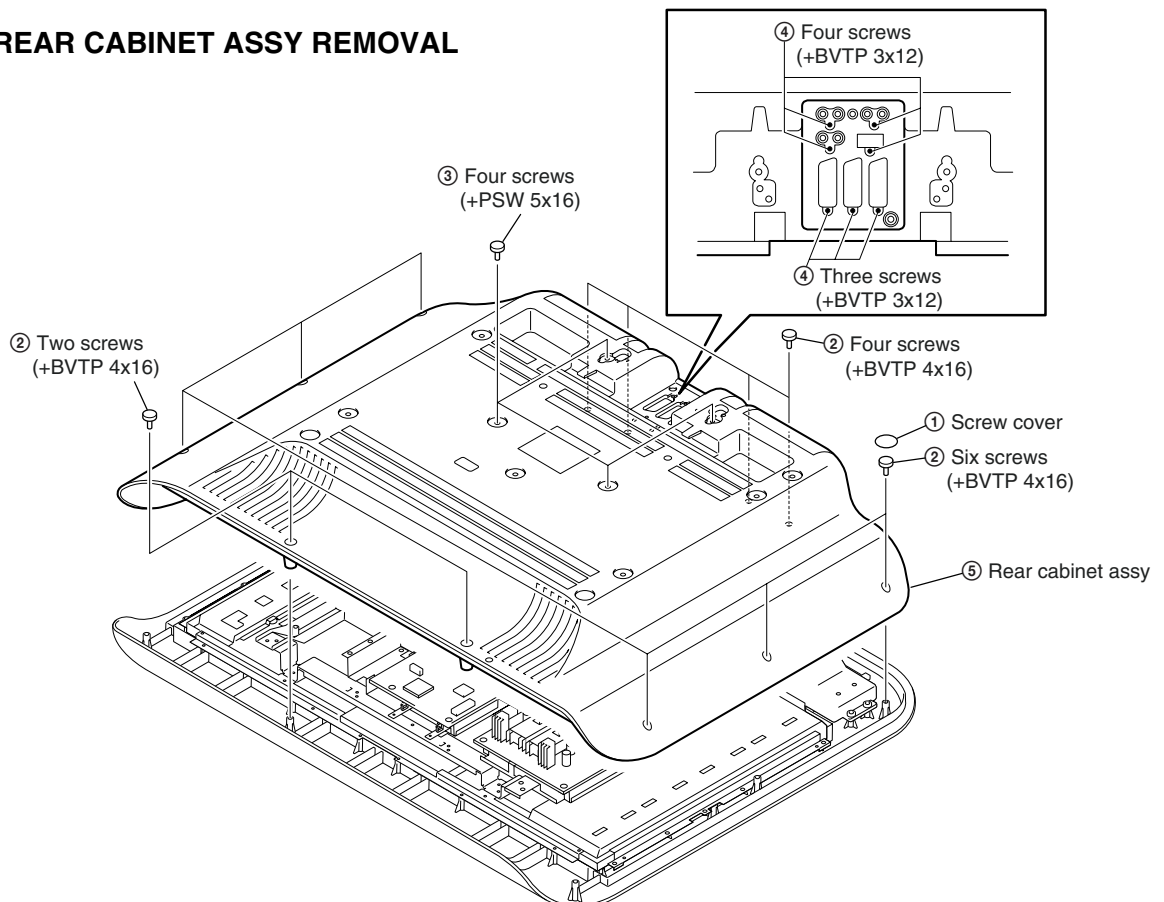


1-3. BL BOARD REMOVAL

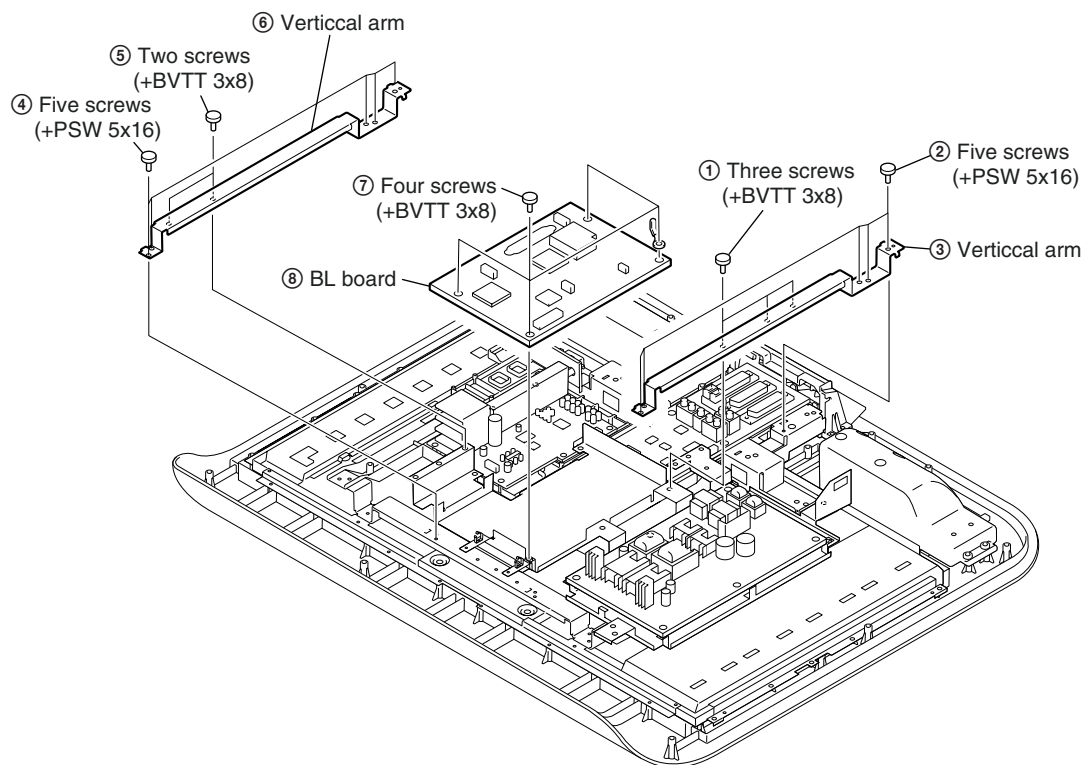


1-4. GL BOARD REMOVAL

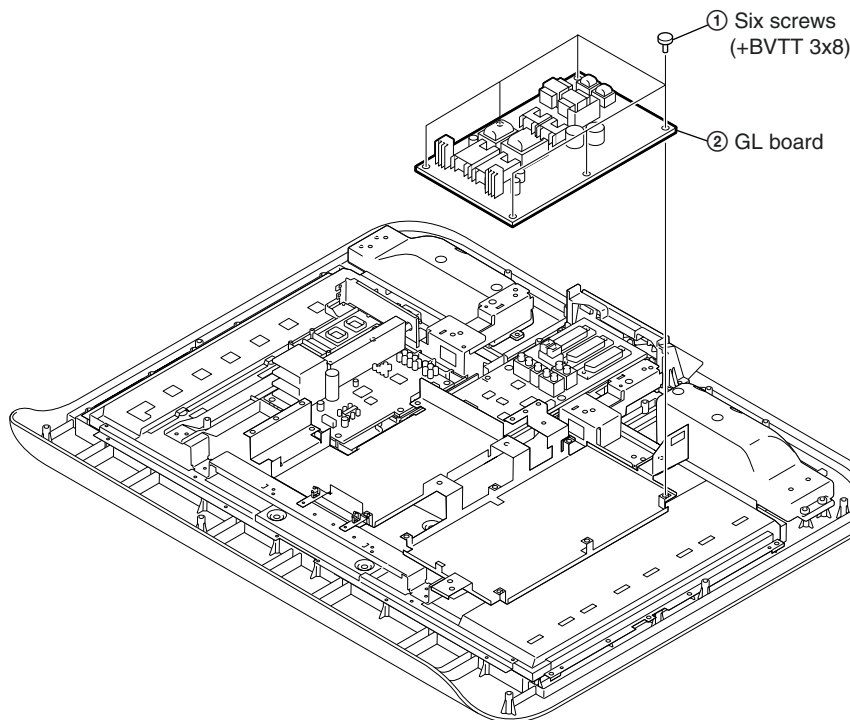


1-5. ULE BOARD REMOVAL

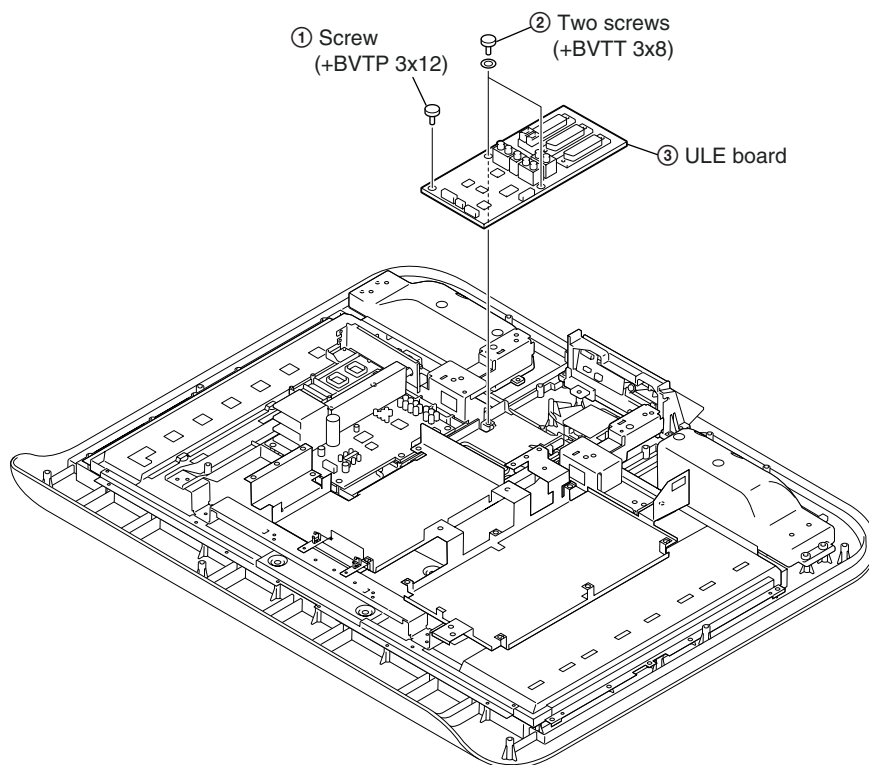


1-6. AE BOARD REMOVAL

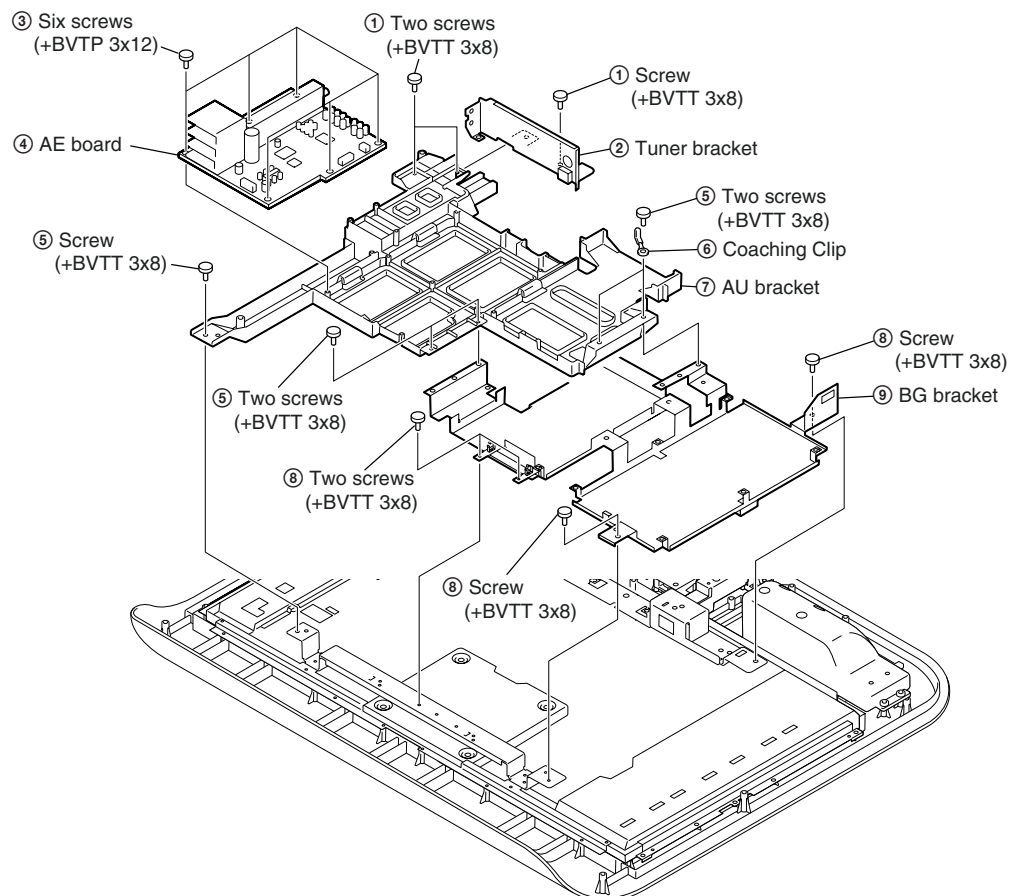


1-7. LCD PANEL REMOVAL

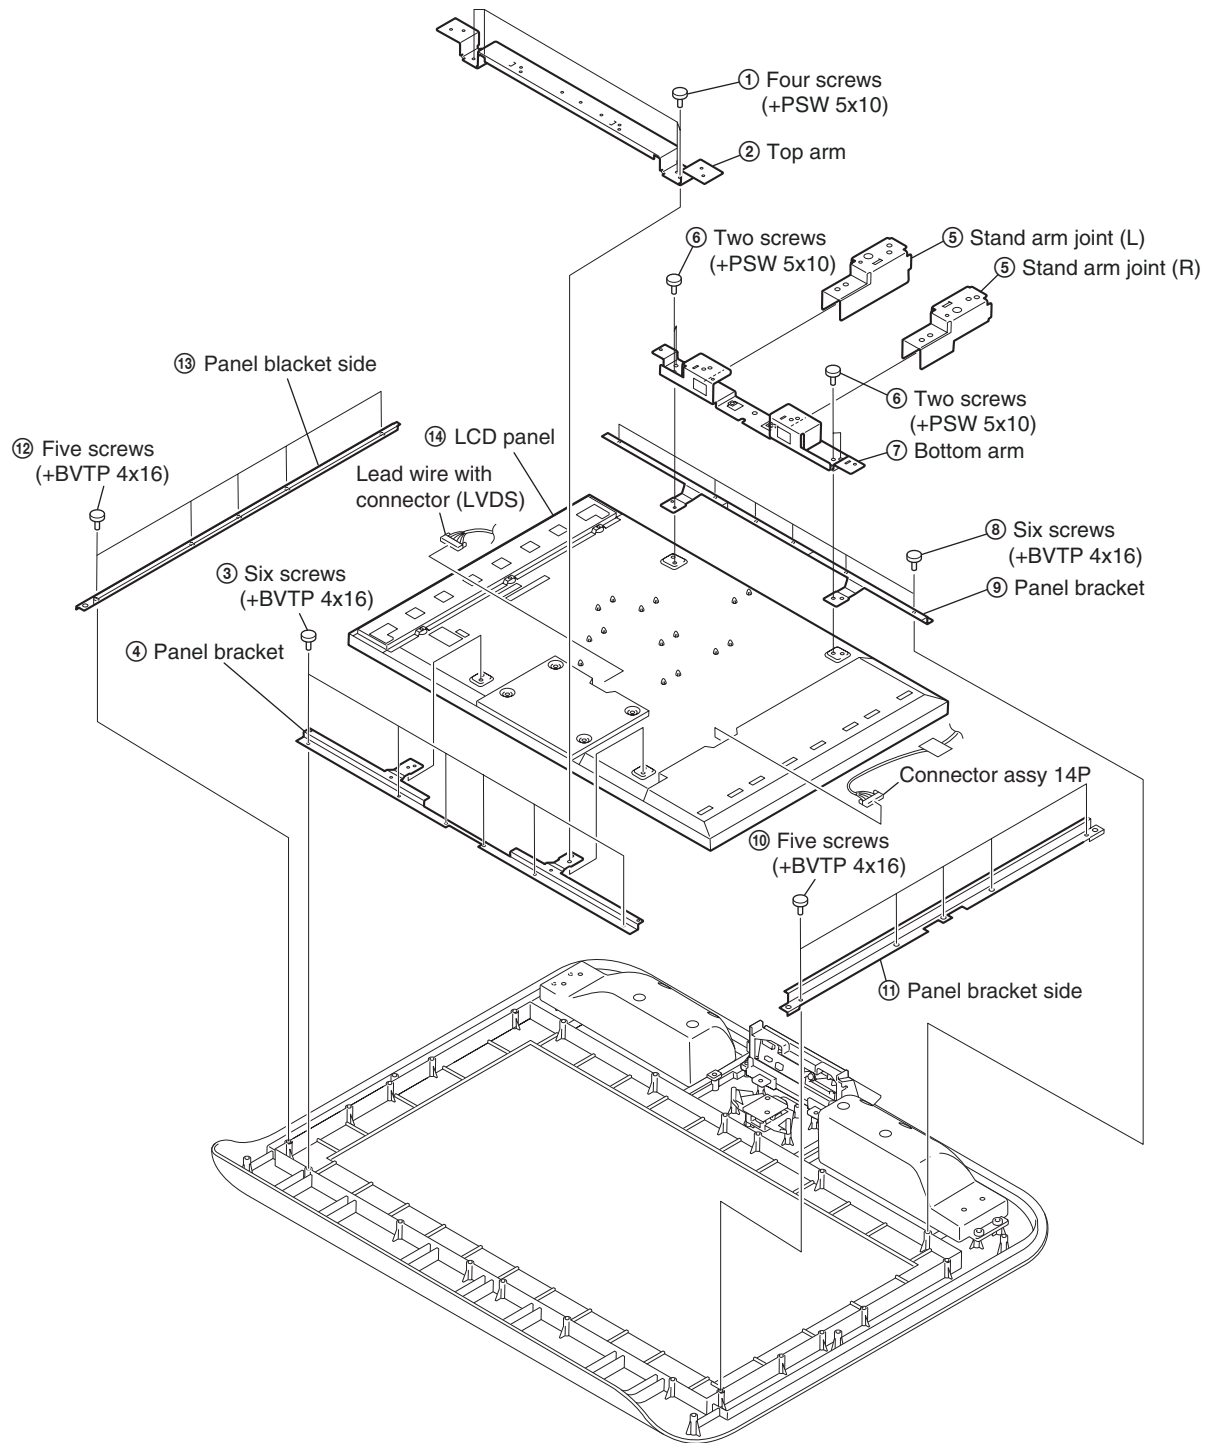

1-8. H1 AND H3 BOARDS REMOVAL

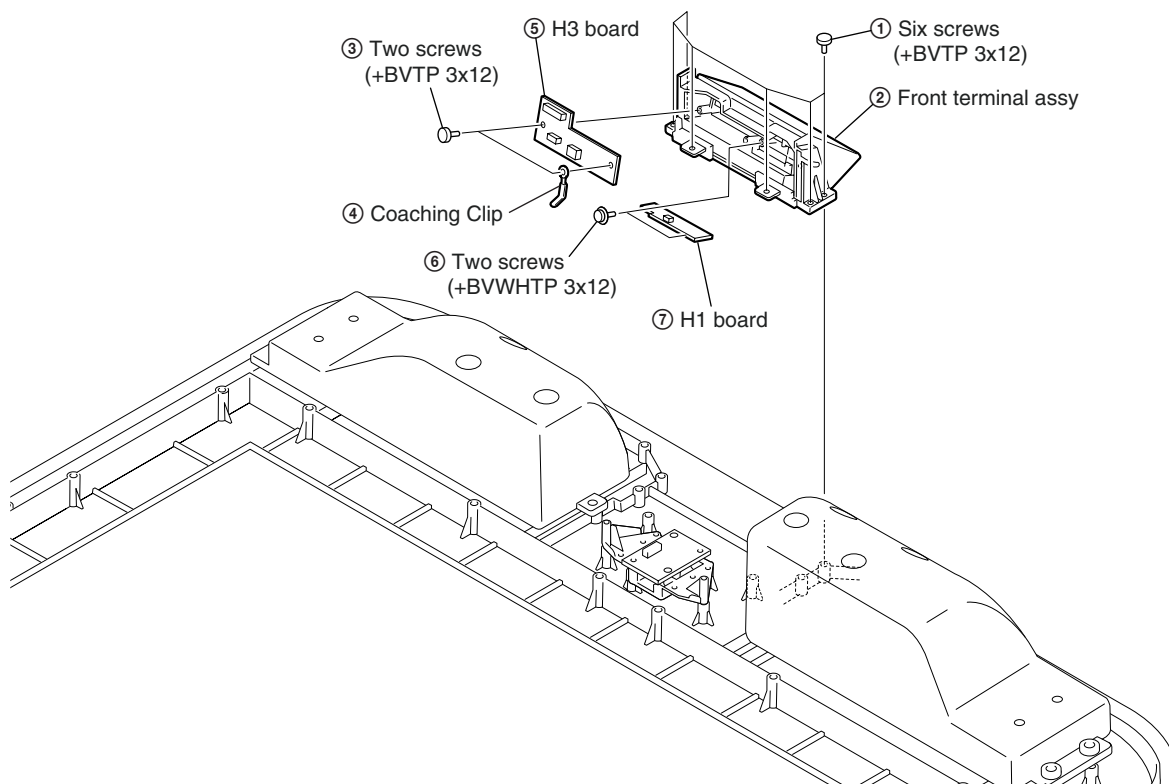

1-9. H2 BOARD REMOVAL

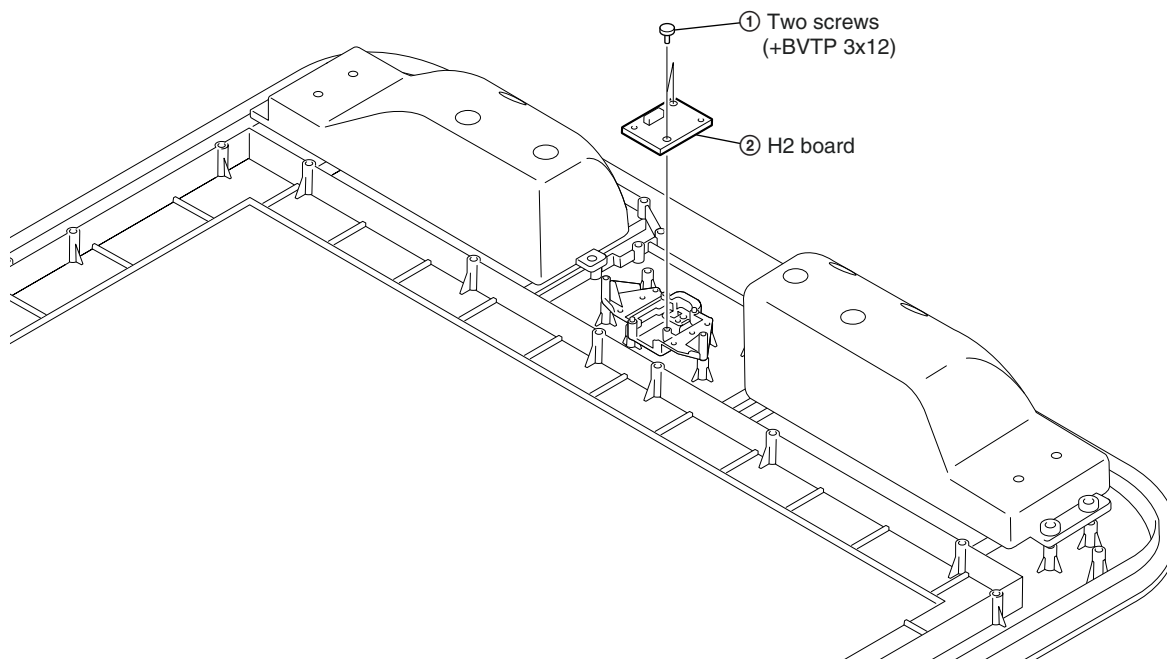

SECTION 2 ADJUSTMENTS

2-1. AGING

2-1-1. Aging setting

- To set aging mode on no input signal, change the register.
And do the "service save".

[Aging setting]

"MON_CON_REG_2" = 185

"AGING_COLOR" = 1

2-1-2. Aging condition

Power supply : 220-240 V (50Hz)

Time : More than 10 minutes

Temperature : 22°C ~ 28°C

Luminance : On aging mode setting

Note:

After aging, if power was shut down until W/B adjustment, shall be adjusted W/B after aging more than 30 second.

2-2. ADJUSTMENT OF SIGNAL LEVEL

This adjustment shall be used ECS.

2-2-1. Check AD (2163 case) calibration registration items

- Select AV1 and input PAL signal.
- Set following items.

Item	Data
PICTURE_MODE	0 (Live)
COLOR	25
DYNAMIC PICT	OFF
DC TRAN	0

- Check that following items is default.

TARGET_PW_IN_Y
ADJ_Y_DEADBAND
ADJ_Y_LOOPATTEN
TARGET_PW_IN_C
ADJ_C_DEADBAND
ADJ_C_LOOPATTEN
AD_ADJ_TIME_OUT

2-2-2. Y signal AD calibration of 2163 decode

- Check "MON_CON_REG_1" = 3.
(TIMING_AUTO_DETECT is Enable)
- Input 0 IRE black full field with burst in AV1.
- Send "READ_PW_INPUT_Y" command from ECS.
- Check that the detection value of "PW_INPUT_Y" is within the standard of following column.

Item	Standard
PW_INPUT_Y	Less than 128

- Input 100 IRE white full field with burst.
- Send "ADJUST_Y_LEVEL_VIDEO" command from ECS.
The Y_LEVEL_CCP2_04 registration of the video range is adjusted automatic by this command.
Adjustment value also is copied in the proper NVM area.

- Check that the detection value of "PW_INPUT_Y" is within the standard of following column.

Item	Standard
PW_INPUT_Y	4048 + 24, -48

2-2-3. C signal AD calibration of 2163 decode

- Check "MON_CON_REG_1" = 3.
(TIMING_AUTO_DETECT is Enable)
- Input 0 IRE black full field with burst.
- Send "READ_PW_INPUT_CB" command from ECS.
- Check that the detection value of "PW_INPUT_CB" is within the standard of following column.

Item	Standard
PW_INPUT_CB	Less than 128

- Input blue full field with burst.
- Send "ADJUST_C_LEVEL_VIDEO" command from ECS.
The C_LEVEL_CCP2_05 registration of the video range is adjusted automatic by this command.
Adjustment value also is copied in the proper NVM area.
- Check that the detection value of "PW_INPUT_CB" is within standard of following column.

Item	Standard
PW_INPUT_CB	3376 ± 54

- Input red full field with burst.
- Send "READ_PW_INPUT_CR" command from ECS.
- Check that the detection value of "PW_INPUT_CR" is within standard of following column.

Item	Standard
PW_INPUT_CR	Adjustment value of PW_INPUT_CB ± 128

2-2-4. Check AD (CCP2 case) calibration registration items

- Select AV3 and input PAL signal
- Set following items.

Item	Data
PICTURE_MODE	0 (Live)
COLOR	25
DYNAMIC PICT	OFF
DC TRAN	0

- Check that following items is default.

TARGET_PW_IN_Y
ADJ_Y_DEADBAND
ADJ_Y_LOOPATTEN
TARGET_PW_IN_C
ADJ_C_DEADBAND
ADJ_C_LOOPATTEN
AD_ADJ_TIME_OUT

2-2-5. Y signal AD calibration of CCP2 decode

1. Check "MON_CON_REG_1" = 3.
(TIMING_AUTO_DETECT is Enable)
2. Input 0 IRE black full field with burst.
3. Send "READ_PW_INPUT_Y" command from ECS.
4. Check that the detection value of "PW_INPUT_Y" is within the standard of following column.

Item	Standard
PW_INPUT_Y	Less than 128

5. Input 100 IRE white full field with burst.
6. Send "ADJUST_Y_LEVEL_VIDEO" command from ECS.
The Y_LEVEL_CCP2_04 registration of the video range is adjusted automatic by this command.
Adjustment value also is copied in the proper NVM area.
7. Check that the detection value of "PW_INPUT_Y" is within the standard of following column.

Item	Standard
PW_INPUT_Y	4048 + 24, -48

2-2-6. C signal AD calibration of CCP2 decode

1. Check "MON_CON_REG_1" = 3.
(TIMING_AUTO_DETECT is Enable)
2. Input 0 IRE black full field with burst.
3. Send "READ_PW_INPUT_CB" command from ECS.
4. Check that the detection value of "PW_INPUT_CB" is within the standard of following column.

Item	Standard
PW_INPUT_CB	Less than 128

5. Input blue full field with burst.
6. Send "ADJUST_C_LEVEL_VIDEO" command from ECS.
The C_LEVEL_CCP2_05 registration of the video range is adjusted automatic by this command.
Adjustment value also is copied in the proper NVM area.
7. Check that the detection value of "PW_INPUT_CB" is within standard of following column.

Item	Standard
PW_INPUT_CB	3376 ± 54

8. Input red full field with burst.
9. Send "READ_PW_INPUT_CR" command from ECS.
10. Check that the detection value of "PW_INPUT_CR" is within standard of following column.

Item	Standard
PW_INPUT_CR	Adjustment value of PW_INPUT_CB ± 128

2-2-7. Check AD (Component case) calibration registration items

1. Select AV4 and input 575i signal.
2. Set following items.

Item	data
PICTURE_MODE	0 (Live)
COLOR	25
DYNAMIC PICT	OFF
DC TRAN	0

3. Check that following items is default.

TARGET_PW_IN_Y ADJ_Y_DEADBAND ADJ_Y_LOOPATTEN TARGET_PW_IN_C ADJ_C_DEADBAND ADJ_C_LOOPATTEN AD_ADJ_TIME_OUT

2-2-8. Y signal AD calibration of component input

1. Check "MON_CON_REG_1" = 3.
(TIMING_AUTO_DETECT is Enable)
2. Input 0 IRE black full field with burst in AV3.
3. Send "READ_PW_INPUT_Y" command from ECS.
4. Check that the detection value of "PW_INPUT_Y" is within the standard of following column.

Item	Standard
PW_INPUT_Y	Less than 128

5. Input 100 IRE white full field with burst.
6. Send "ADJUST_Y_LEVEL_VIDEO" command from ECS.
The Y_LEVEL_CCP2_04 registration of the video range is adjusted automatic by this command.
Adjustment value also is copied in the proper NVM area.
7. Check that the detection value of "PW_INPUT_Y" is within the standard of following column.

Item	Standard
PW_INPUT_Y	4048 + 24, -48

2-2-9. C signal AD calibration of componet input

1. Check "MON_CON_REG_1" = 3.
(TIMING_AUTO_DETECT is Enable)
2. Input 0 IRE black full field with burst.
3. Send "READ_PW_INPUT_CB" command from ECS.
4. Check that the detection value of "PW_INPUT_CB" is within the standard of following column.

Item	Standard
PW_INPUT_CB	Less than 128

5. Input blue full field with burst.
6. Send "ADJUST_C_LEVEL_VIDEO" command from ECS.
The C_LEVEL_CCP2_05 registration of the video range is adjusted automatic by this command.
Adjustment value also is copied in the proper NVM area.
7. Check that the detection value of "PW_INPUT_CB" is within standard of following column.

Item	Standard
PW_INPUT_CB	4048 + 24, -48

8. Input red full field with burst.
9. Send "READ_PW_INPUT_CR" command from ECS.
10. Check that the detection value of "PW_INPUT_CR" is within standard of following column.

Item	Standard
PW_INPUT_CR	Adjustment value of PW_INPUT_CB ± 128

2-3. WHITE BALANCE ADJUSTMENT

This adjustment shall be used ECS.

2-3-1. White balance of Color temperature “Cool”

1. Select Video input (AV3 or AV5).
2. Set following items.

Item	Data
PICTURE_MODE	2 (Personal)
COLOR	25
COLOR_TONE	0 (Cool)
CONTRAST	Max
BACKLIGHT	Max

Note:

DON'T DO ANY SAVE.

3. Input 70 IRE gray full field signal in Video input.
4. Adjust R_DRIVE, B_DRIVE until High light adjustment value.

<High light adjustment value (for Cool)>

	KL V-L32M1	Range
x	0.2727	12000K -5MPCD
y	0.2749	
Y	—	N/A

5. Input 20 IRE gray full field signal in Video input.
6. Adjust R_BKG, B_BKG until Low light adjustment value.
After adjustment, the biggest value register of BKG 3 registers (R_BKG, G_BKG, B_BKG) should be “128”.

<Low light adjustment value (for Cool)>

	KL V-L32M1	Range
x	0.2727	12000K -5MPCD
y	0.2749	
Y	—	N/A

7. Repeat step 3~6 until it is High and Low light adjustment value.
8. Do “Color Save”.

2-3-2. White balance of Color temperature “Normal”

1. Set following items.

Item	Data
PICTURE_MODE	2 (Personal)
COLOR	25
COLOR_TONE	1 (Normal)
CONTRAST	Max
BACKLIGHT	Max

Note:

DON'T DO ANY SAVE.

2. Input 70 IRE gray full field signal in Video input.
3. Adjust R_DRIVE, B_DRIVE until High light adjustment value.

<High light adjustment value (for Normal)>

	KL V-L32M1	Range
x	0.2788	10500K -5MPCD
y	0.2824	
Y	—	N/A

4. Input 20 IRE gray full field signal in Video input.
5. Adjust R_BKG, B_BKG until Low light adjustment value.
After adjustment, the biggest value register of BKG 3 registers (R_BKG, G_BKG, B_BKG) should be “128”.

<Low light adjustment value (for Normal)>

	KL V-L32M1	Range
x	0.2788	10500K -5MPCD
y	0.2824	
Y	—	N/A

6. Repeat step 2~5 until it is in High and Low light adjustment value.
7. Do “Color Save”.

2-3-3. White balance of Color temperature “Warm”

1. Set following items.

Item	Data
PICTURE_MODE	2 (Personal)
COLOR	25
COLOR_TONE	2 (Warm)
CONTRAST	Max
BACKLIGHT	Max

Note:

DON'T DO ANY SAVE.

2. Input 70 IRE gray full field signal in Video input.
3. Adjust R_DRIVE, B_DRIVE until High light adjustment value.

<High light adjustment value (for Warm)>

	KL V-L32M1	Range
x	0.2875	9000K -5MPCD
y	0.2925	
Y	—	N/A


4. Input 20 IRE gray full field signal in Video input.
5. Adjust R_BKG, B_BKG until Low light adjustment value.
After adjustment, the biggest value register of BKG 3 registers (R_BKG, G_BKG, B_BKG) should be “128”.


<Low light adjustment value (for Cool)>

	KL V-L32M1	Range
x	0.2875	9000K -5MPCD
y	0.2925	
Y	—	N/A

6. Repeat step 2~5 until it is in High and Low light adjustment value.
7. Do “Color Save”.


3-1. BLOCK DIAGRAMS

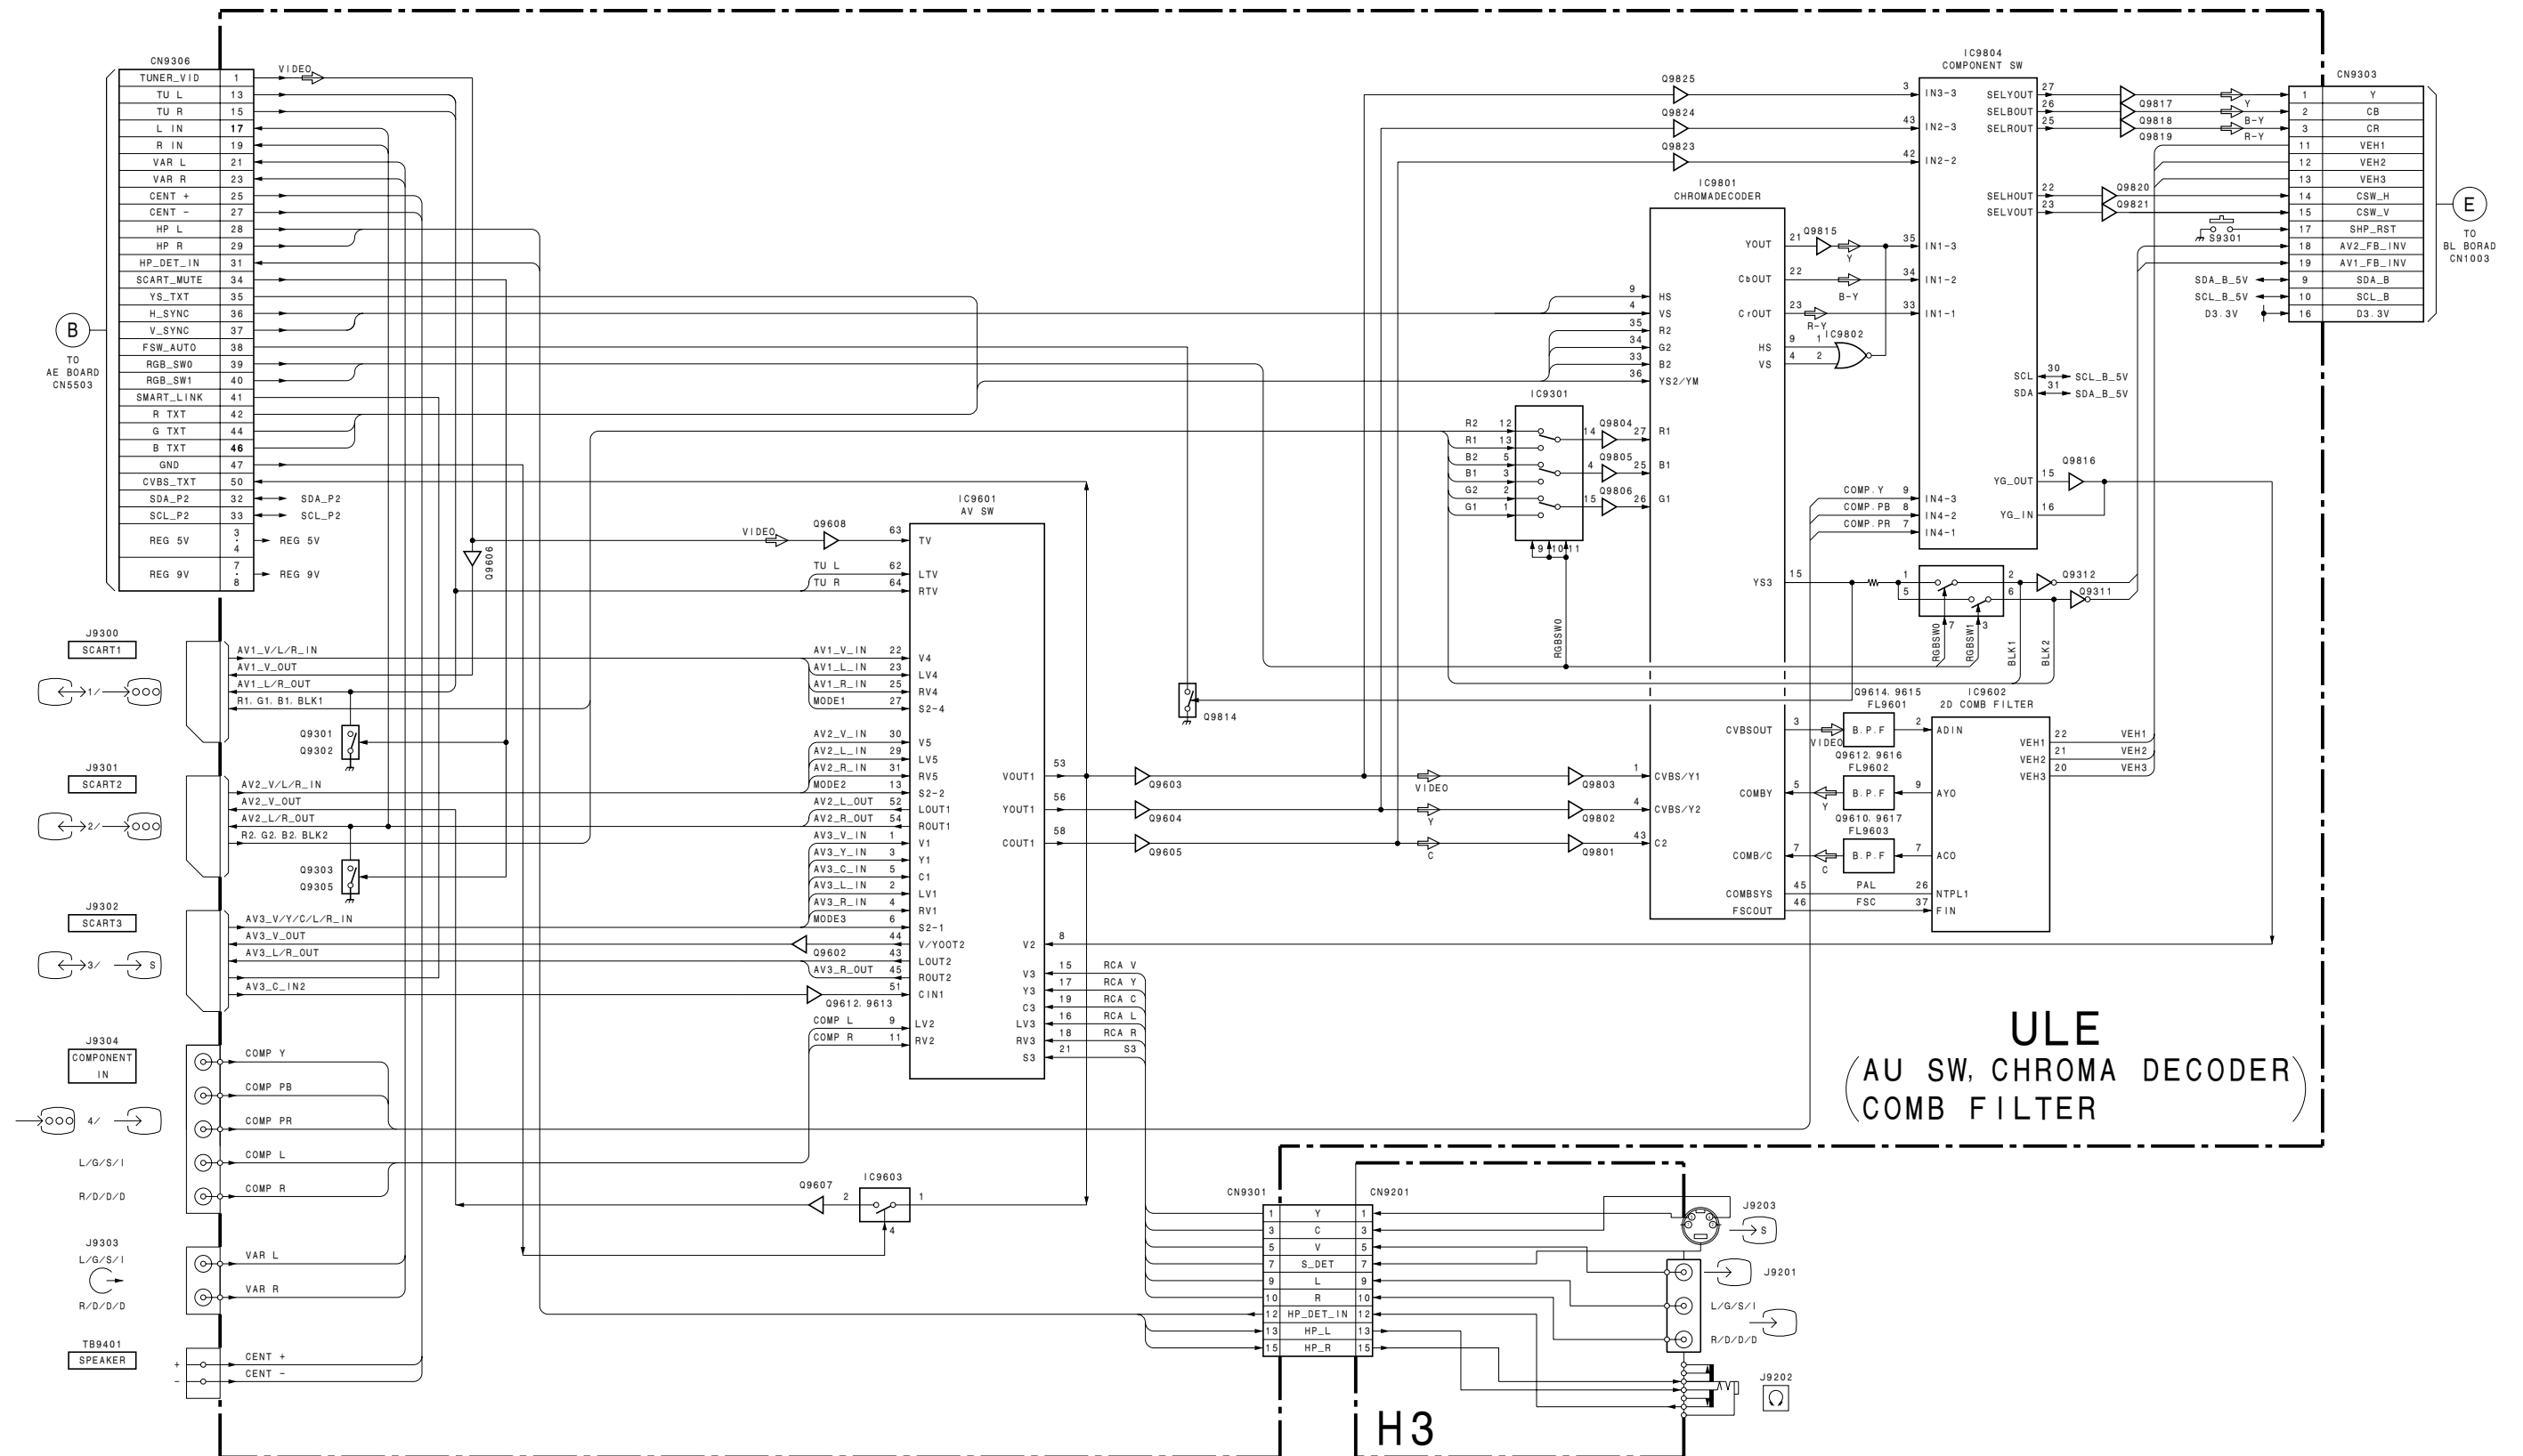






3-2. FRAME DIAGRAMS

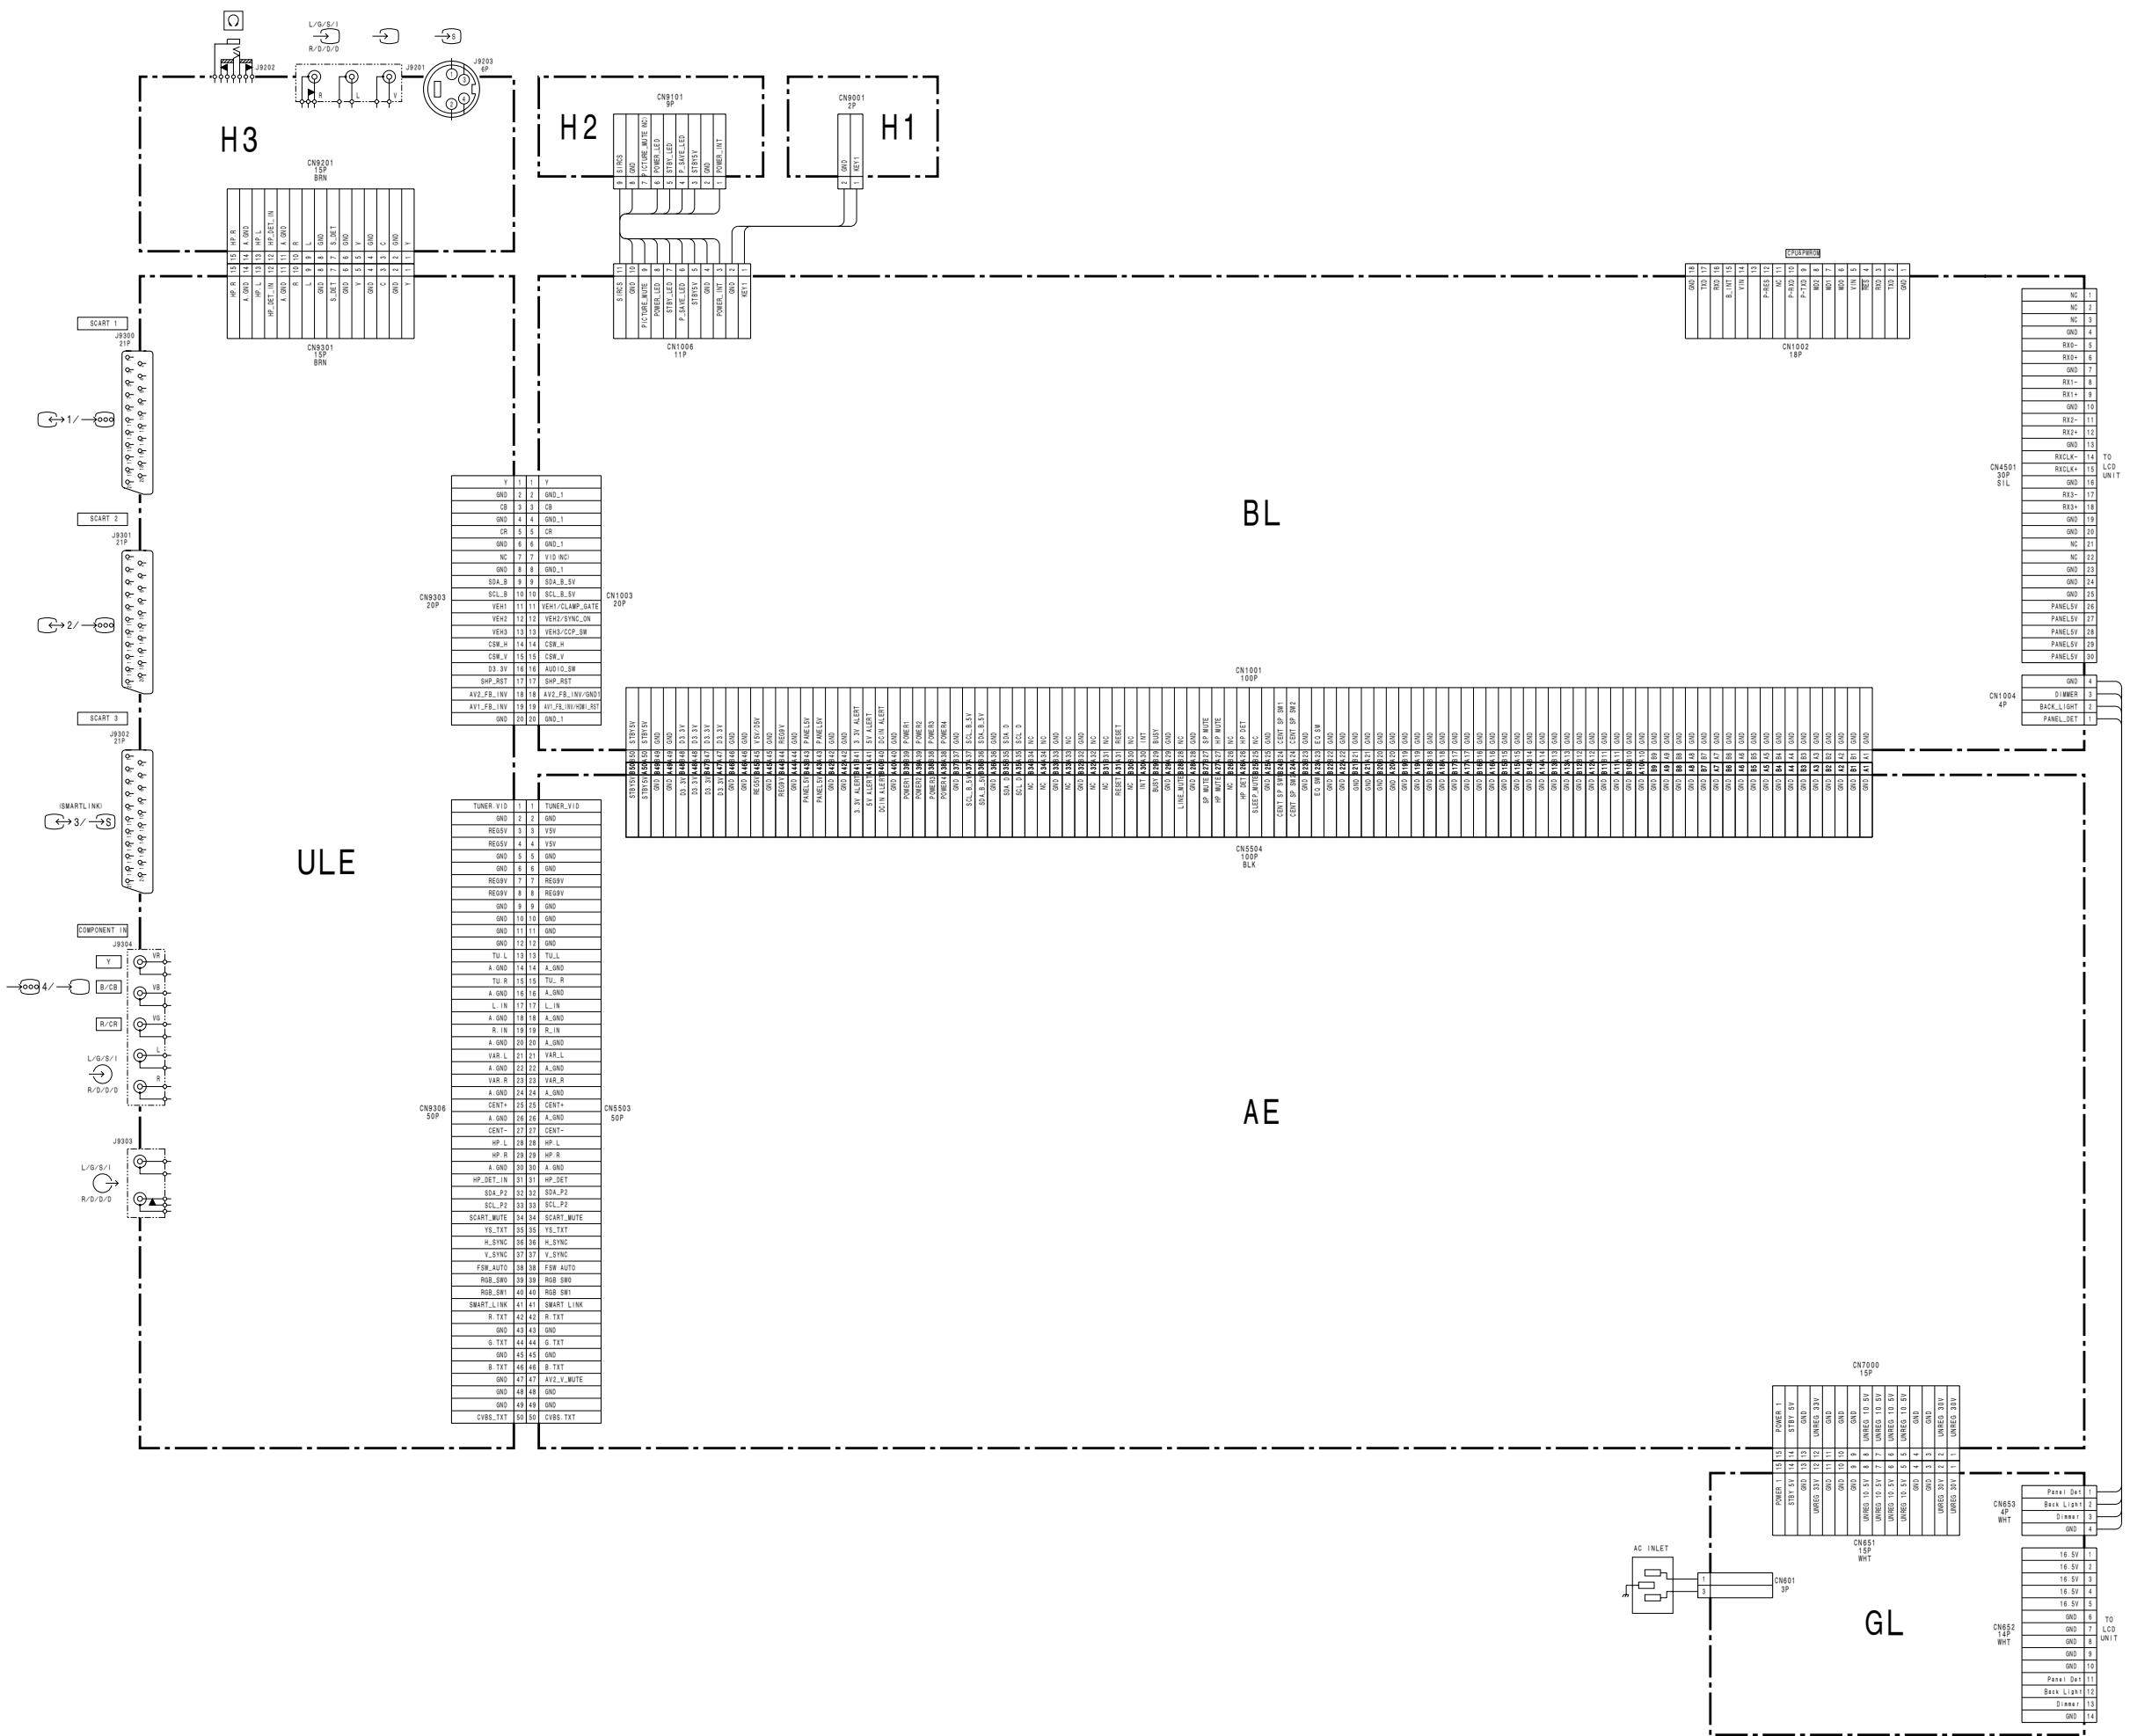

3-3. CIRCUIT BOARDS LOCATION

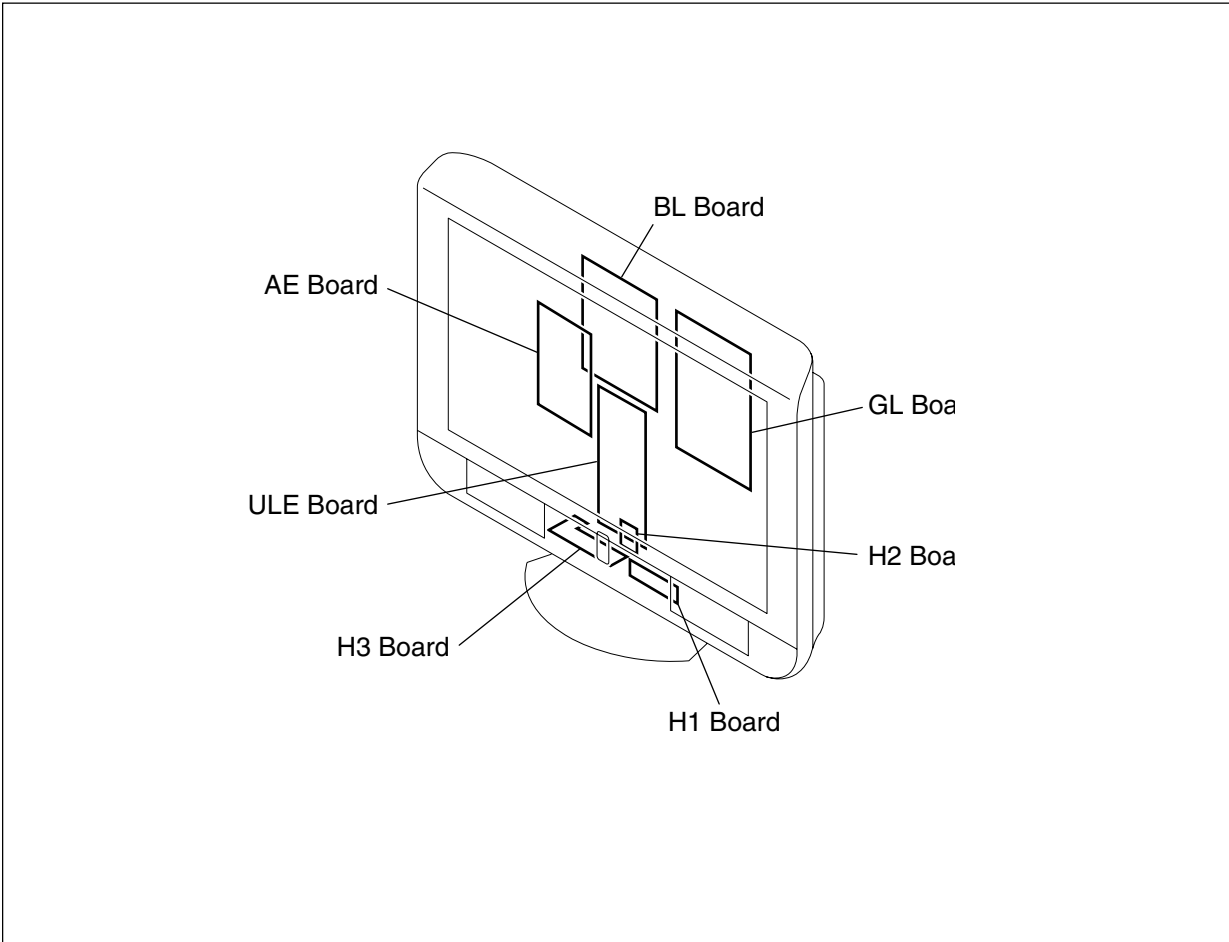

3-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

- Note:**
- All capacitors are in μF unless otherwise noted. (pF : $\mu\mu\text{F}$)
Capacitors without voltage indication are all 50 V.
 - Indication of resistance, which does not have one for rating electrical power, is as follows.
Pitch: 5 mm
Rating electrical power 1/4 W (CHIP : 1/10 W)
 - All resistors are in ohms.
 - : nonflammable resistor.
 - : fusible resistor.
 - : internal component.
 - : panel designation, and adjustment for repair.
 - All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
 - : earth-ground.
 - : earth-chassis.
 - When replacing the part in below table, be sure to perform the related adjustment.
 - All voltages are in V.
 - Readings are taken with a 10 M Ω digital multimeter.
 - Readings are taken with a color-bar signal input.
 - Voltage variations may be noted due to normal production tolerances.
 - * : Can not be measured.
 - : Circled numbers are waveform references.
 - : B + bus.
 - : B – bus.
 - : Signal path.

Note: The components identified by shading and mark \triangle are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un tramé et une marque \triangle sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.


Terminal name of semiconductors in silk screen printed circuit (※)

	Device	Printed symbol	Terminal name	Circuit
①	Transistor		Collector Base Emitter	
②	Transistor		Collector Base Emitter	
③	Diode		Cathode Anode	
④	Diode		Cathode Anode (NC)	
⑤	Diode		Cathode Anode (NC)	
⑥	Diode		Common Anode Cathode	
⑦	Diode		Common Anode Cathode	
⑧	Diode		Common Anode Anode	
⑨	Diode		Common Anode Anode	
⑩	Diode		Common Cathode Cathode	
⑪	Diode		Common Cathode Cathode	
⑫	Diode		Anode Cathode Anode Cathode	
⑬	Transistor (FET)		Drain Source Gate	
⑭	Transistor (FET)		Drain Source Gate	
⑮	Transistor (FET)		Source Drain Gate	
⑯	Transistor		Emitter Collector Base	
⑰	Transistor		C2 B1 E1 E2 B2 C1	
⑱	Transistor		C1 B2 E2 E1 B1 C2	
⑲	Transistor		C1 B2 E2 E1 B1 C2	
⑳	Transistor		C1 B2 E2 E1 B1 C2	
㉑	Transistor		E2 B1 E1 C2 C1(B2)	
㉒	Transistor		(B2) B1 E1 E2 C1 C2	
㉓	Transistor		(B2) E2 E1 B1 C2 C1	
—	Discrete semiconductot			

(Chip semiconductors that are not actually used are included.)


Ver.1.6

(1) Schematic Diagrams of AE Board

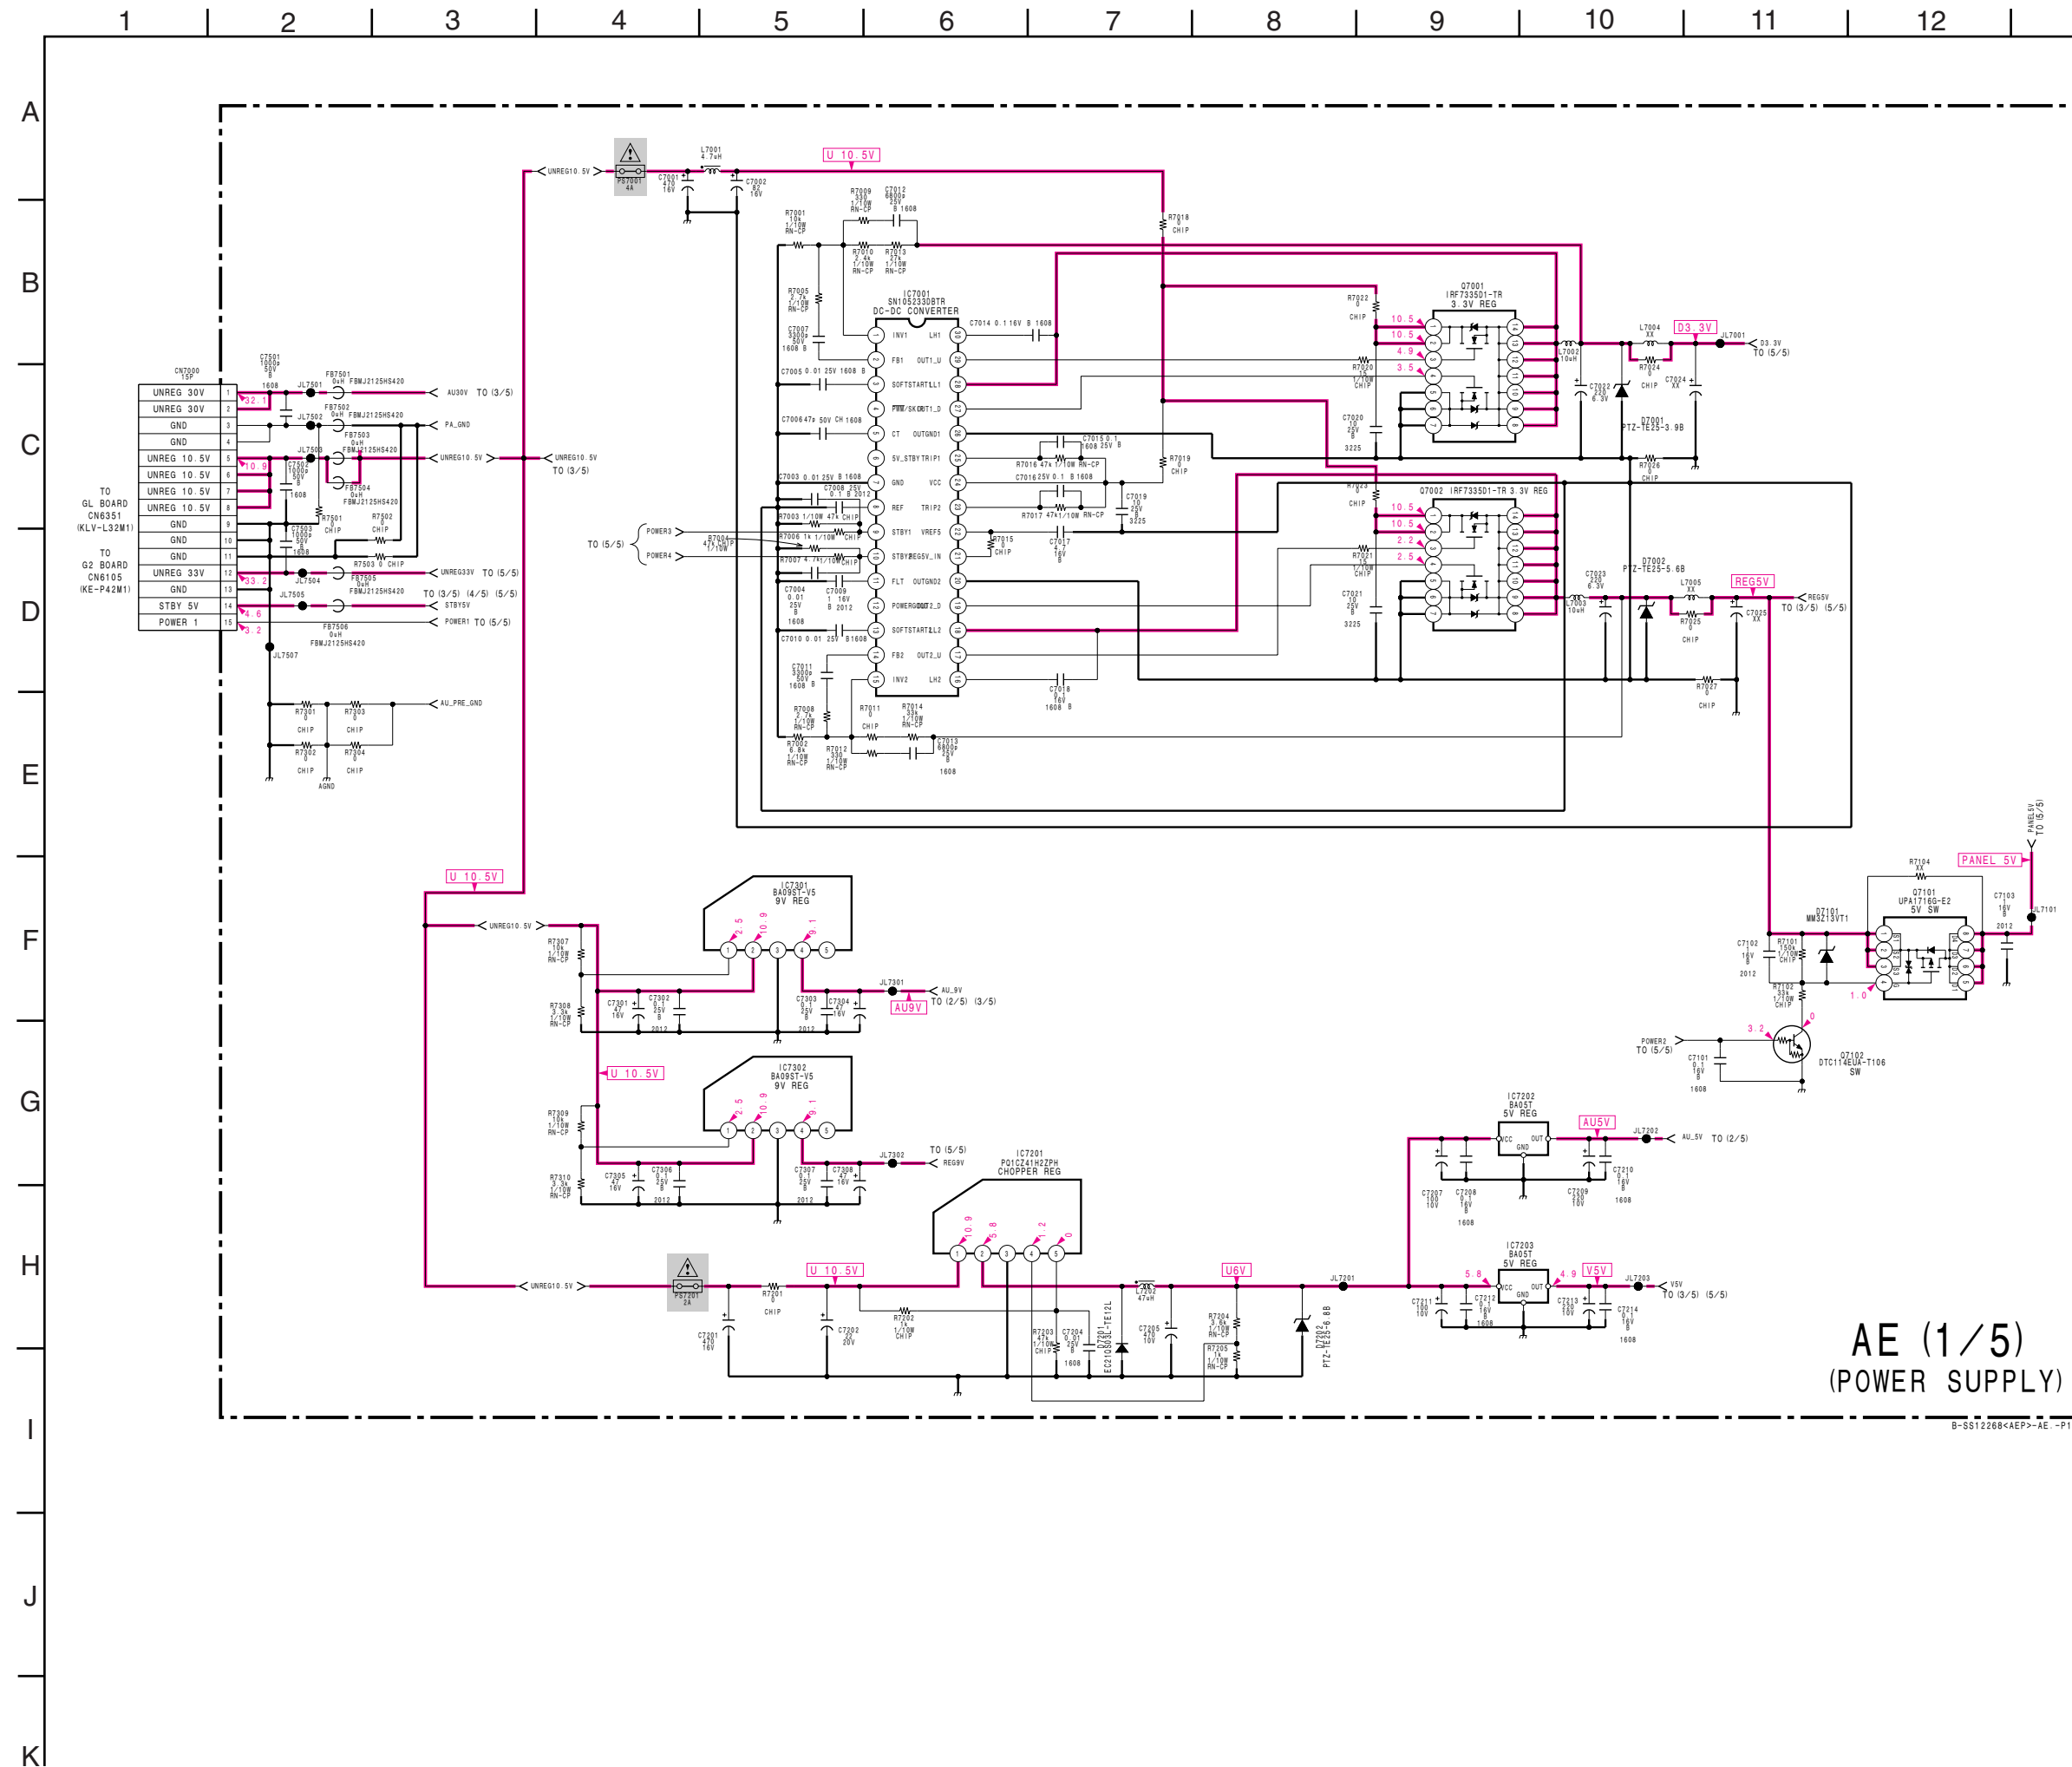

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15


A
B
C
D
E
F
G
H
I
J
K

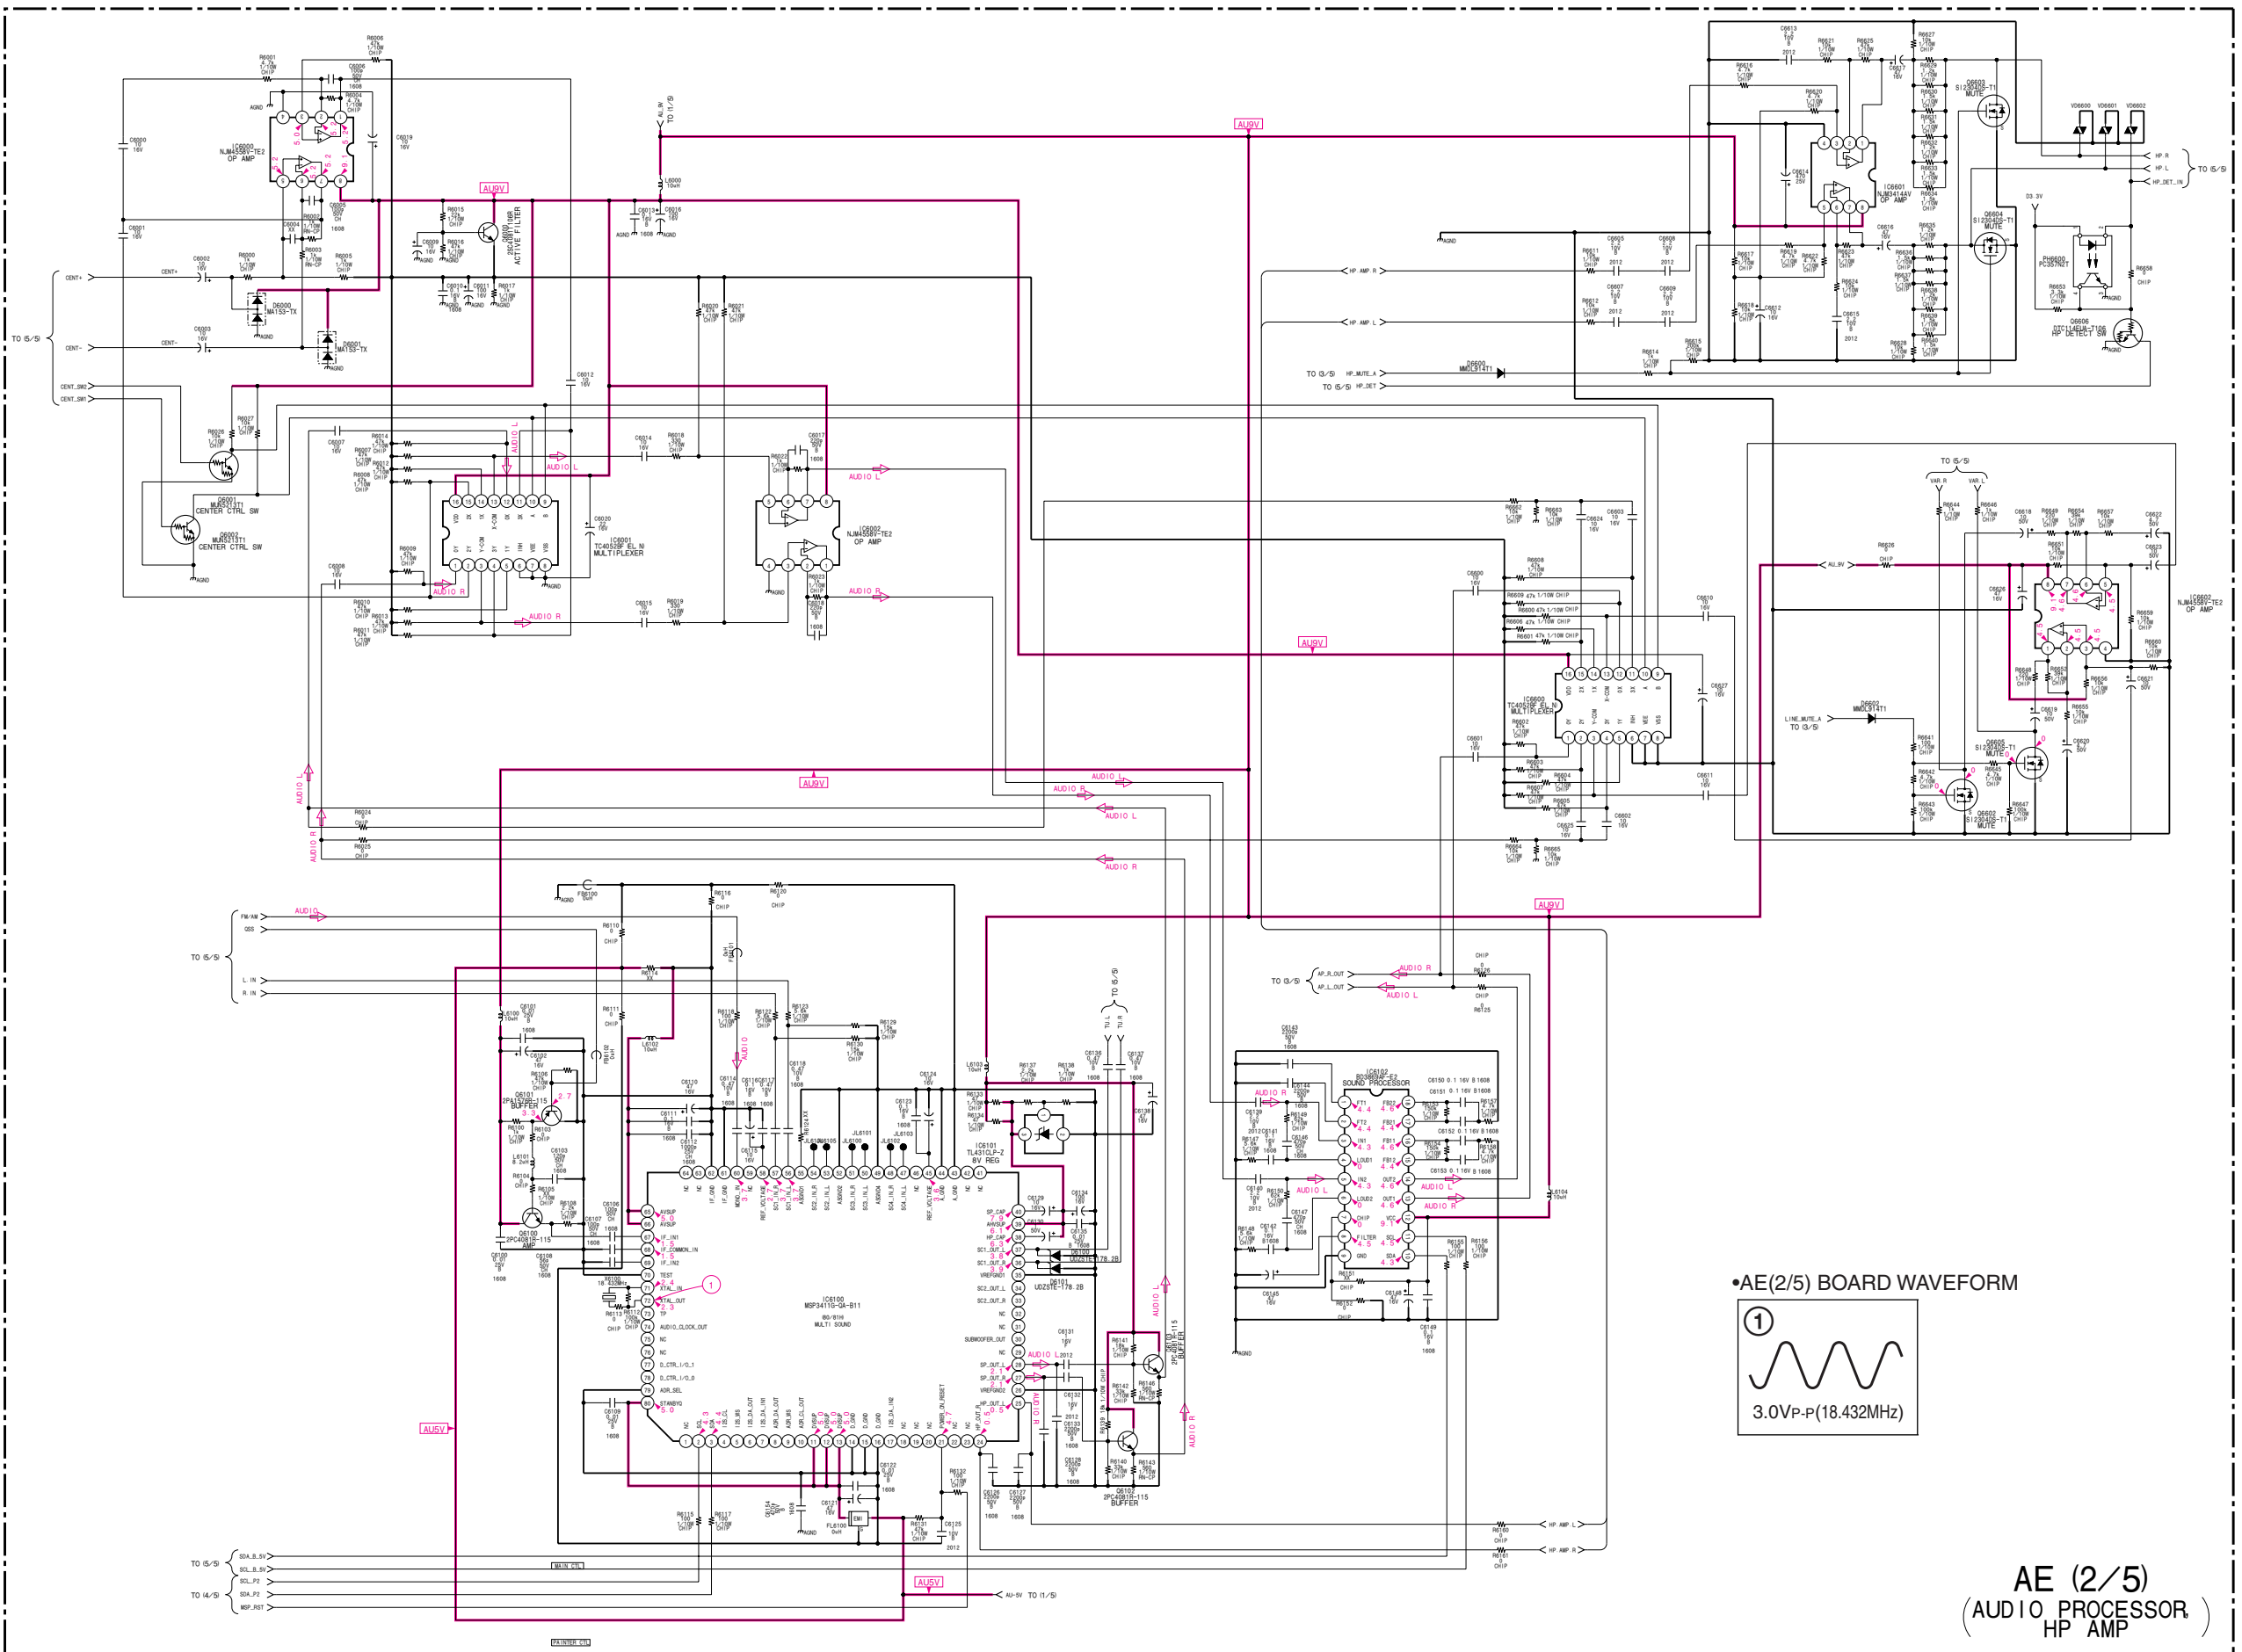



AE (2/5)
(AUDIO PROCESSOR)
HP AMP

B-55122684EP-AE-P2



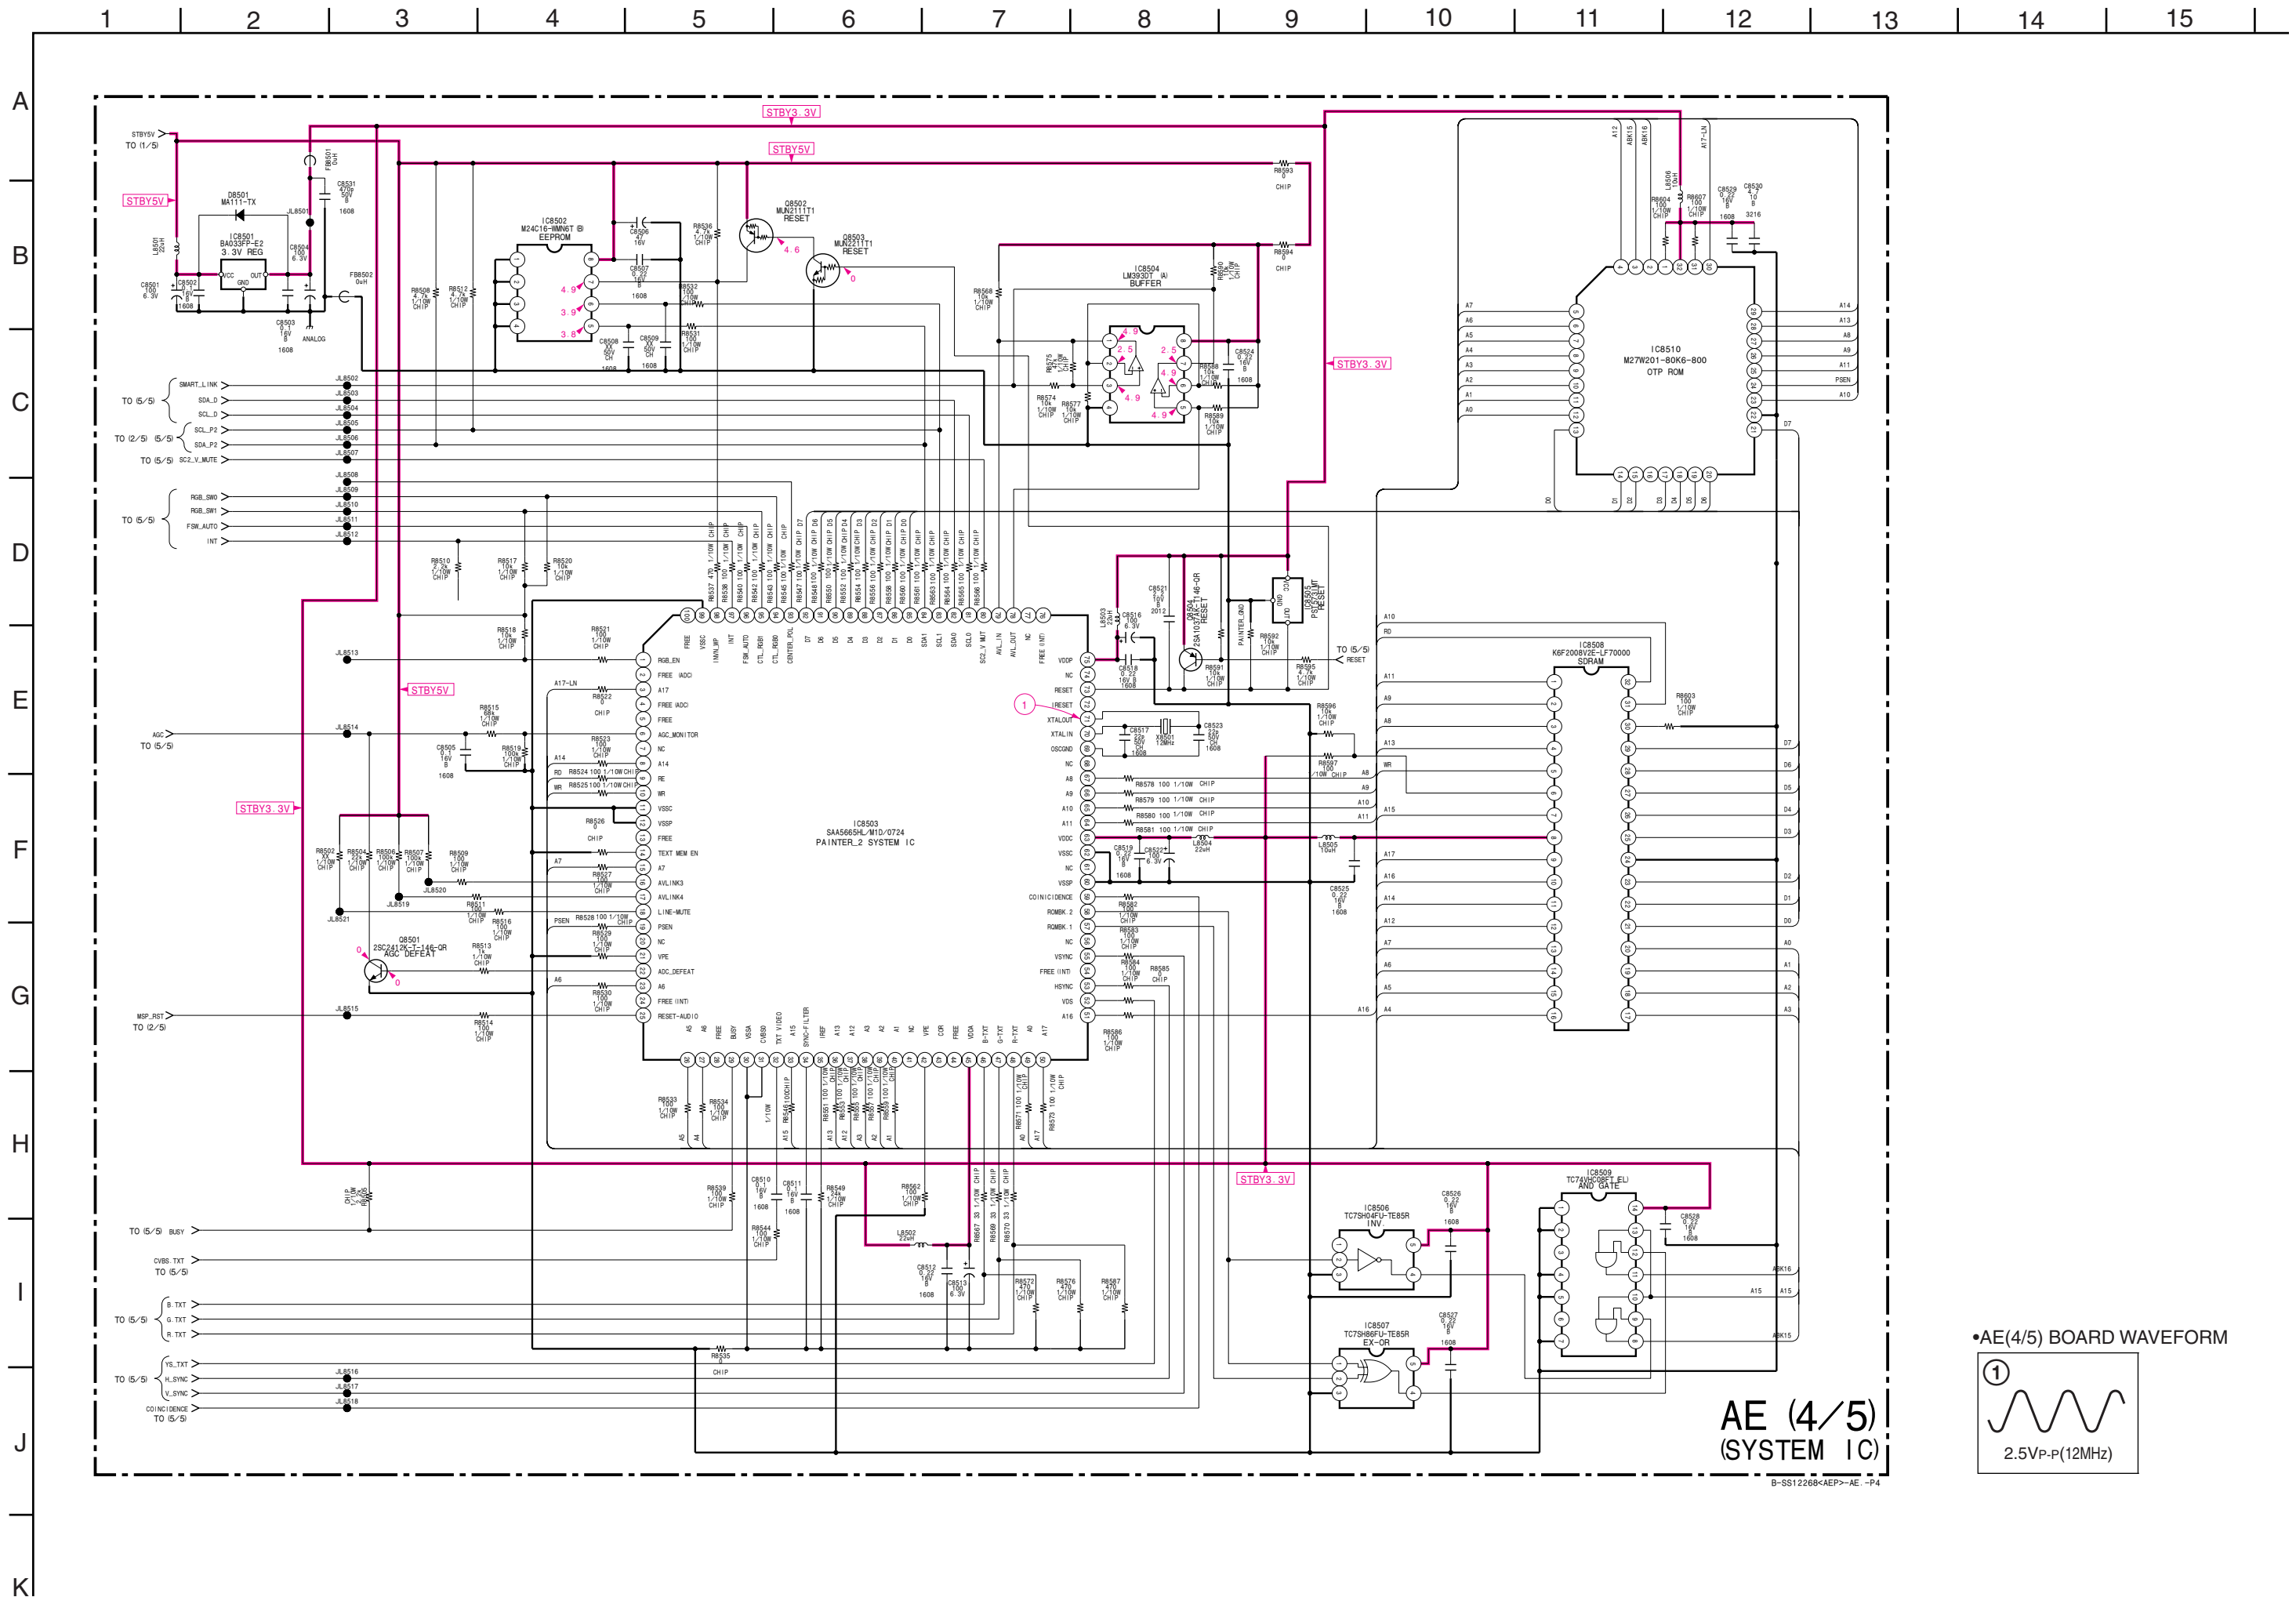

— AE BOARD —

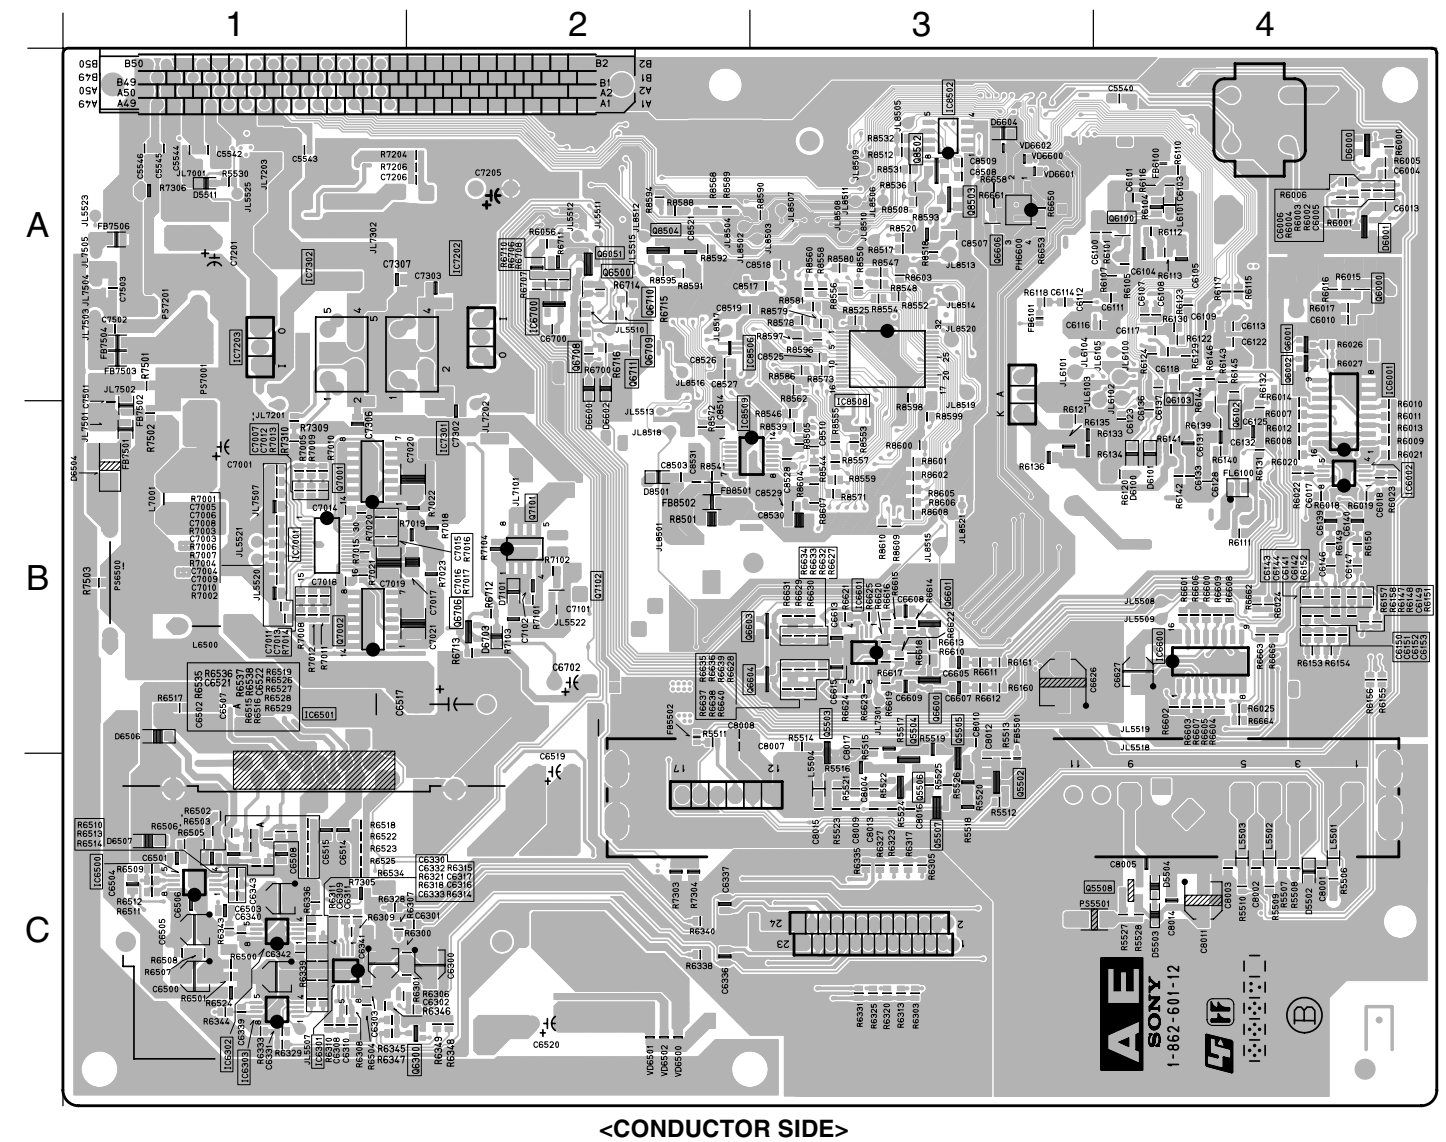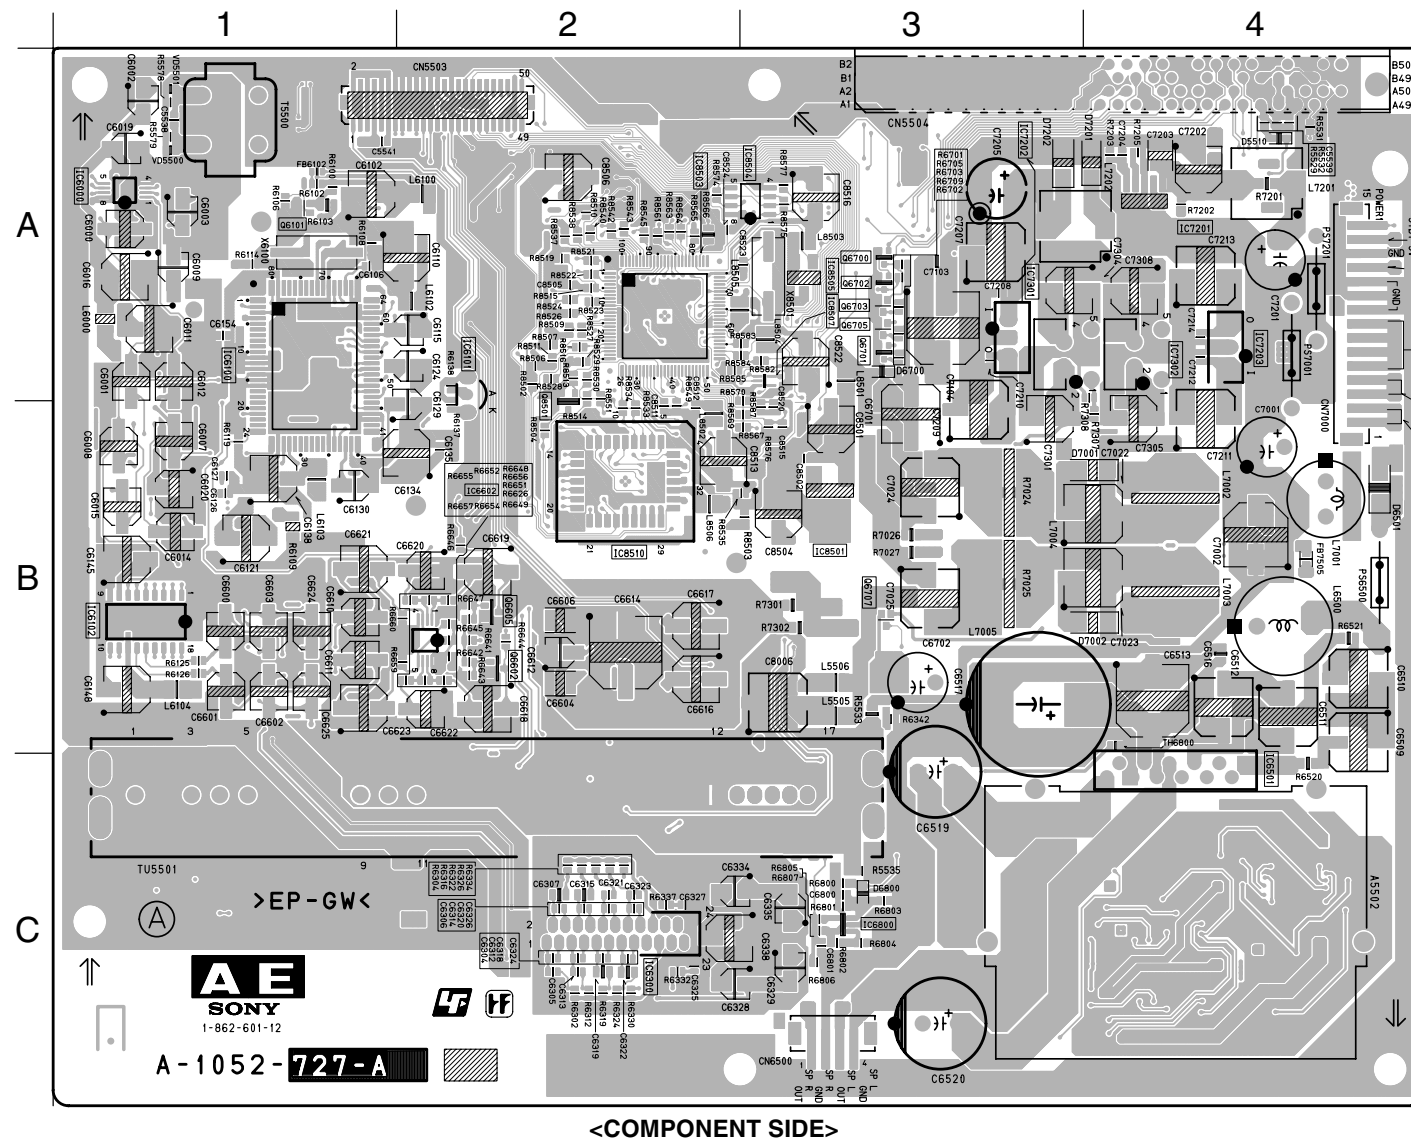



- **AE BOARD SEMICONDUCTOR LOCATION**

IC																				
(Component Side) (Conductor Side)																				
IC6000	A-1		IC7203	A-4		Q5507	C-3	②	Q6707	B-3	②	D6000		A-4	⑦					
IC6001			IC7301	A-3		Q5508	C-4	②	Q6708		A-2 ②	D6001		A-4	⑦					
IC6002		B-4	IC7302	A-4		Q6000	A-4	②	Q6709		A-2 ②	D6100		B-4	③					
IC6100	A-1		IC8501	B-3		Q6001	A-4	②	Q6710		A-2 ②	D6101		B-4	③					
IC6101	A-2		IC8502		A-3	Q6002	A-4	②	Q6711		A-2 ②	D6501	B-4		③					
IC6102	B-1		IC8503	A-2		Q6051	A-2	②	Q7001		B-1 -	D6504		B-1	③					
IC6300	C-2		IC8504	A-3		Q6100	A-4	②	Q7002		B-1 -	D6600		A-2	③					
IC6301		C-1	IC8505	A-3		Q6101	A-1	②	Q7101		B-2 -	D6602		A-2	③					
IC6302		C-1	IC8506		A-2	Q6102	B-4	②	Q7102		B-2 -	D6700	C-3		③					
IC6303	C-1		IC8507	A-3		Q6103	A-4	②	Q8501	B-2	②	D6703		B-2	③					
IC6500		C-1	IC8508		A-3	Q6300	C-2	②	Q8502		A-3 ②	D6800	C-3		③					
IC6501	C-4		IC8509		B-2	Q6500	A-2	②	Q8503		A-3 ②	D7001	B-4		③					
IC6600		B-4	IC8510	B-2		Q6602	B-2	⑬	Q8504		A-2 ②	D7002	B-4		③					
IC6601		B-3	TRANSISTOR			Q6603		B-3 ⑬	DIODE			D7101		B-2	③					
IC6602	B-2		(Component Side) (Conductor Side) *			Q6604		B-3 ⑬				D7201	A-4		③					
IC6700		A-2	Q5502	C-3	②	Q6605	B-2	⑬				D7202	A-3		③					
IC6800	C-3		Q5503	B-3	②	Q6606		A-3 ②				D8501		B-2	③					
IC7001		B-1	Q5504	C-3	②	Q6700	A-3	②				D5502		C-4	③					
IC7201	A-4		Q5505	C-3	②	Q6701	A-3	②				D5503		C-4	③					
IC7202	A-3		Q5506	C-3	②	Q6702	A-3	②				D5504		C-4	③					
						Q6703	A-3	②				D5510	A-4		③					
						Q6705	A-3	②				D5511		A-1	③					
						Q6706	B-2	②												

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)


(2) Schematic Diagrams of BL Board

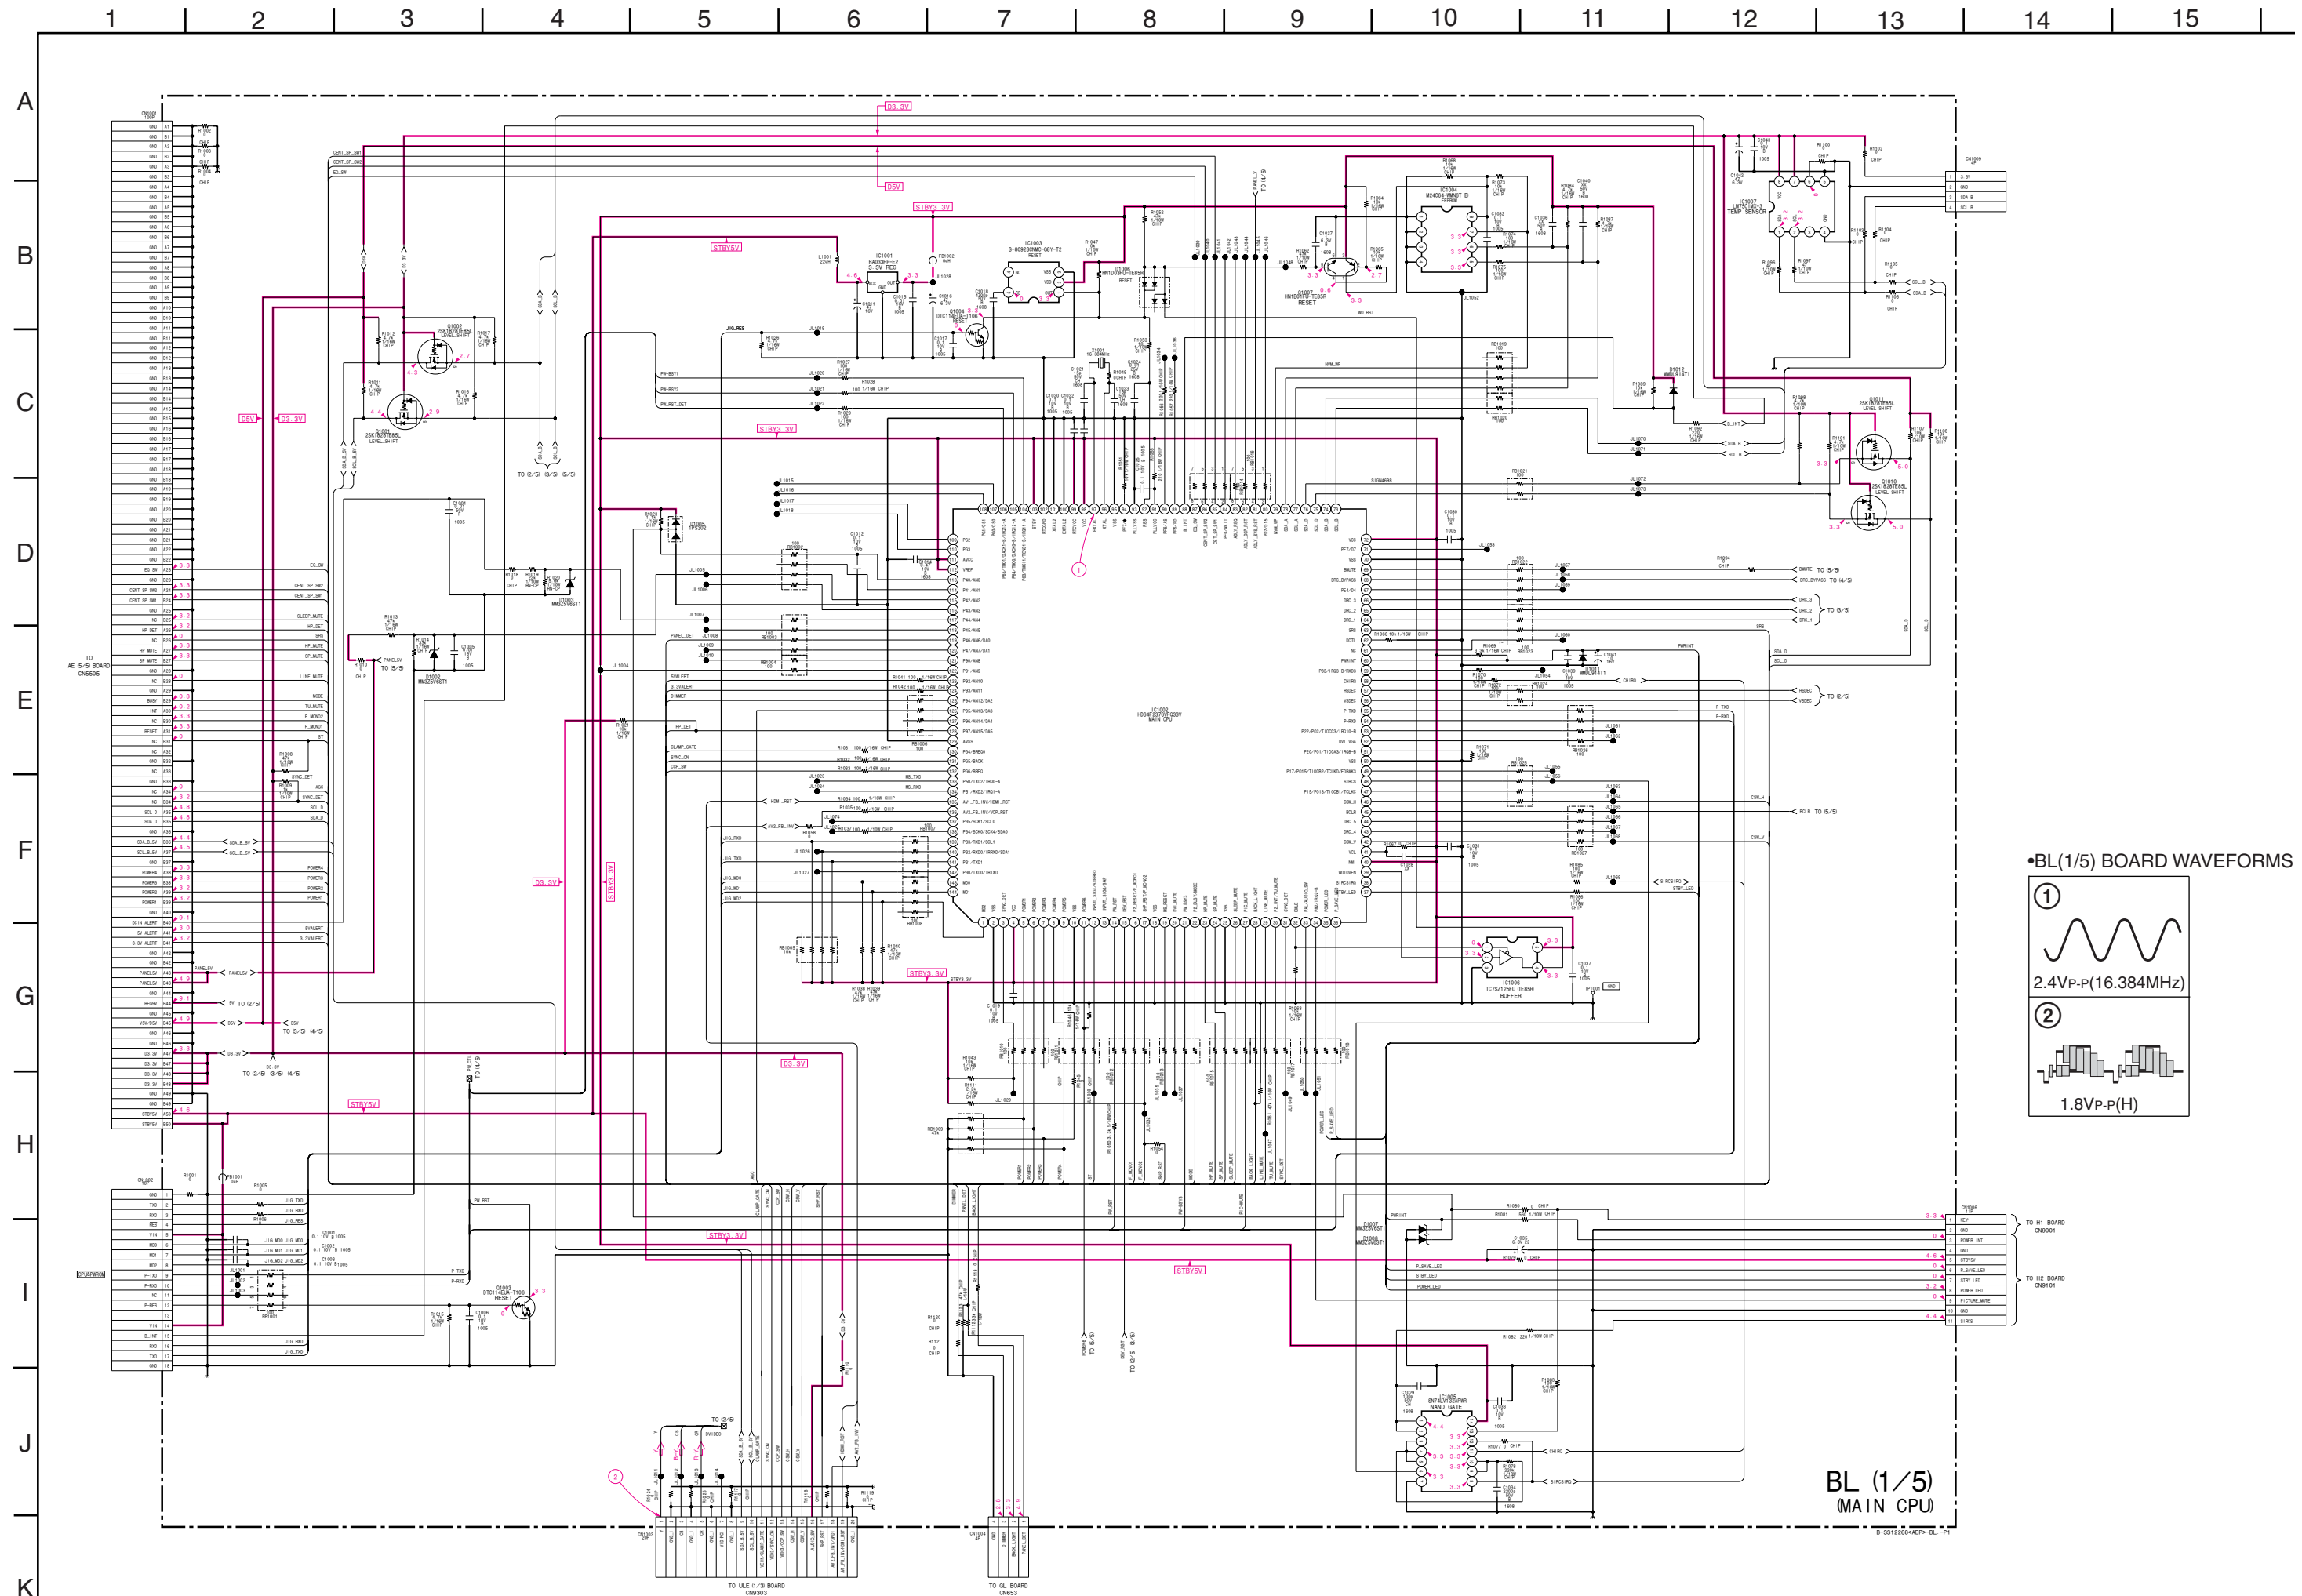




1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

A
B
C
D
E
F
G
H
I
J
K

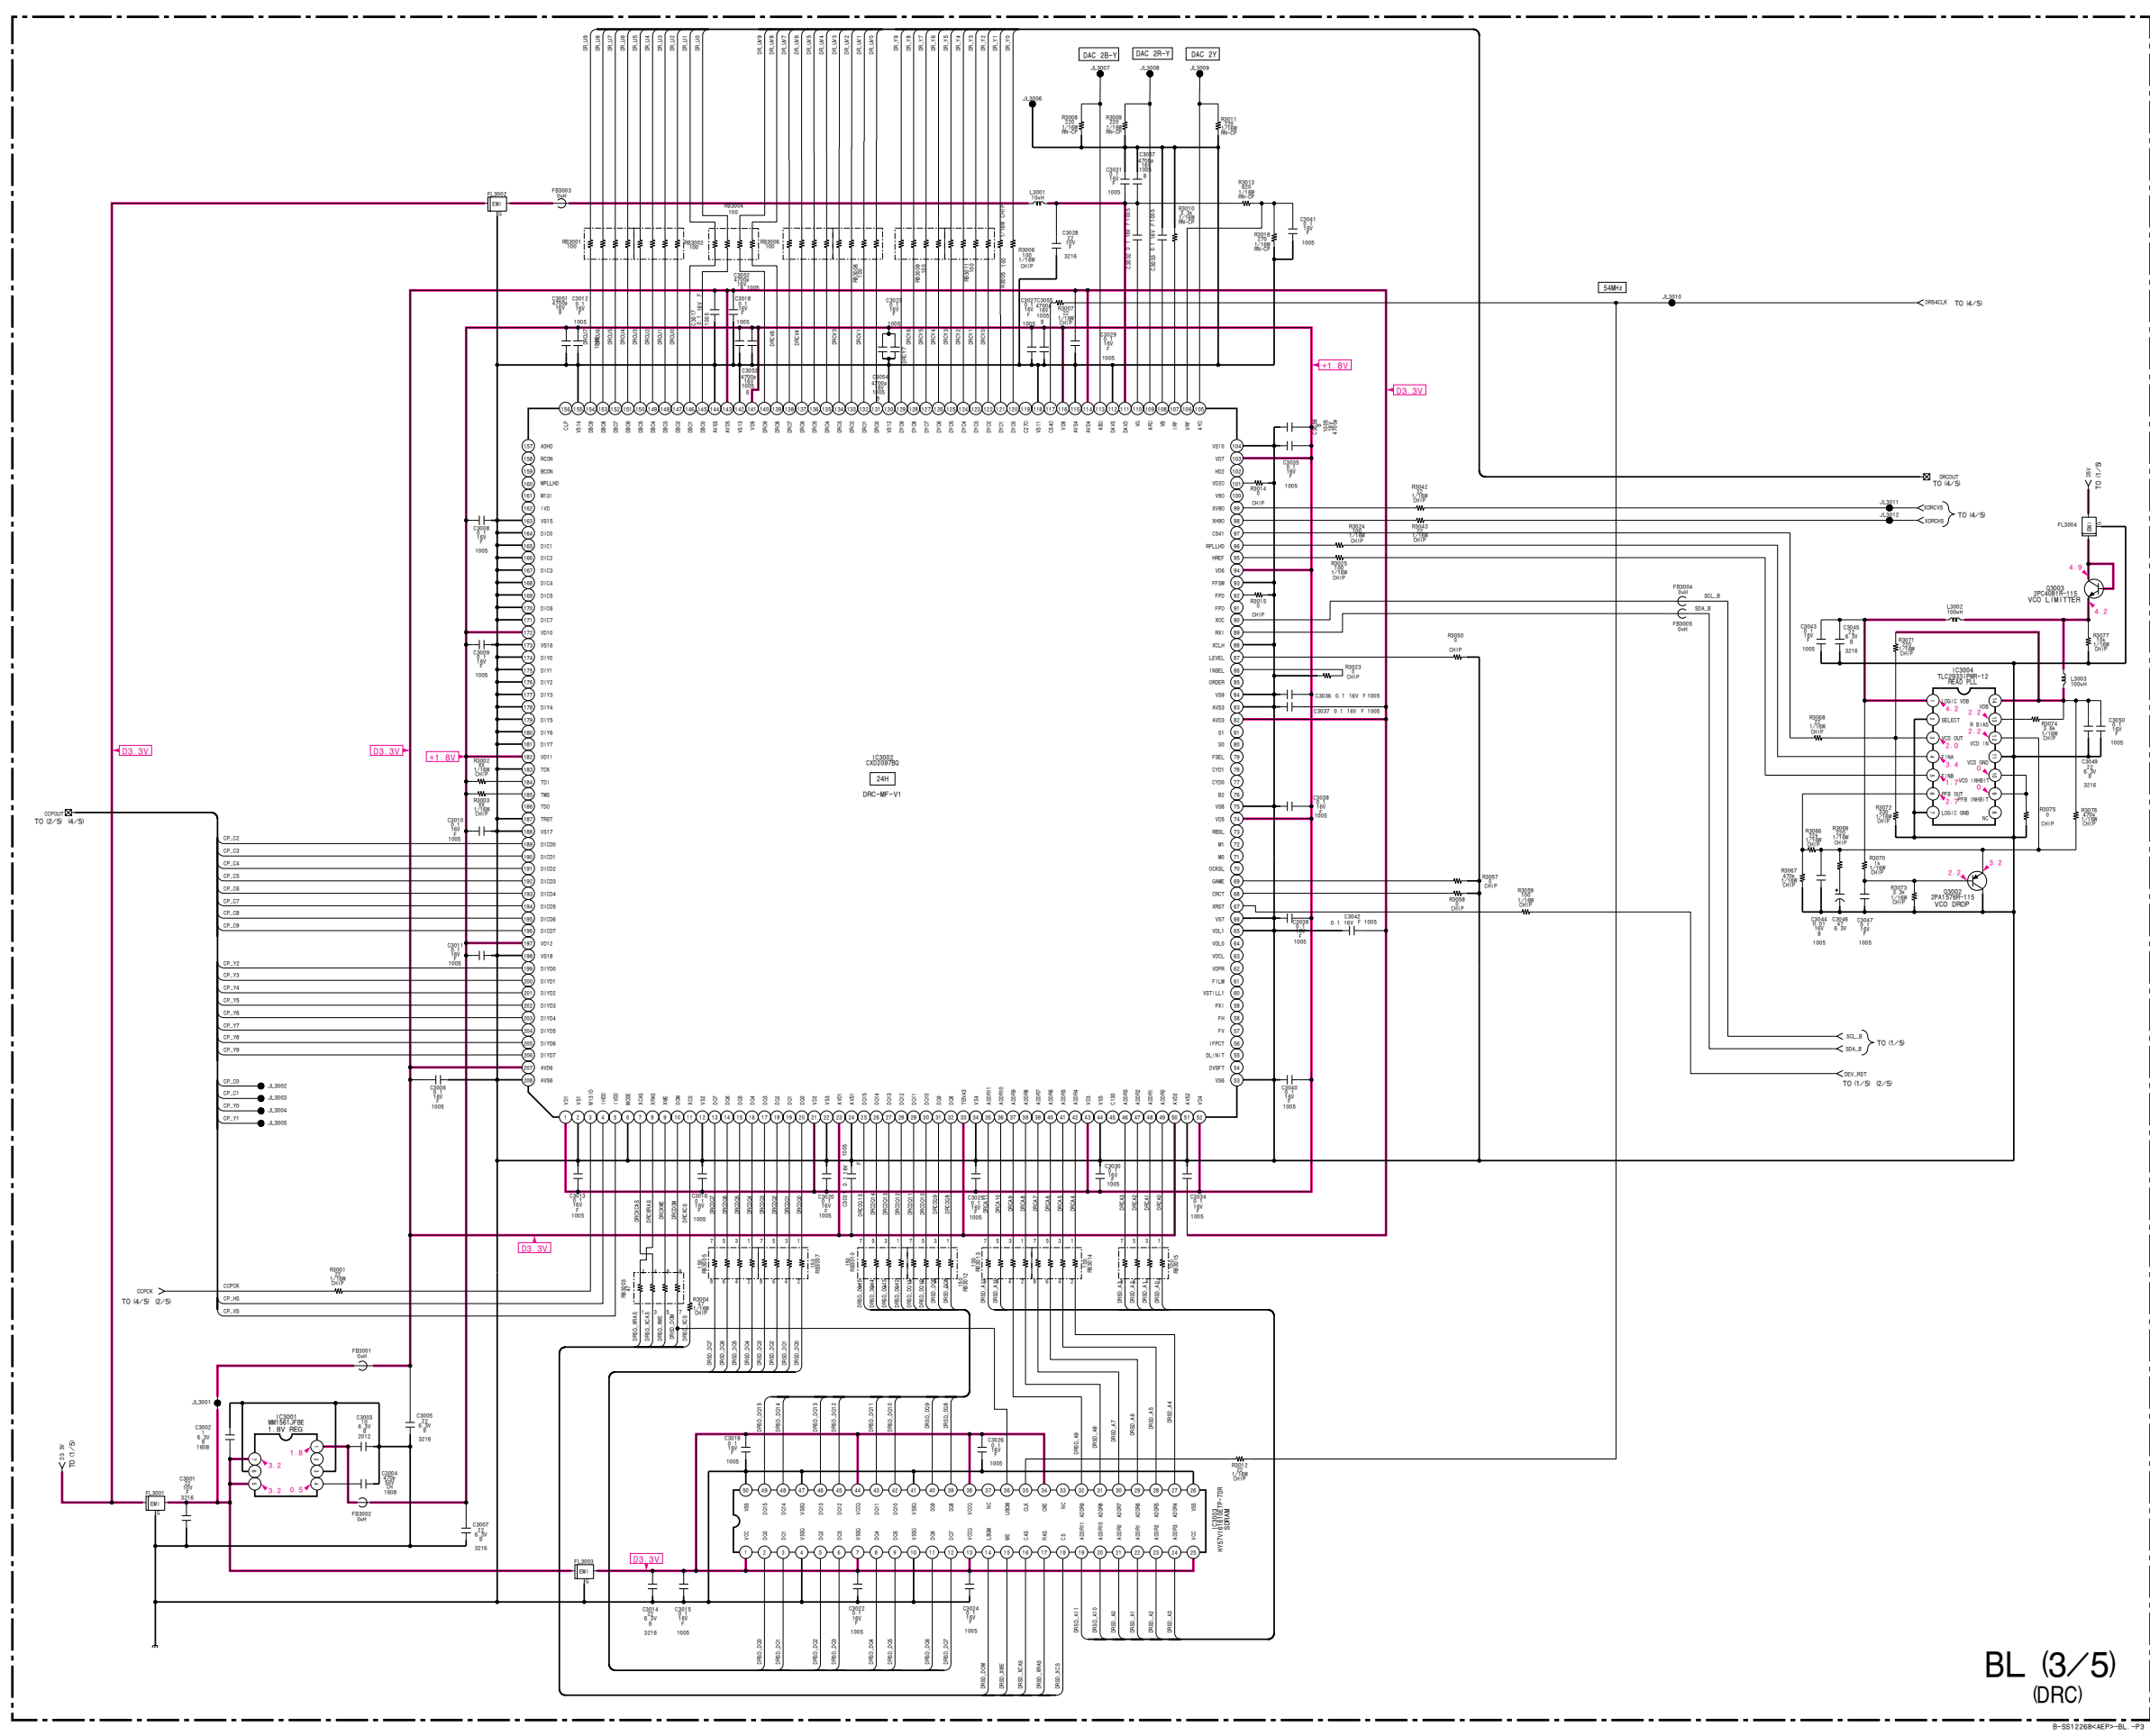


BL (3/5)
(DRC)



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15


A
B
C
D
E
F
G
H
I
J
K

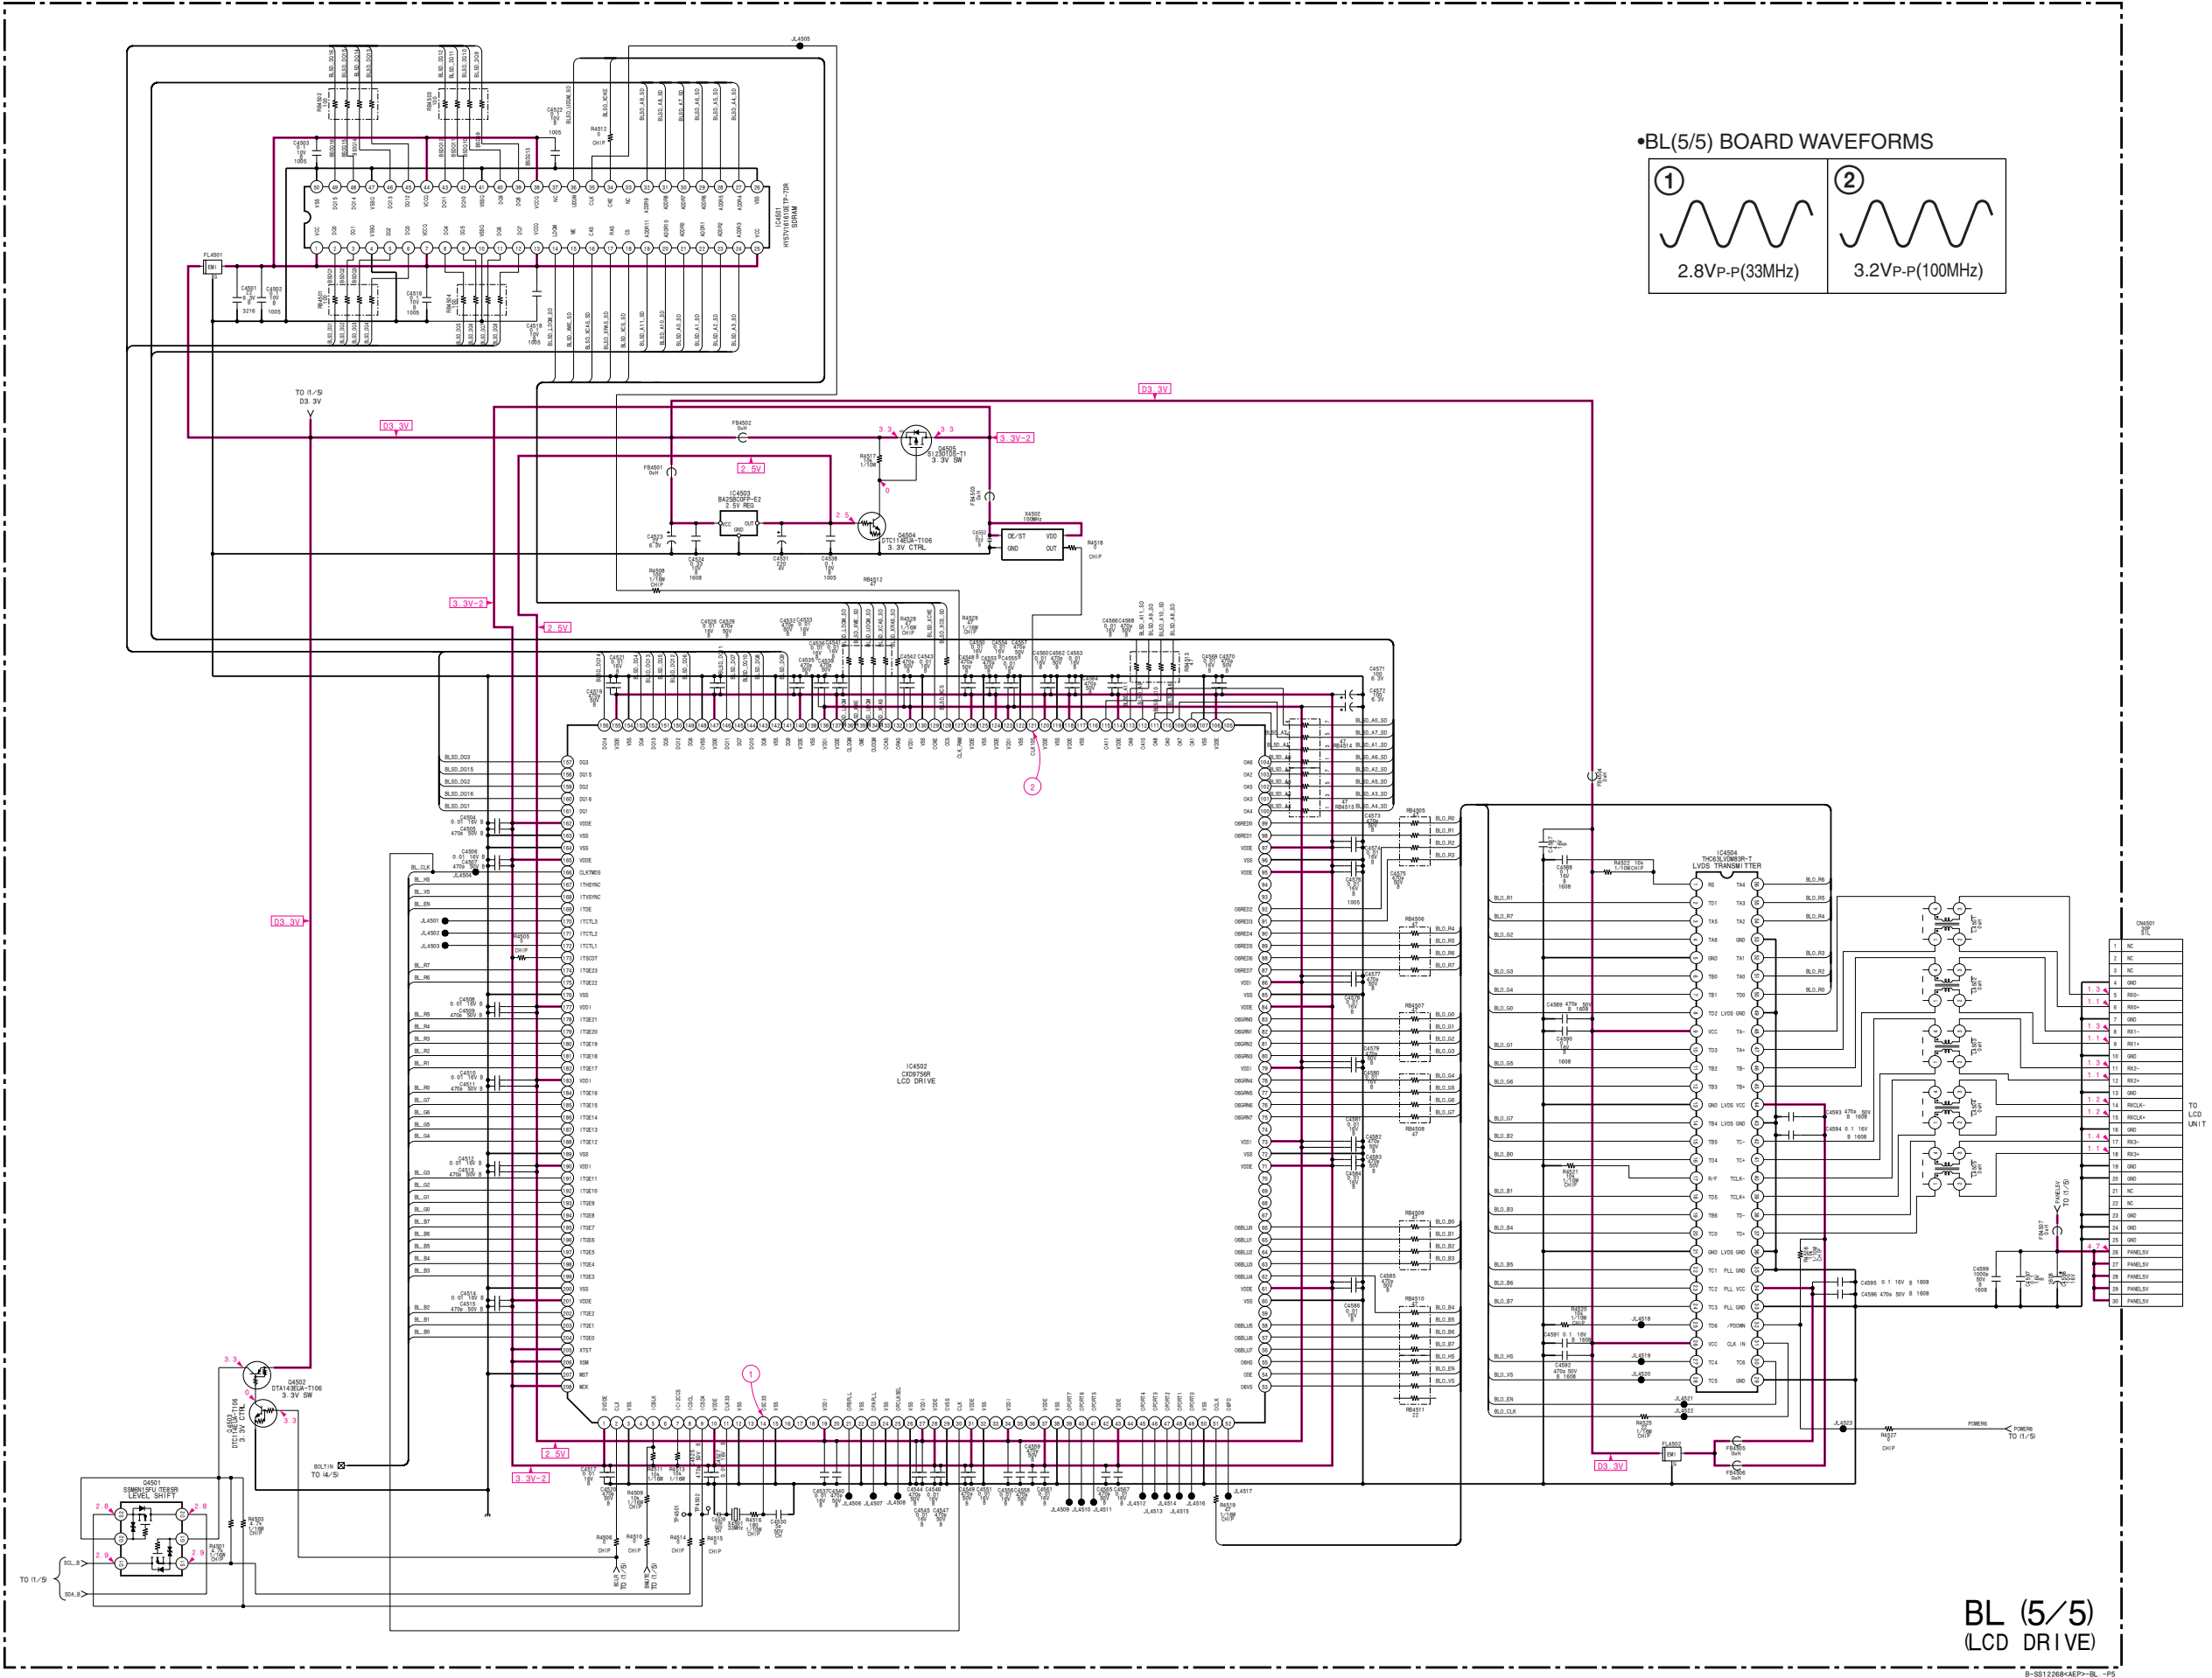


BL

[MAIN CPU, CHROME DECODER, 3D COMB FILTER, DRC, SCAN CONVERTER, LCD DRIVE]

— BL BOARD —

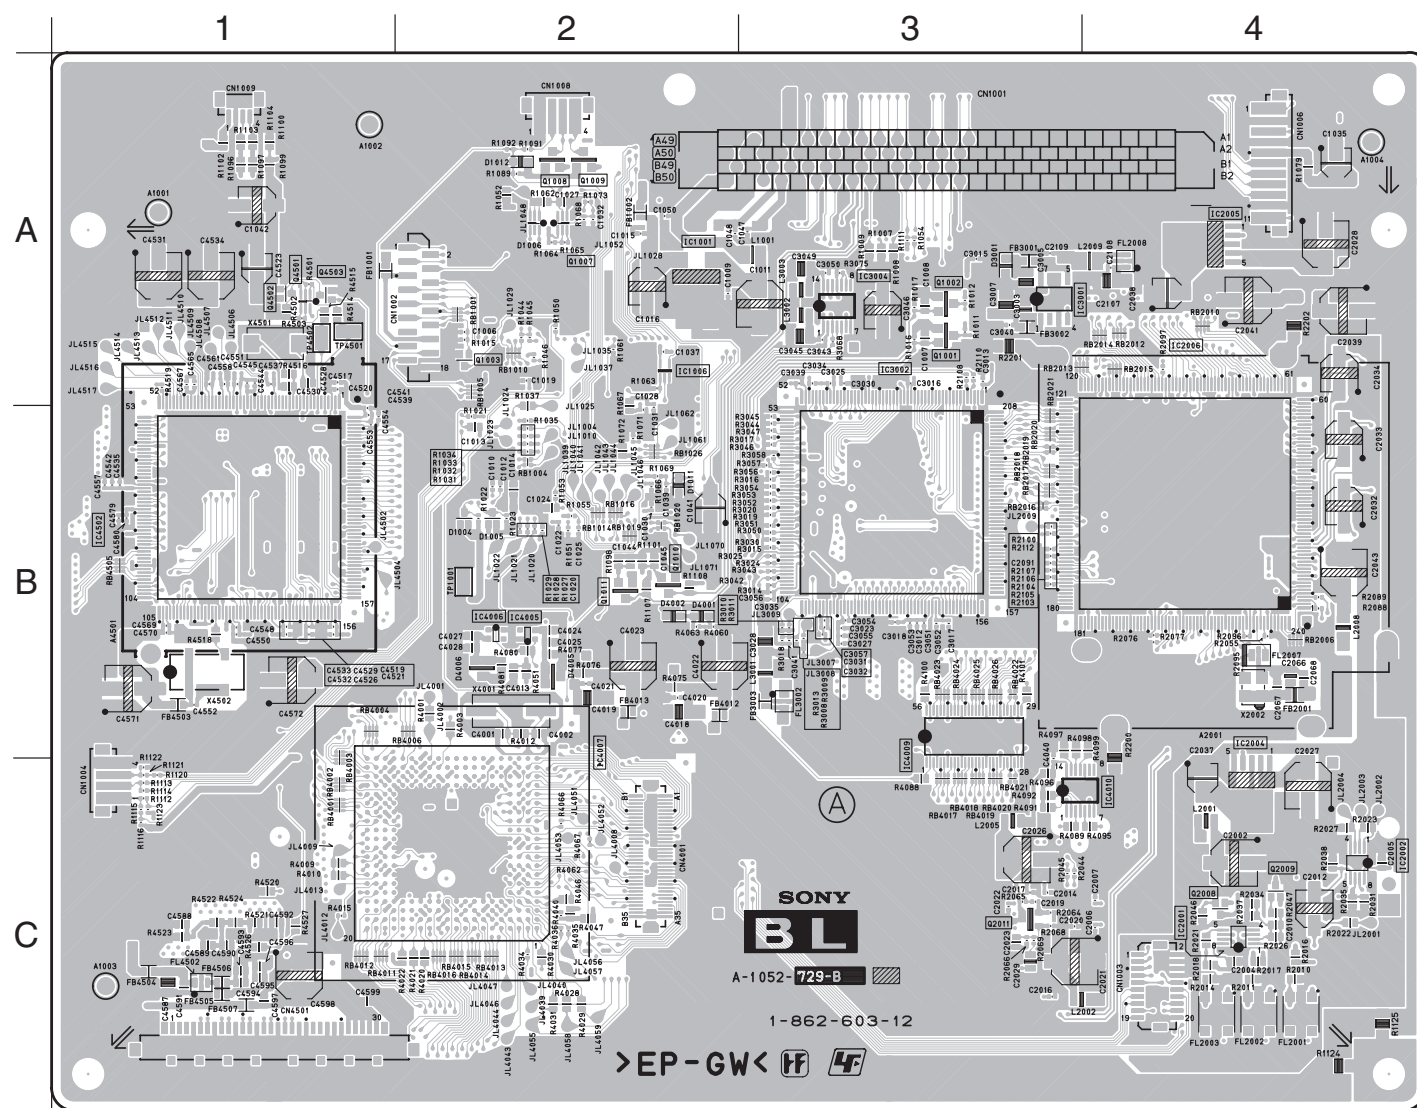

<COMPONENT SIDE>

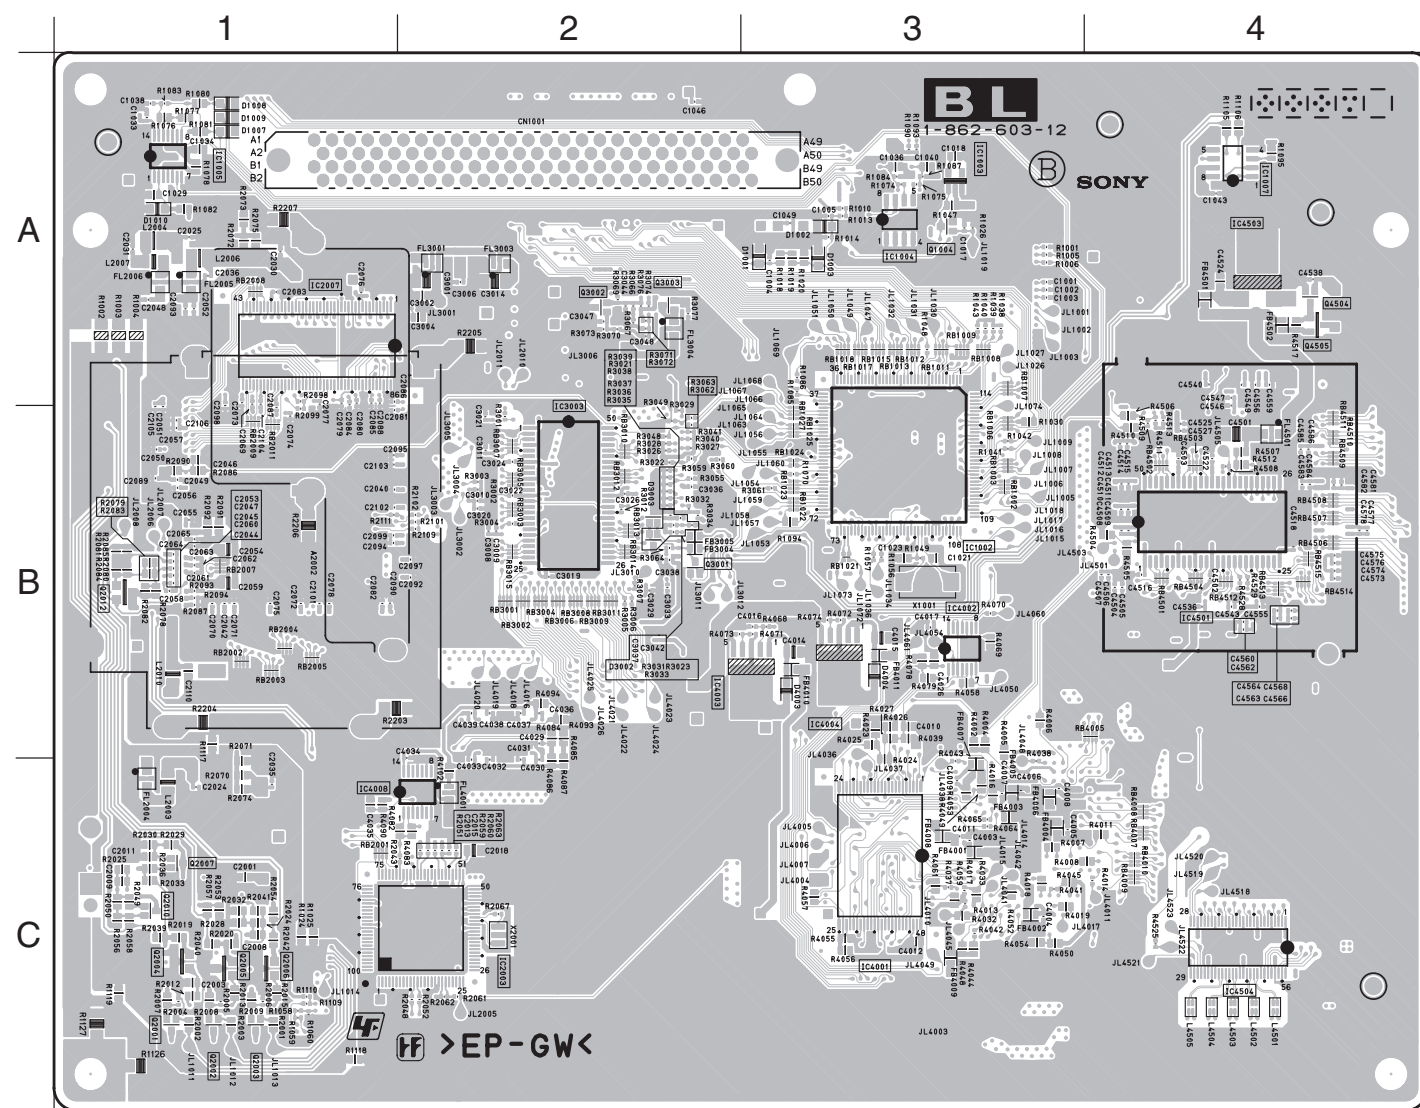


<CONDUCTOR SIDE>


• BL BOARD SEMICONDUCTOR LOCATION

IC		DIODE	
(Component Side)	(Conductor Side)	(Component Side)	(Conductor Side)
IC1001	A-2	D1002	A-2
IC1002	B-3	D1003	A-3
IC1003	A-3	D1005	A-3
IC1004	A-3	D1006	A-2
IC1005	A-1	D1007	A-1
IC1006	A-2	D1008	A-1
IC1007	A-4	D1011	B-2
IC2001	C-4	D1012	B-2
IC2002	C-4	D4002	B-2
IC2004	C-4	D4003	B-3
IC2005	A-4	D4004	B-3
IC2006	B-4	D4005	B-2
IC2007	A-1	D4006	B-2
IC3001	A-3		
IC3002	B-3		
IC3003	B-2		
IC3004	A-3		
IC4001	C-3		
IC4002	B-3		
IC4003	B-3		
IC4004	B-3		
IC4005	B-2		
IC4006	B-2		
IC4007	C-2		
IC4009	B-3		
IC4010	C-3		
IC4501	B-4		
IC4502	B-1		
IC4503	A-4		
IC4504	C-4		
TRANSISTOR			
(Component Side)	(Conductor Side)		
Q1001	A-3		
Q1002	A-3		
Q1003	A-2		
Q1004	A-3		
Q1007	A-2		
Q1010	B-2		
Q1011	B-2		
Q2001	C-1		
Q2002	C-1		
Q2003	C-1		
Q2004	C-1		
Q2005	C-1		
Q2006	C-1		
Q2007	C-1		
Q2008	C-4		
Q2009	C-4		
Q2012	B-1		
Q3002	A-2		
Q3003	A-2		
Q4501	A-1		
Q4502	A-1		
Q4503	A-1		
Q4504	A-4		
Q4505	A-4		


*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)

(3) Schematic Diagrams of GL Board

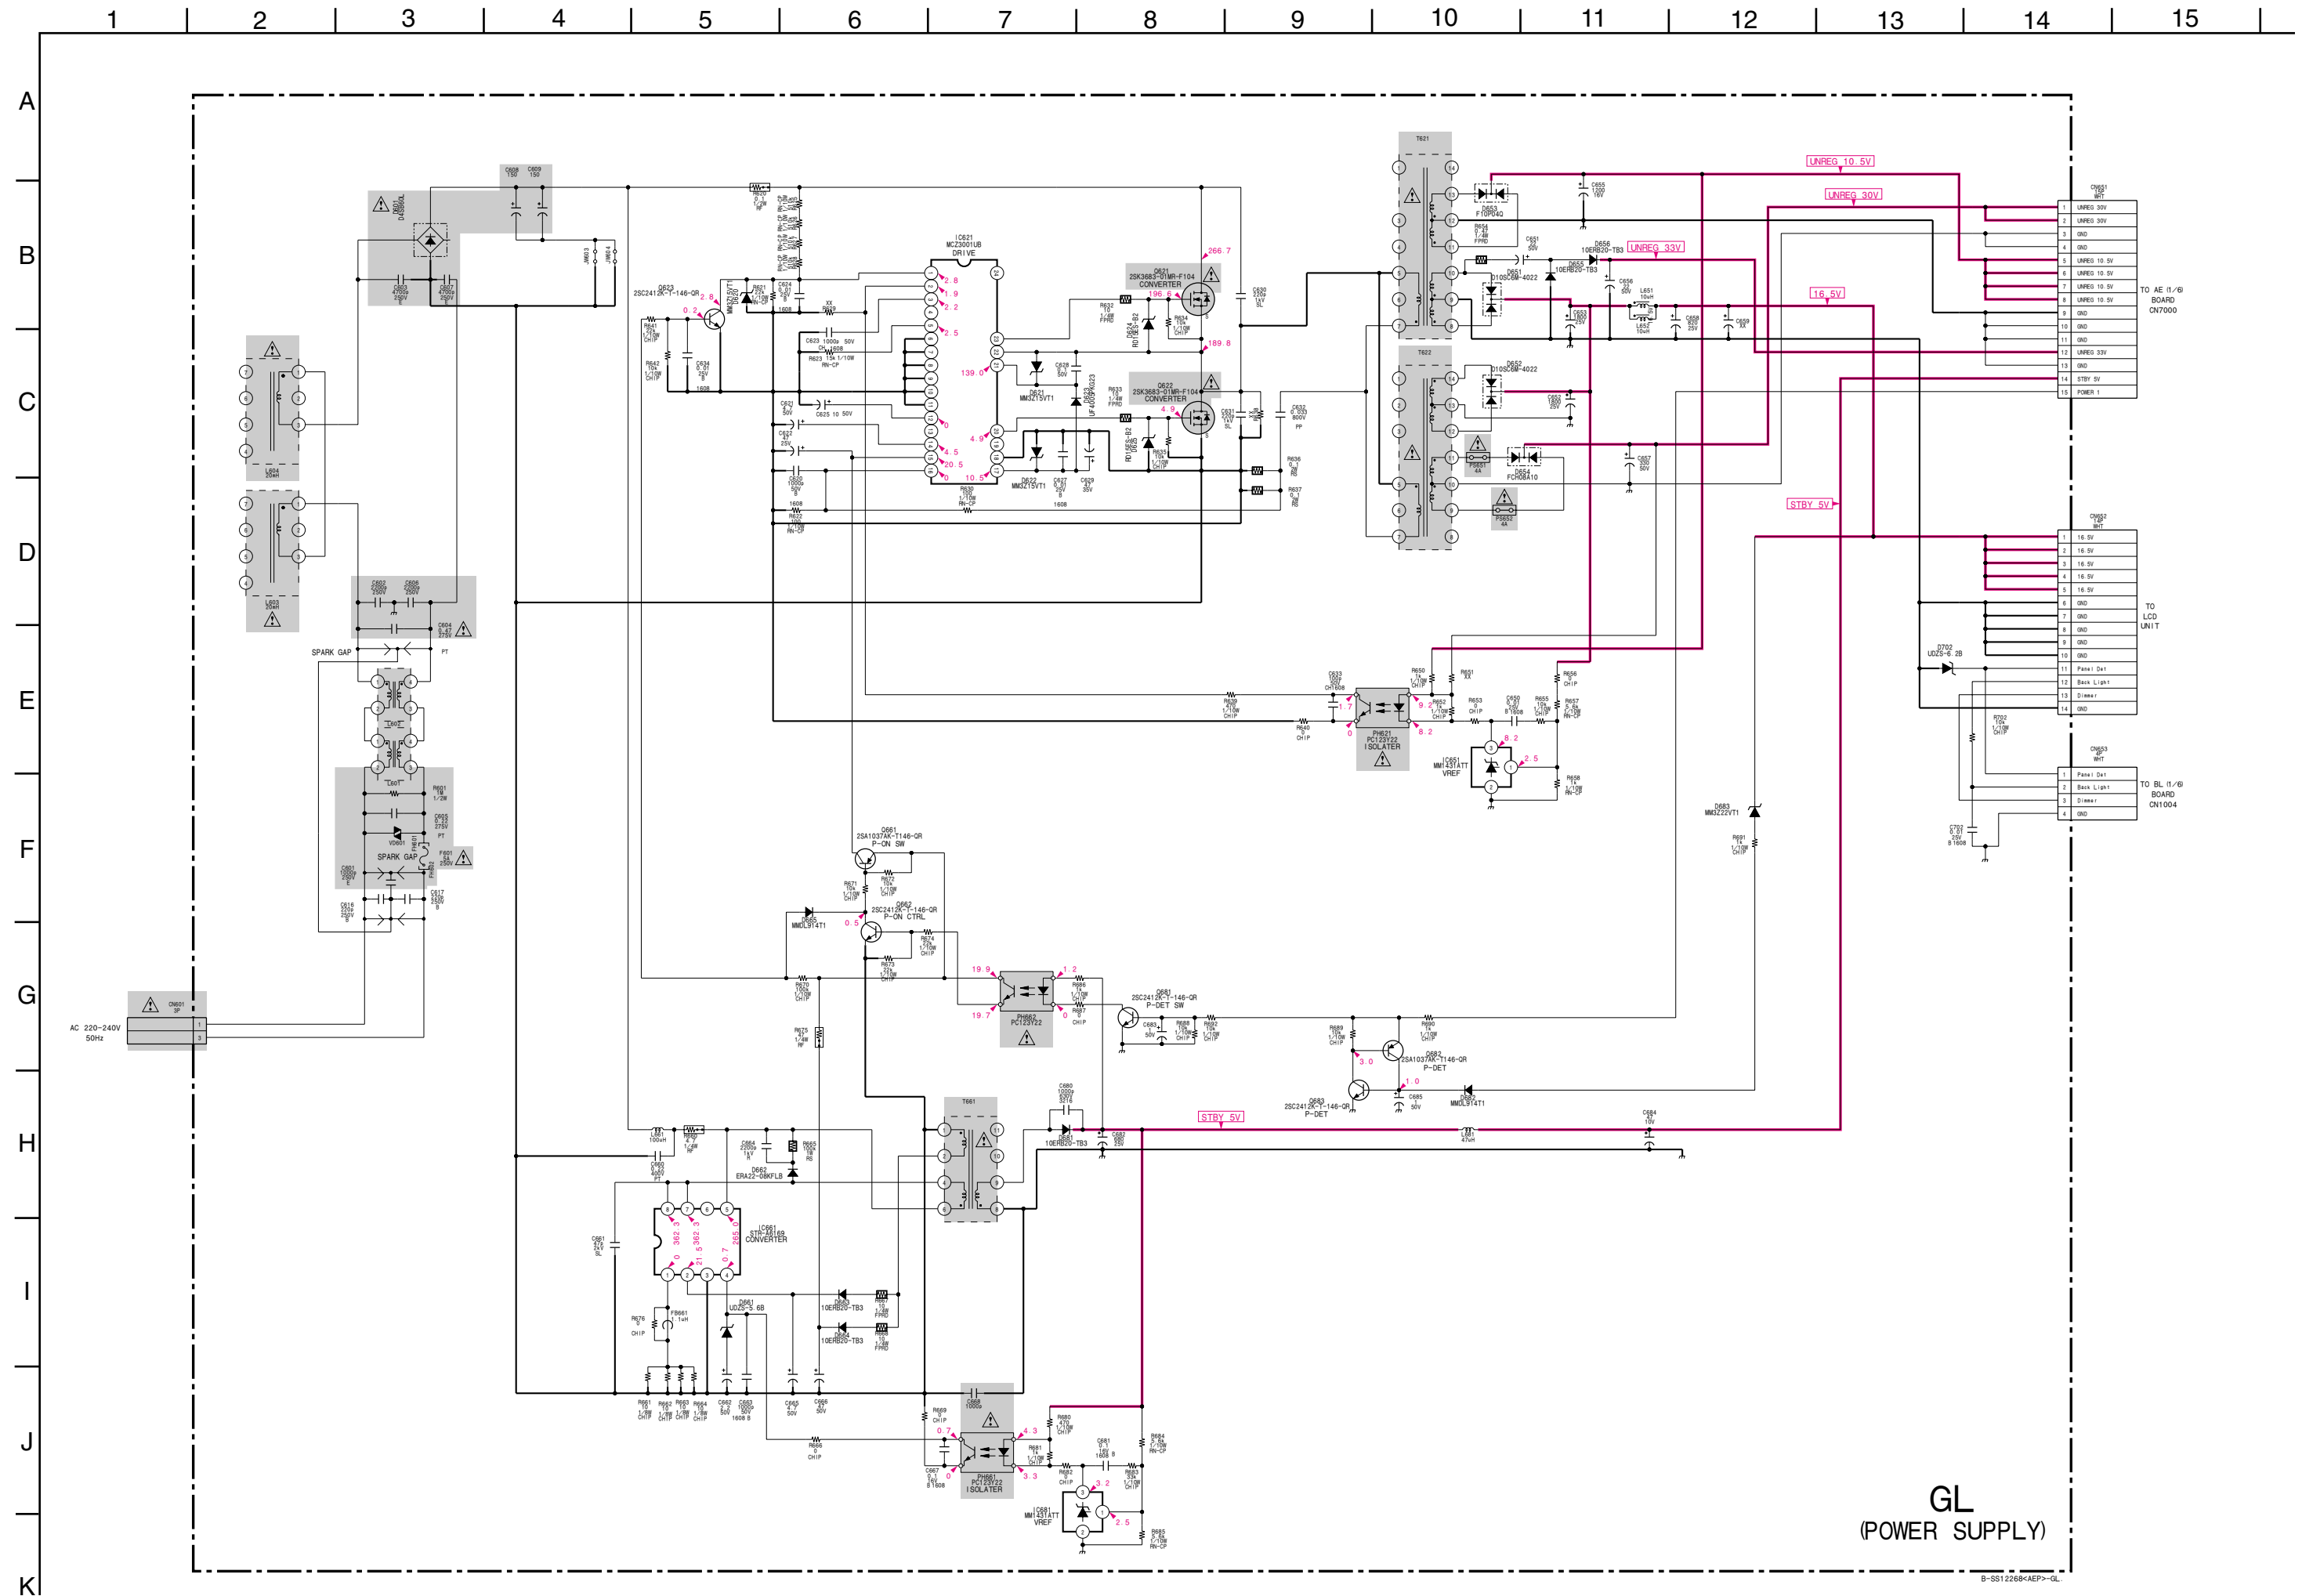

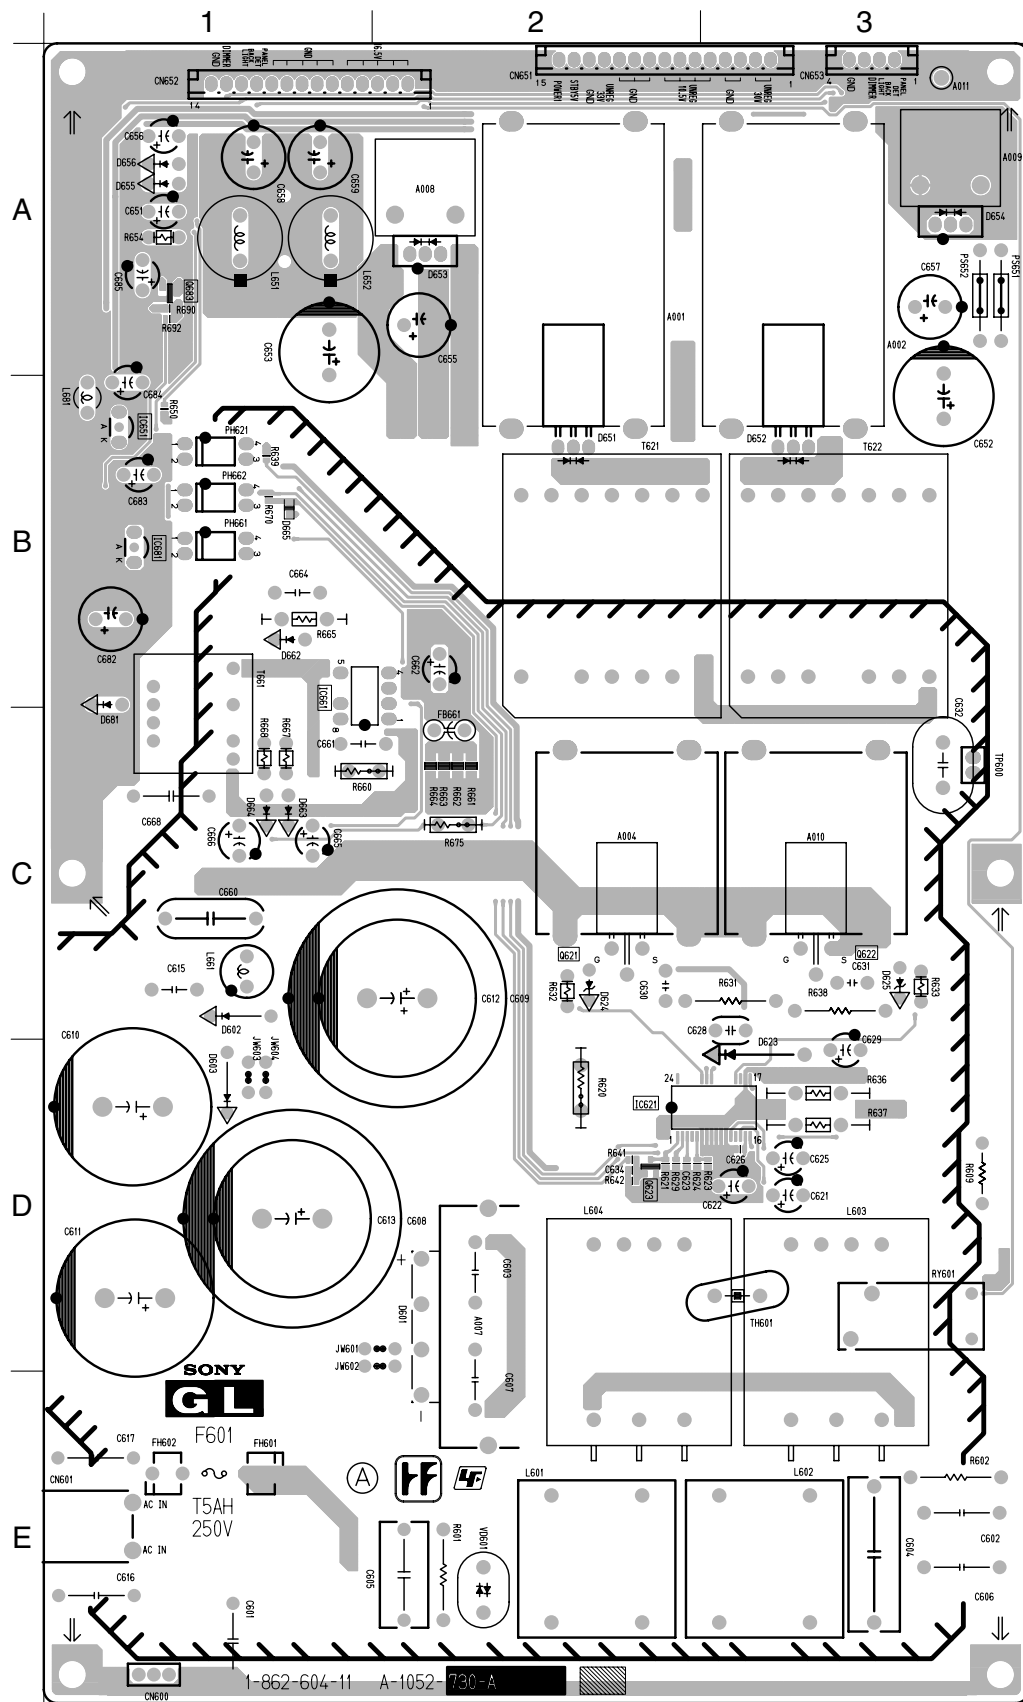

<COMPONENT SIDE>

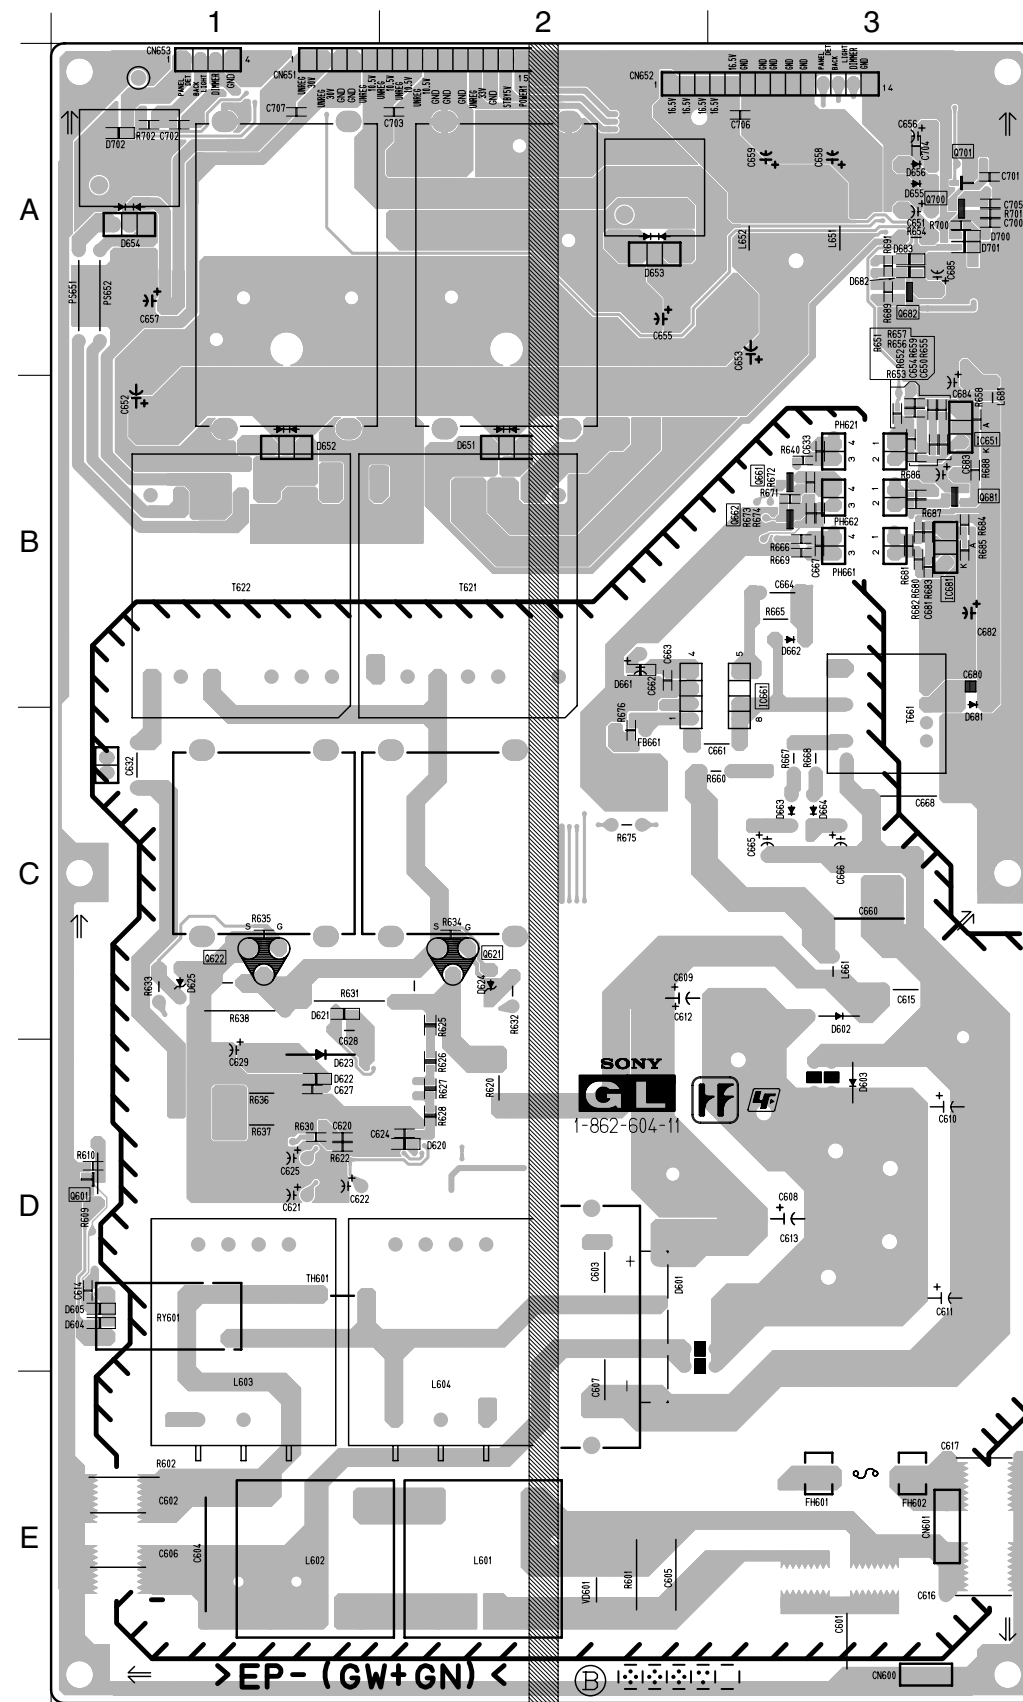

<CONDUCTOR SIDE>

- **GL BOARD SEMICONDUCTOR LOCATION**


IC			
	(Component Side)	(Conductor Side)	
IC621	D-3		
IC651	B-1		
IC661	B-1		
IC681	B-1		

TRANSISTOR			
	(Component Side)	(Conductor Side)	*
Q621	C-2		-
Q622	C-3		-
Q623	D-2		②
Q661		B-3	②
Q662		B-3	②
Q681		B-3	②
Q682		A-3	②
Q683	A-1		-

DIODE			
	(Component Side)	(Conductor Side)	*
D601	D-2		-
D620		D-2	③
D621		C-1	③
D622		D-1	③
D623	D-3		-
D624	C-2		-
D625	C-3		-
D651	B-2		-
D652	B-3		-
D653	A-2		-
D654	A-3		-
D655	A-1		-
D656	A-1		-
D661		B-2	-
D662	B-1		-
D663	C-1		-
D664	C-1		-
D665	B-1		③
D681	B-1		-
D682		A-3	③
D683		A-3	③
D702		A-1	③


*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)

(4) Schematic Diagram of H1 and H2 Boards

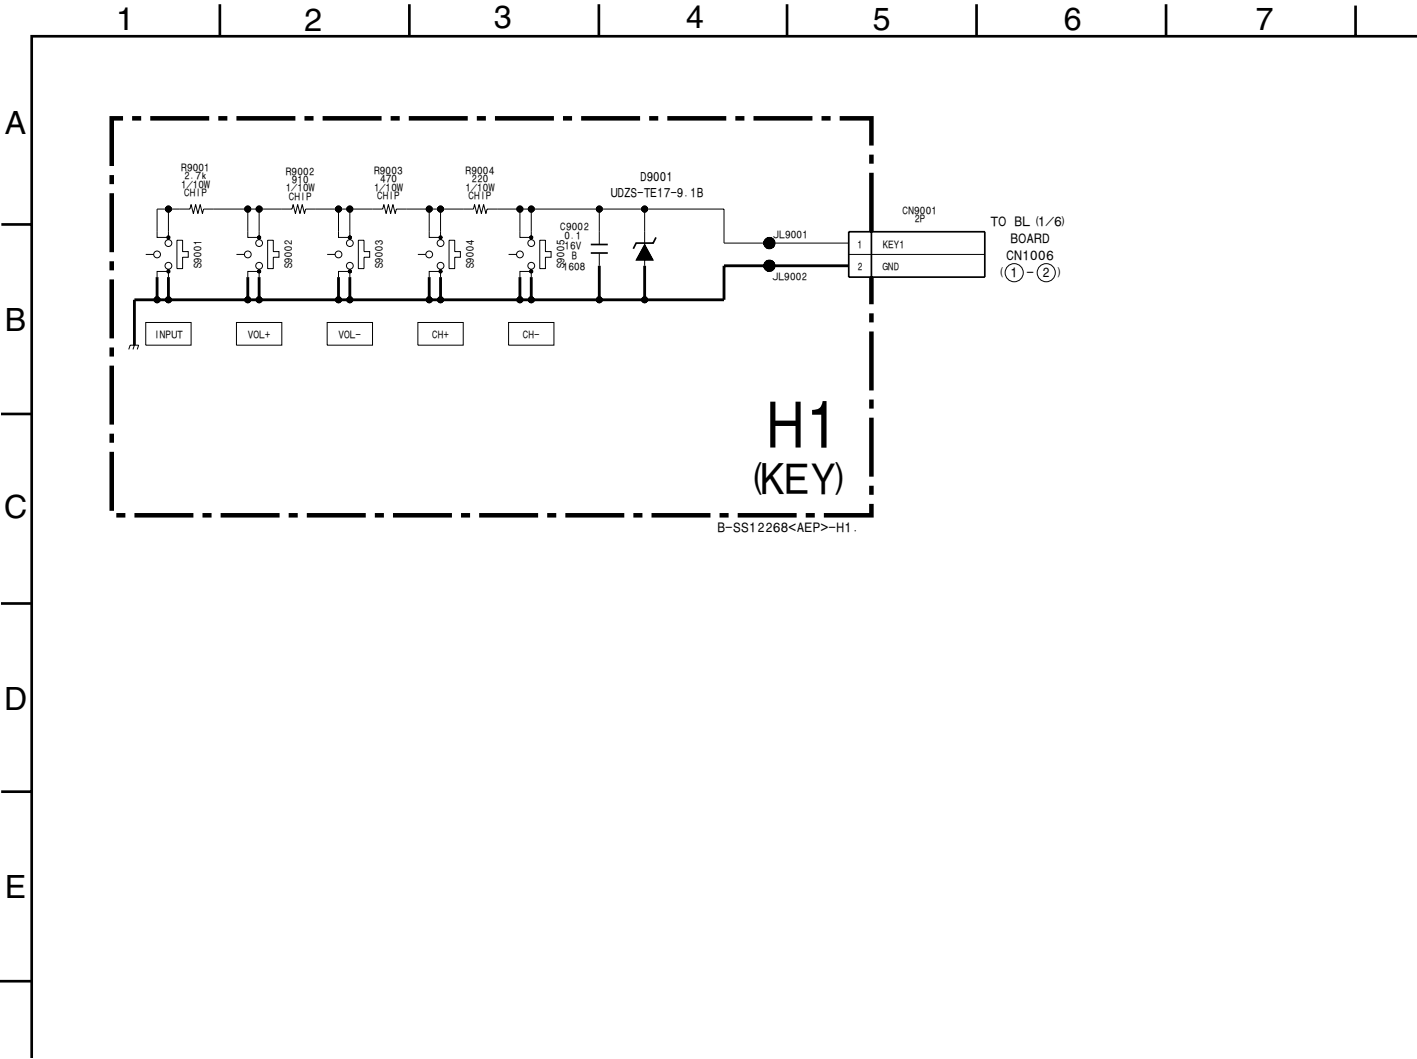


H1 [KEY]

— H1 BOARD —

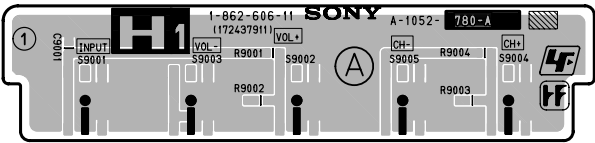

<COMPONENT SIDE>

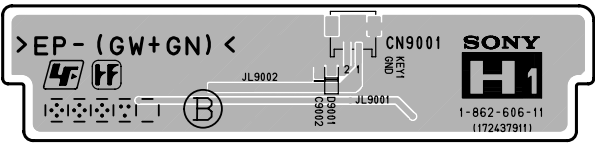


<CONDUCTOR SIDE>

• H1 BOARD SEMICONDUCTOR LOCATION


Ref.	*
D9001	③

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)

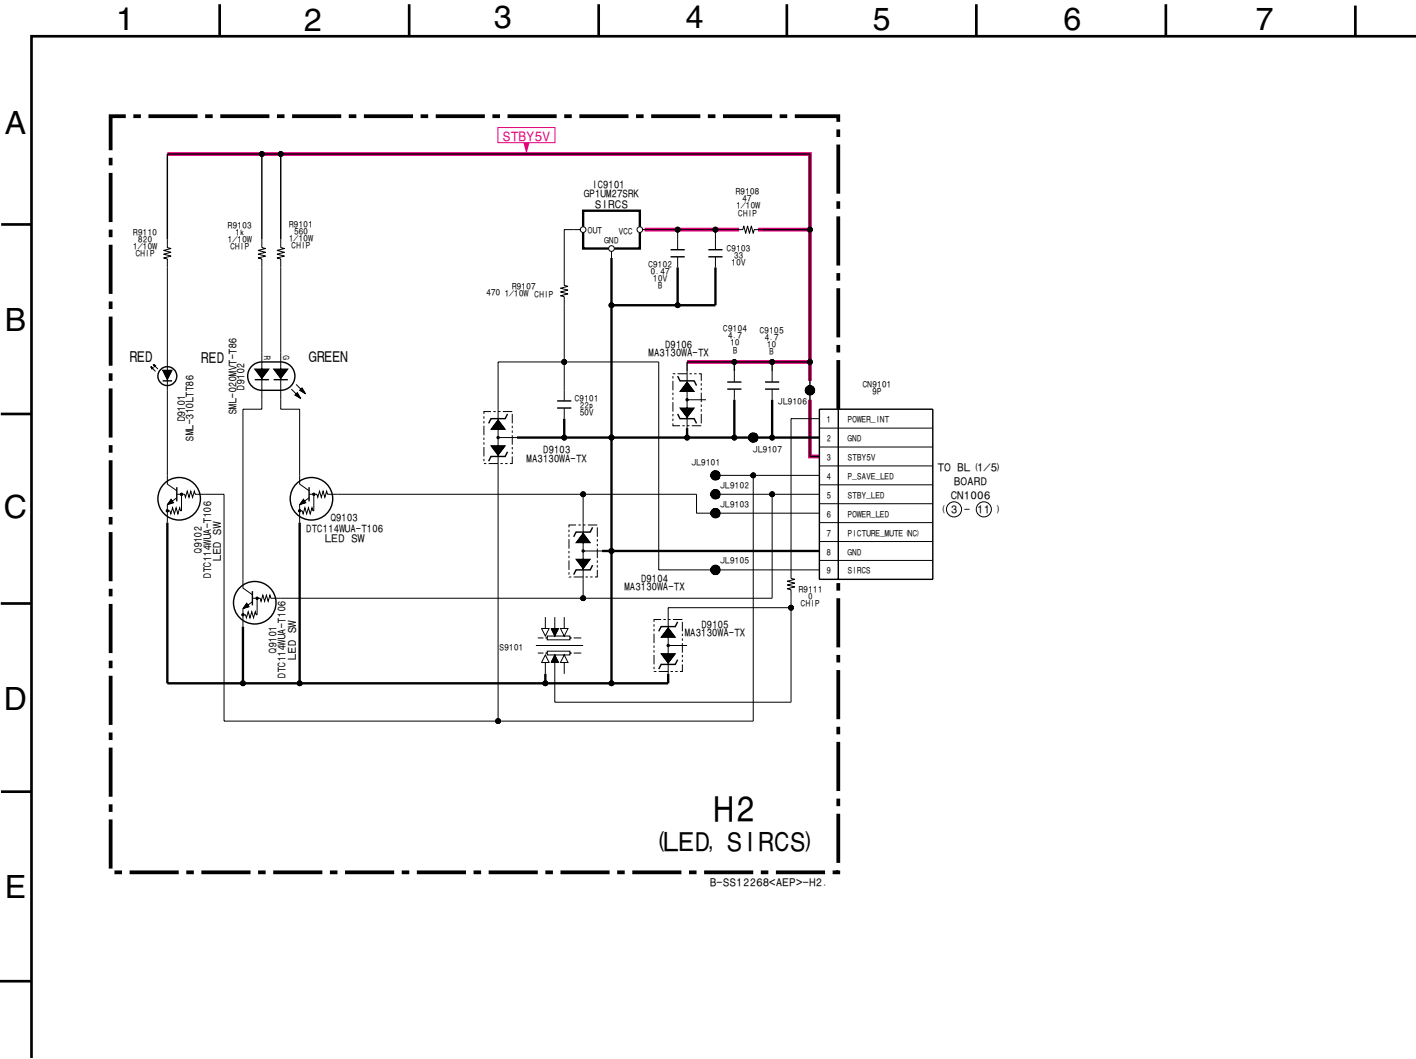


H2 [LED, SIRCS]

— H2 BOARD —

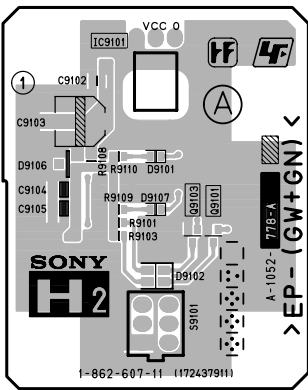

<COMPONENT SIDE>

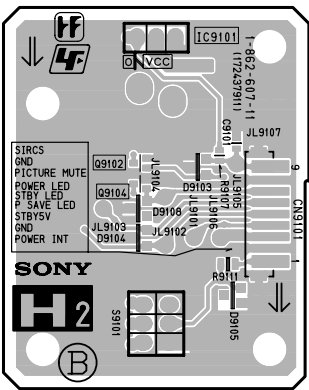

<CONDUCTOR SIDE>

• H2 BOARD SEMICONDUCTOR LOCATION

Ref.	*
Q9101-Q9103	②
D9101	③
D9102-D9106	③

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)


— H3 BOARD —




Ref.	*
D9201, D9204, D9206	③
D9207-D9209	⑪


*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)


(6) Schematic Diagrams of ULE Board

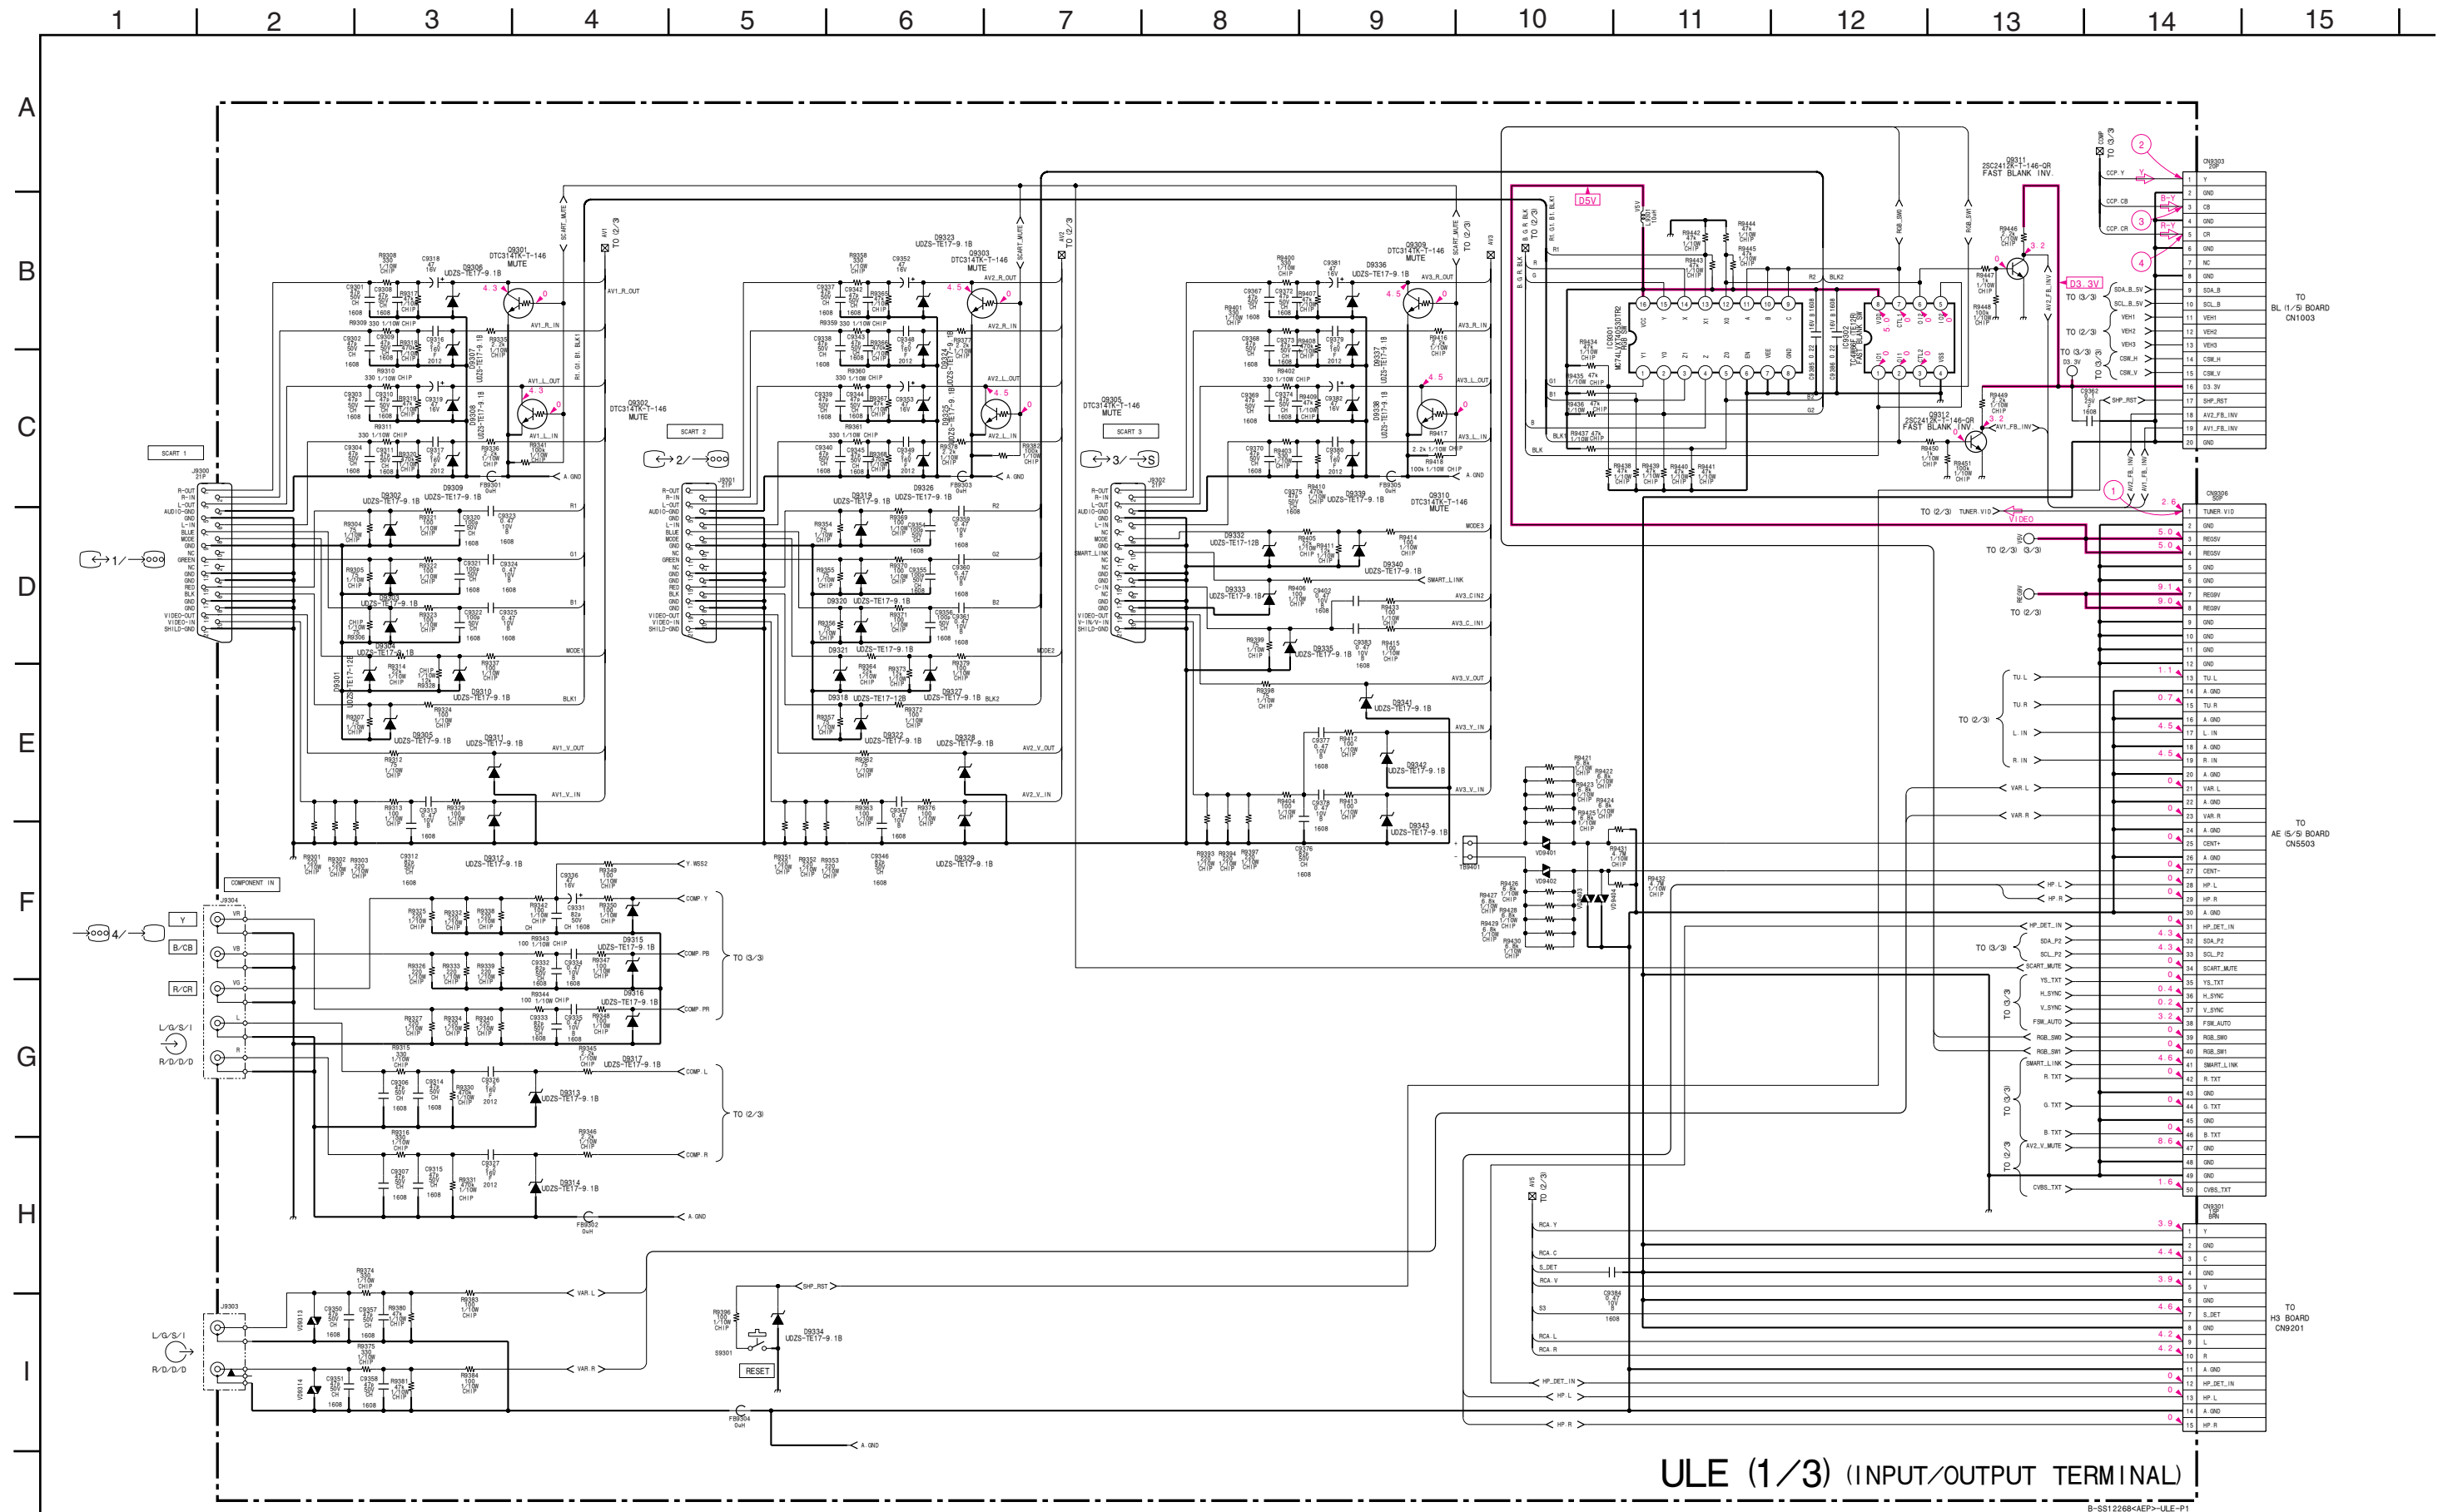

•ULE(1/3) BOARD WAVEFORMS

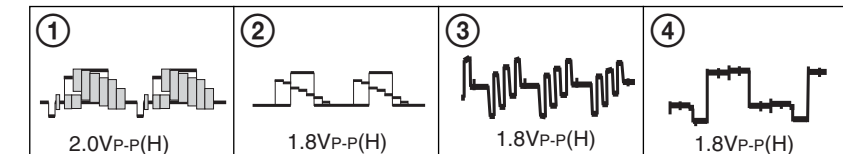




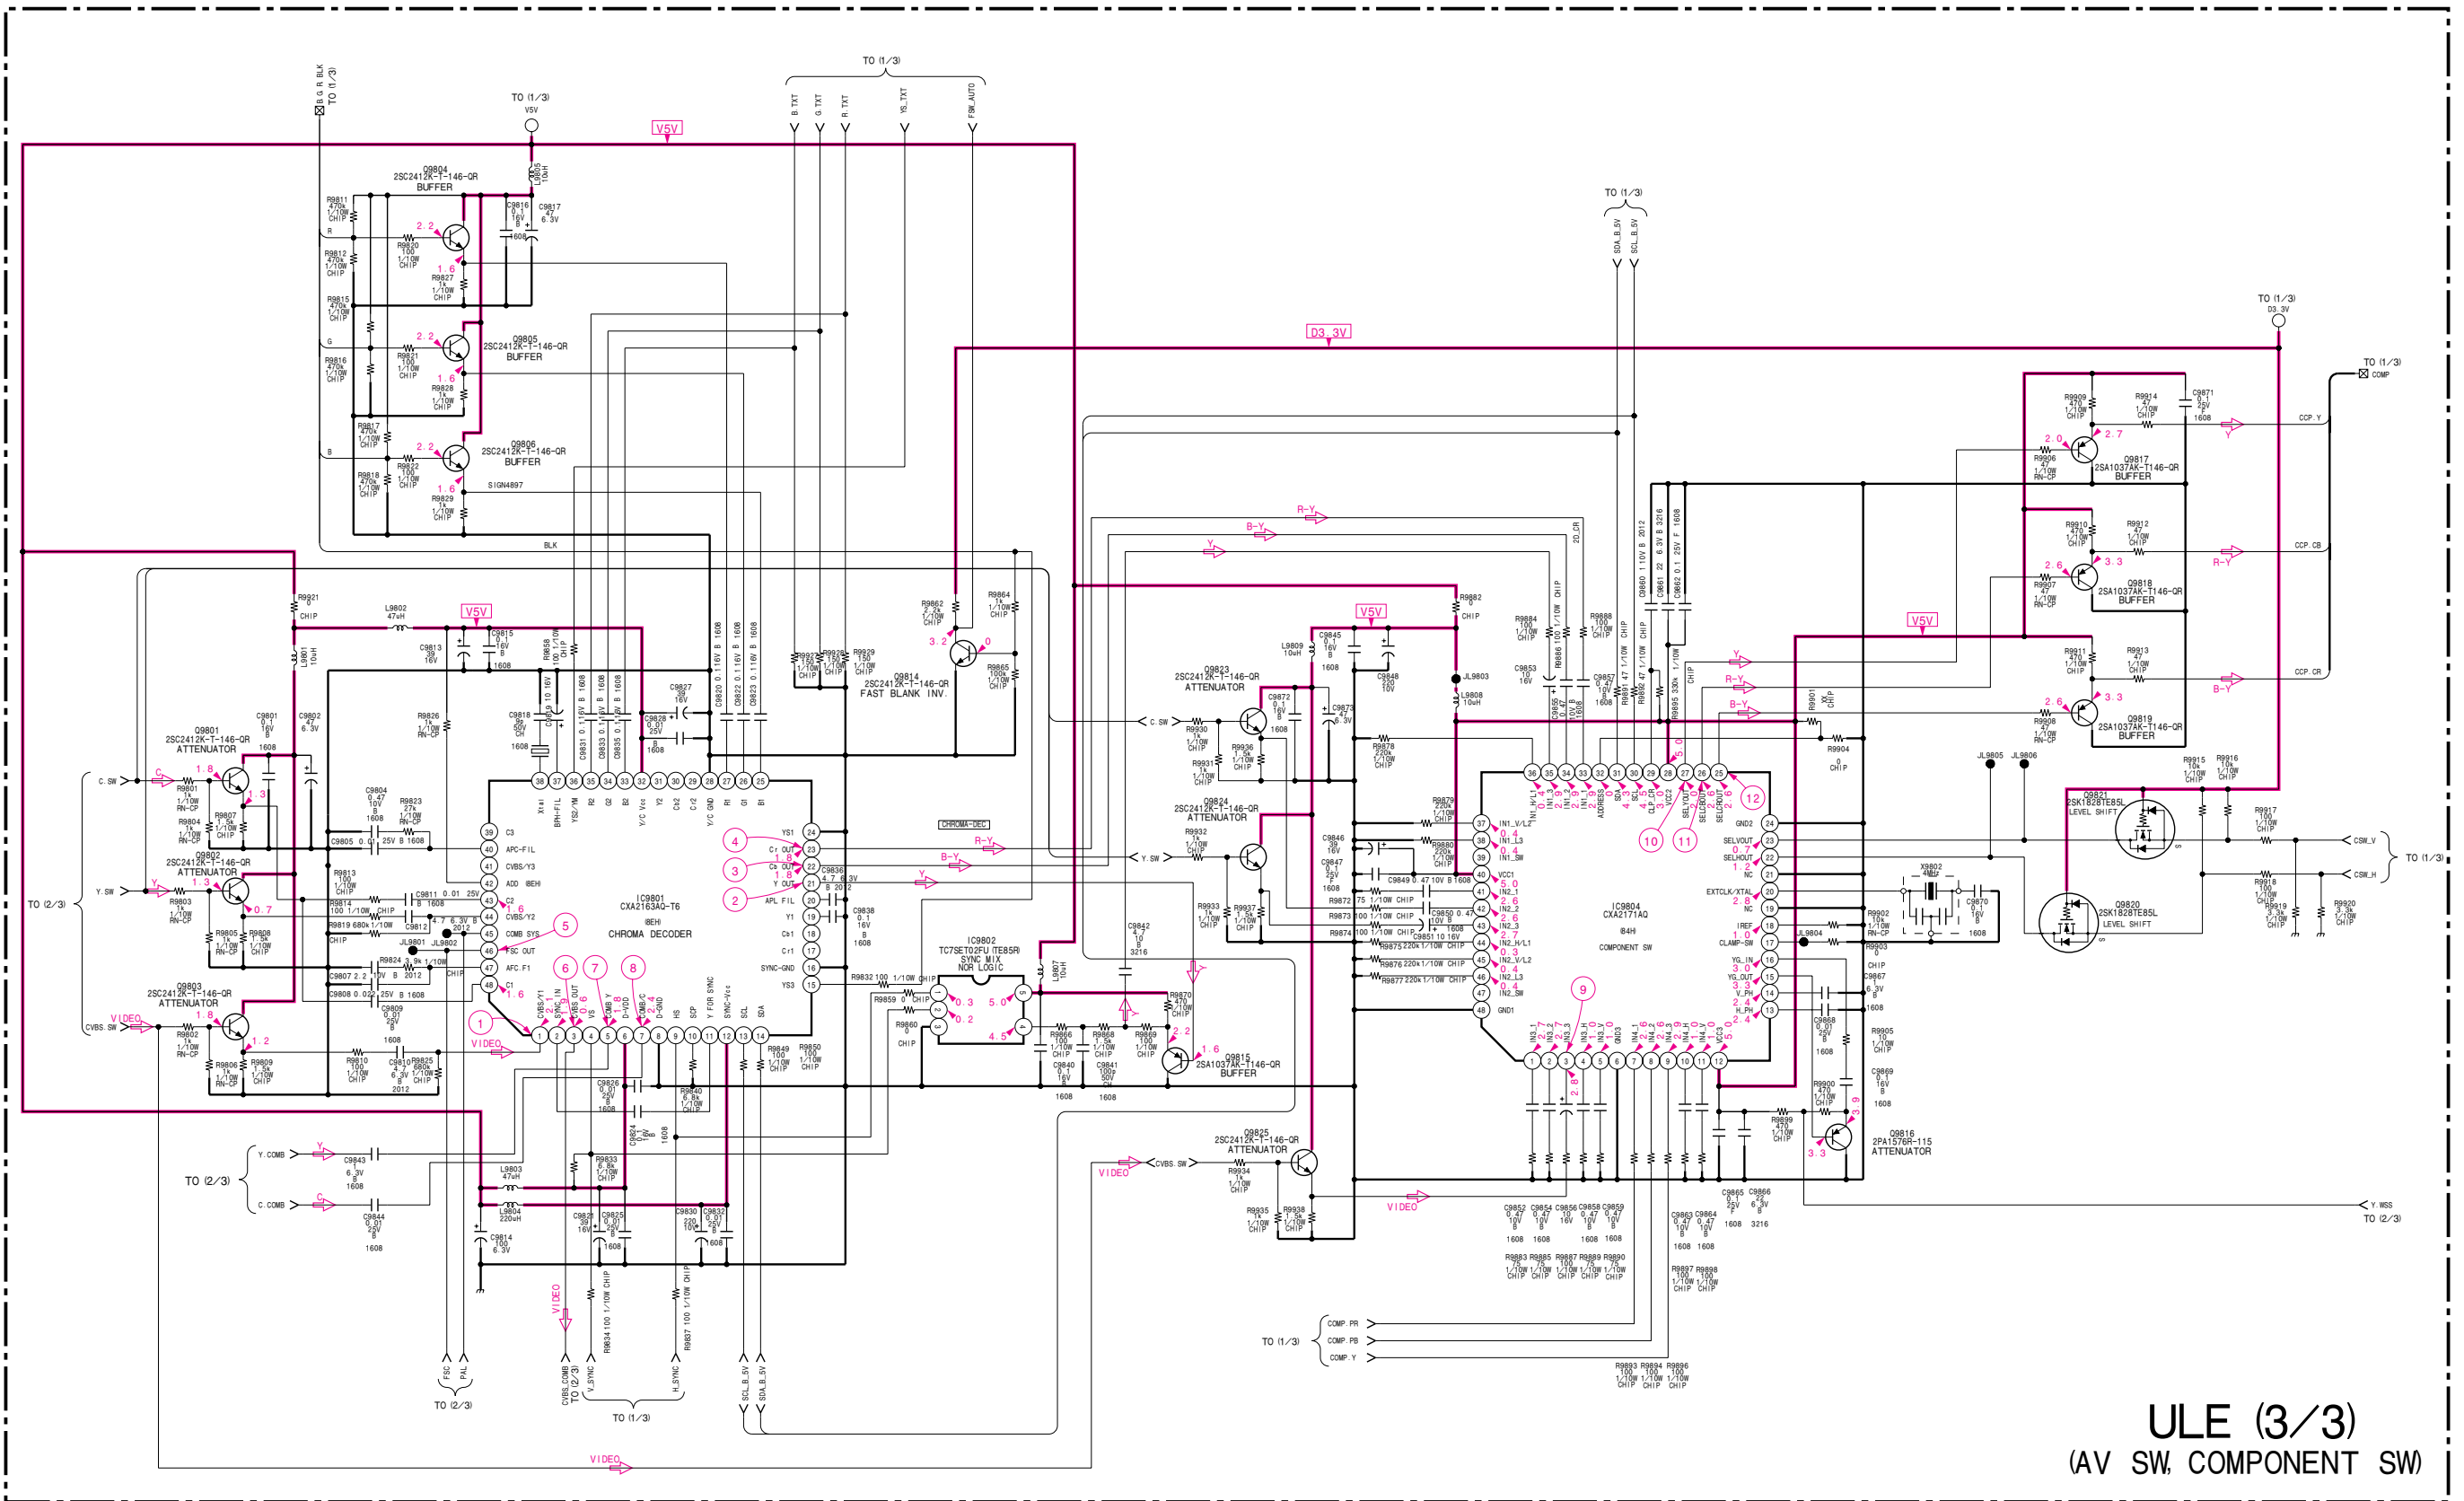


ULE (3/3)
(AV SW, COMPONENT SW)


B-SS12268<AEP>-ULE-P3

•ULE(3/3) BOARD WAVEFORMS

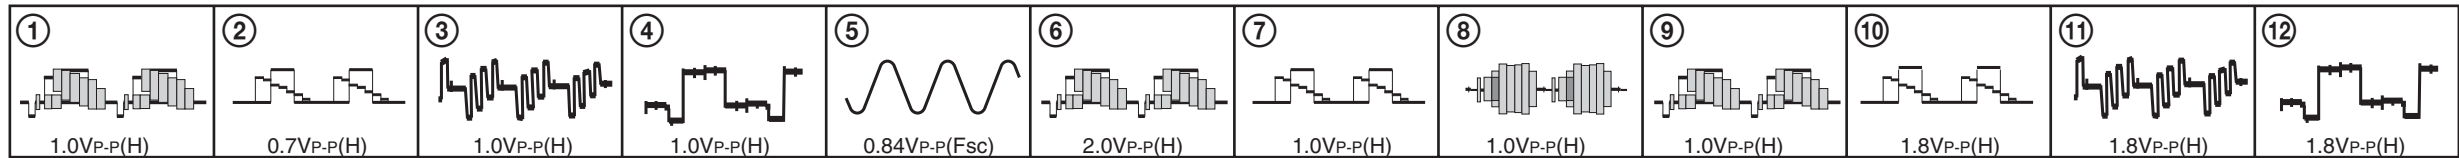

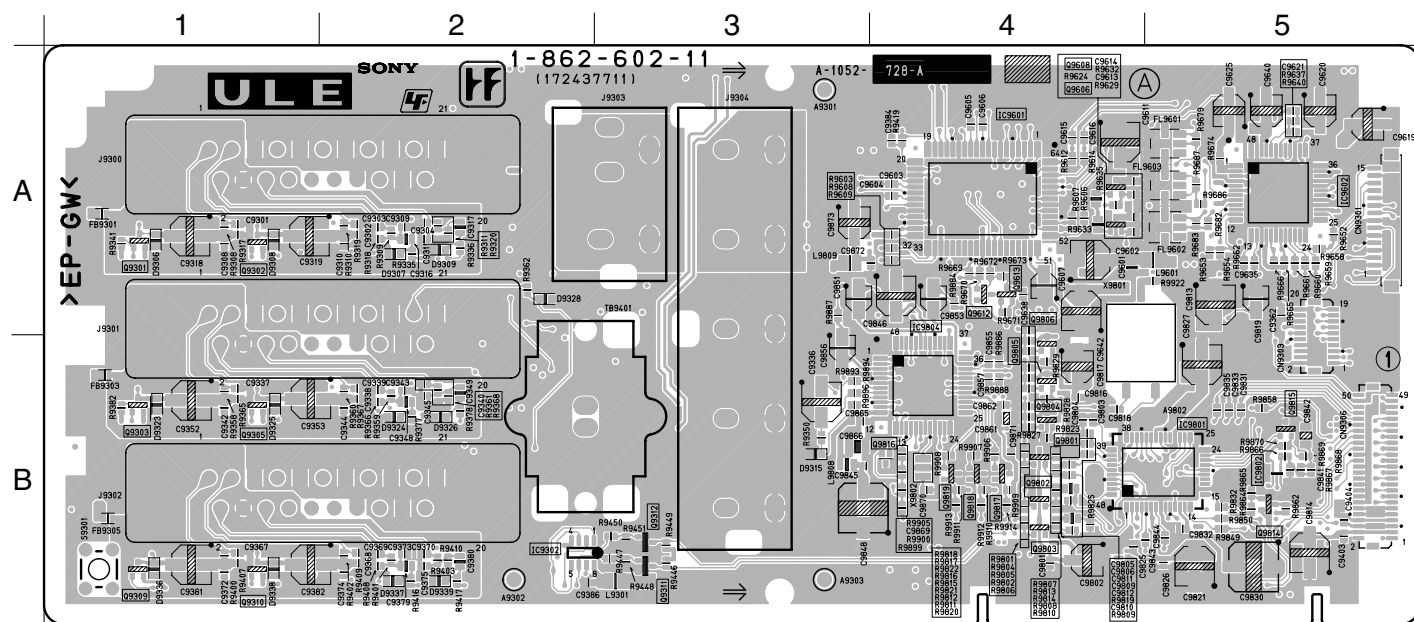

<COMPONENT SIDE>

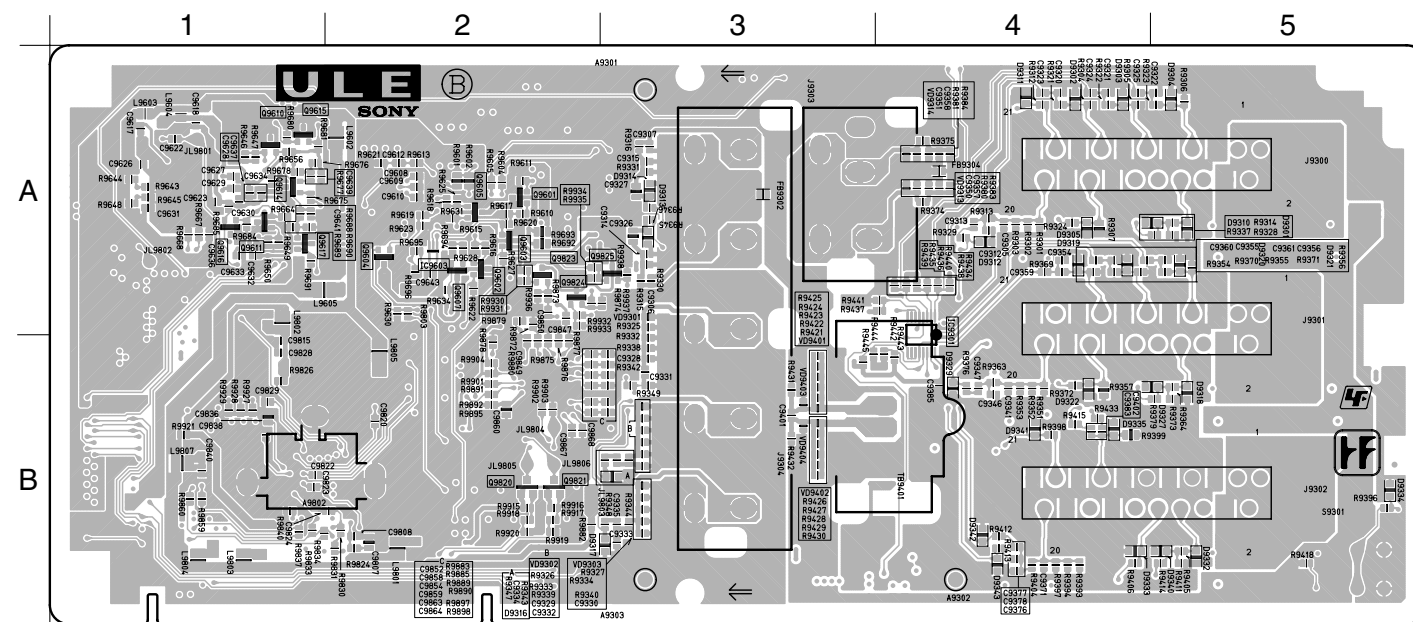

<CONDUCTOR SIDE>

• ULE BOARD SEMICONDUCTOR LOCATION


IC											
(Component Side) (Conductor Side)											
IC9301	B-2	Q9603	A-2	②	Q9820	B-2	⑬	D9317	B-3	③	
IC9302	B-2	Q9604	A-2	②	Q9821	B-2	⑬	D9318	A-5	③	
IC9601	A-4	Q9605	A-2	②	Q9823	A-2	②	D9319	A-4	③	
IC9602	A-5	Q9606	A-4	②	Q9824	A-2	②	D9320	A-4	③	
IC9603	A-2	Q9607	A-2	②	Q9825	A-3	②	D9321	A-4	③	
IC9801	B-5	Q9608	A-4	②	DIODE			D9322	B-4	③	
IC9802	B-5	Q9610	A-1	②				D9323	B-1	③	
IC9804	B-4	Q9611	A-1	②	(Component Side) (Conductor Side) *			D9324	B-2	③	
		Q9612	A-4	②				D9325	B-1	③	
		Q9613	A-4	②	D9301	A-5	③	D9326	B-2	③	
		Q9614	A-1	②	D9302	A-4	③	D9327	B-5	③	
		Q9615	A-1	②	D9303	A-4	③	D9328	A-2	③	
		Q9616	A-1	②	D9304	A-5	③	D9329	B-4	③	
		Q9617	A-1	②	D9305	A-4	③	D9332	B-5	③	
		Q9801	B-4	②	D9306	A-1	③	D9333	B-4	③	
		Q9802	B-4	②	D9307	A-2	③	D9334	B-5	③	
		Q9803	B-4	②	D9308	A-1	③	D9335	B-4	③	
		Q9804	B-4	②	D9309	A-2	③	D9336	B-1	③	
		Q9805	B-4	②	D9310	A-5	③	D9337	B-2	③	
		Q9806	B-4	②	D9311	A-4	③	D9338	B-1	③	
		Q9814	B-5	②	D9312	A-4	③	D9339	B-2	③	
		Q9815	B-5	②	D9313	A-3	③	D9340	B-5	③	
		Q9816	B-4	②	D9314	A-3	③	D9341	B-4	③	
		Q9817	B-4	②	D9315	B-3	③	D9342	B-4	③	
		Q9818	B-4	②	D9316	B-3	③	D9343	B-4	③	
		Q9819	B-4	②							

※: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)


3-5. SEMICONDUCTORS

IC


BA033FP-E2
S-80928CNMC-G8YT2G
TA75S393F-TE85R
TC7S66FU
TC7S66FU(TE85R)
TC7SET02FU(TE85R)
TC7SH04FU
TC7SH04FU-TE85R
TC7SH86FU-TE85R
TC7SZ125FU(TE85R)




BA05T




BA09ST-V5




BA25BC0FP-E2




BA3823LS




BD3869AF-E2




CXA2069Q
CXA2069Q-TL




CXA2163AQ-T6
CXA2171AQ
CXA2171AQ-T6




CXD2097BQ
CXD9756R




CXD3802BQ




HY57V161610ETP-7DR
MSM56V16160F-10TS-K
MSM56V16160F-8T3FM1




IS42S32200B-6TL-TR
MT48LC2M32B2P-6-Y14W




K6F2008V2E-LF70000




LM393DT (A)
LM75CIMX-3
LMH6658MMX/J5000172
M24C16-WMN6T(B)
M24C64-WMN6T(B)
NJM2521V(TE2)
NJM3414AV(TE2)
NJM4558V-TE2
TC4W66F(TE12R)




MCZ3001UB




MC74LVXT4053DTR2
TC4052BF(EL,N)




MM1431ATT




MM1561JFBE




MSP3411G-QA-B11




MX29LV800TTC-70G-268A




PQ070XZ01ZP




PQ1CZ41H2ZPH



PST573IMT




PW166B-10TL




256Pin PGA

SAA5665HL/M1D/0724




SN105233DBTR




30Pin SOP

SN74ALVCH16823DGGR
THC63LVDM83R-T



56Pin SOP

SN74LV132APWR
SN74LVC74APWR-12
TC74VHC08FT(EL)
TLC2933IPWR-12




14Pin SOP

STR-A6169



8Pin DIP

S-80822CNNB-B8HT2G
S-80829CNNB-B8OT2G



TL431CLP-Z




UPC1093J-1-T




TRANSISTOR


DTA143EUA-T106
DTC114EUA-T106
DTC114WUA-T106
DTC144EKA
DTC144EKA-T146
DTC314TK-T-146
MSD601-RT1
MUN2111T1
MUN2211T1
MUN5213T1
UN2111
UN2211
2PA1576R-115
2PC4081R-115
2SA1037AK-T146-QR
2SA1037AK-T146-R
2SA1226-E4
2SA1226-T1E3E4
2SC1623-L5L6
2SC2412K-T-146-QR
2SC4081-R
2SC4081T106R
2SC4178-F13F14-T1
2SC4178-F14




DTC114EU




HN1B01FU-TE85R




SI2301DS-T1
SI2304DS-T1
2SK1828
2SK1828TE85L



SSM6N15FU(TE85R)



UPA1716G-E2




DIODE


D10SC6M-4022




D4SB60L



EC21QS03L-TE12L
PTZ-TE25-3.9B
PTZ-TE25-5.6B
PTZ-TE25-6.8B
RB053L-30TE25




ERA22-08KFLB
UF4005PKG23
10ERB20-TB3




F10P04Q
FCH08A10




HN1D03FU-TE85R




MA111-TX
MMDL914T1
RD5.6SB-T1
UDZSTE-1712B
UDZSTE-1716B
UDZSTE-175.6B
UDZSTE-176.2B
UDZSTE-178.2B
UDZSTE-179.1B
UDZ-TE-17-8.2B




MA153-TX
1PS302
1SS226




MA3130WA-TX




MA3200WA-TX




MM3Z13VT1
MM3Z15VT1
MM3Z22VT1
MM3Z5V6ST1




RD15ESB2
RD15ES-T1B2



1PS184-115




SML-310LTT86




SECTION 4

EXPLODED VIEWS


NOTE:

The components identified  marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque  sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.


- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

4-1. CABINET ASSY AND STAND

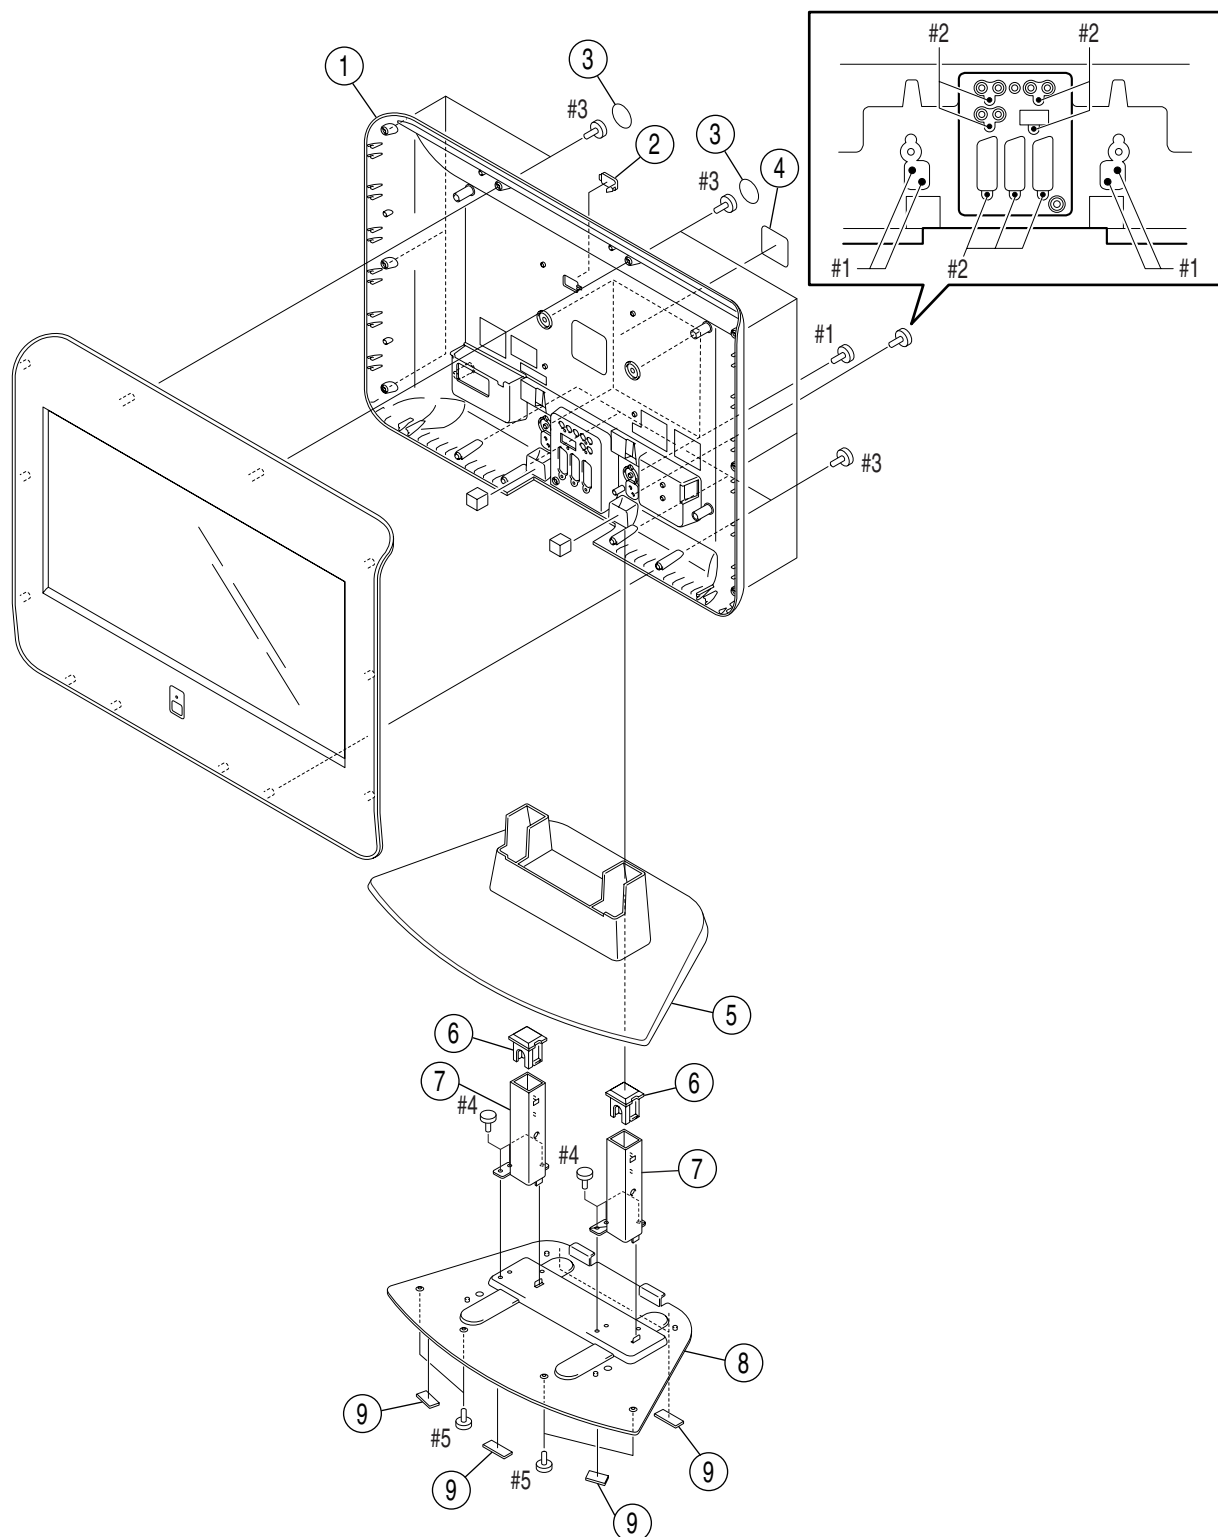

REF. No.	PART No.	DESCRIPTIONRE	MARK	REF. No.	PART No.	DESCRIPTIONRE	MARK
1	X-2021-448-1	REAR CABINET ASSY (Black)		#1	7-682-973-49	SCREW +PSW 5X16	
	X-2021-449-1	REAR CABINET ASSY (Silver)		#2	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	
2	4-094-922-31	COVER, ECS (15V) (Black)		#3	7-685-663-79	SCREW +BVTP 4X16 TYPE2 IT-3	
	4-094-922-41	COVER, ECS (15V) (Silver)		#4	7-682-973-19	SCREW +PSW 5X10	
3	2-024-263-01	COVER, SCREW (Black)		#5	7-685-659-71	SCREW +BVTP 4X8 TYPE2 IT-3	
	2-024-263-11	COVER, SCREW (Silver)					
4	* 2-024-113-01	MODEL NAME PLATE					
5	2-024-336-01	STAND COVER					
6	4-098-263-01	CAP (42), STAND					
7	2-024-338-01	STAND ARM					
8	2-024-337-01	STAND BASE					
9	2-021-805-01	FOOT					


4-2. CHASSIS-1

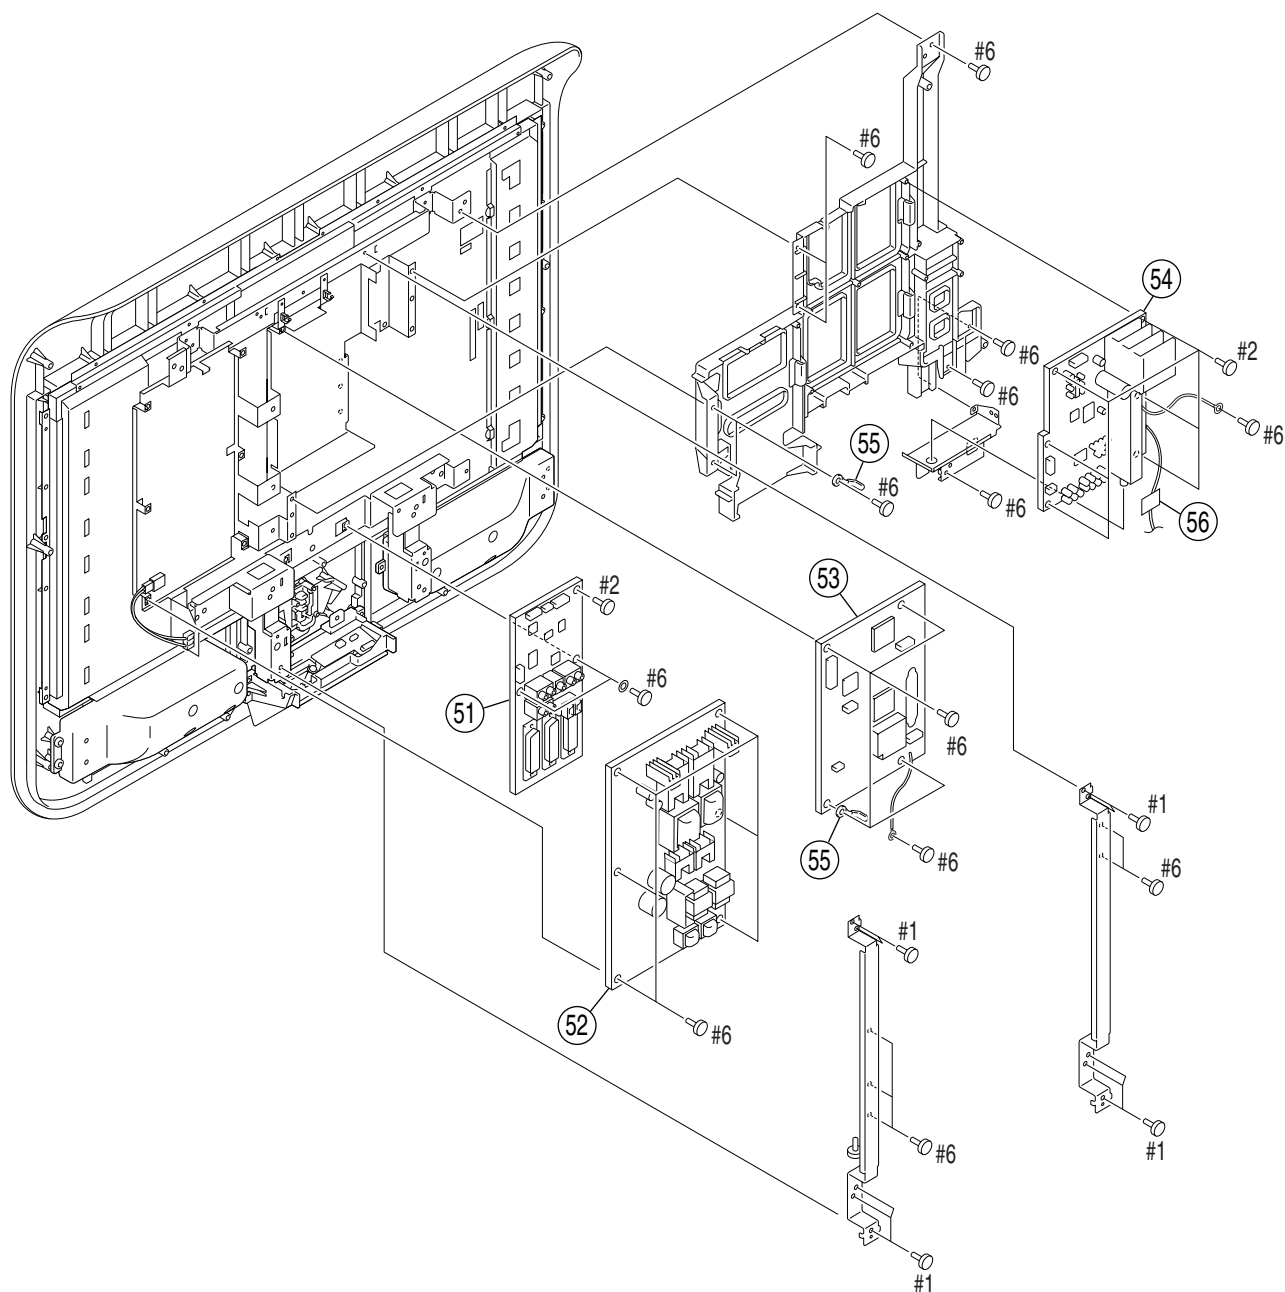

REF. No.	PART No.	DESCRIPTIONRE	MARK
51	* A-1052-728-A	ULE MOUNT	
52	* A-1052-730-A	GL MOUNT	
53	* A-1052-729-A	BL MOUNT	
54	* A-1052-727-A	AE MOUNT	
55	* 4-662-796-01	CLIP, COACHING	

REF. No.	PART No.	DESCRIPTIONRE	MARK
56	* 4-092-814-01	CUSHION D	
#1	7-682-973-49	SCREW +PSW 5X16	
#2	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	
#6	7-685-872-09	SCREW +BVTT 3X8 (S)	


4-3. CHASSIS-2

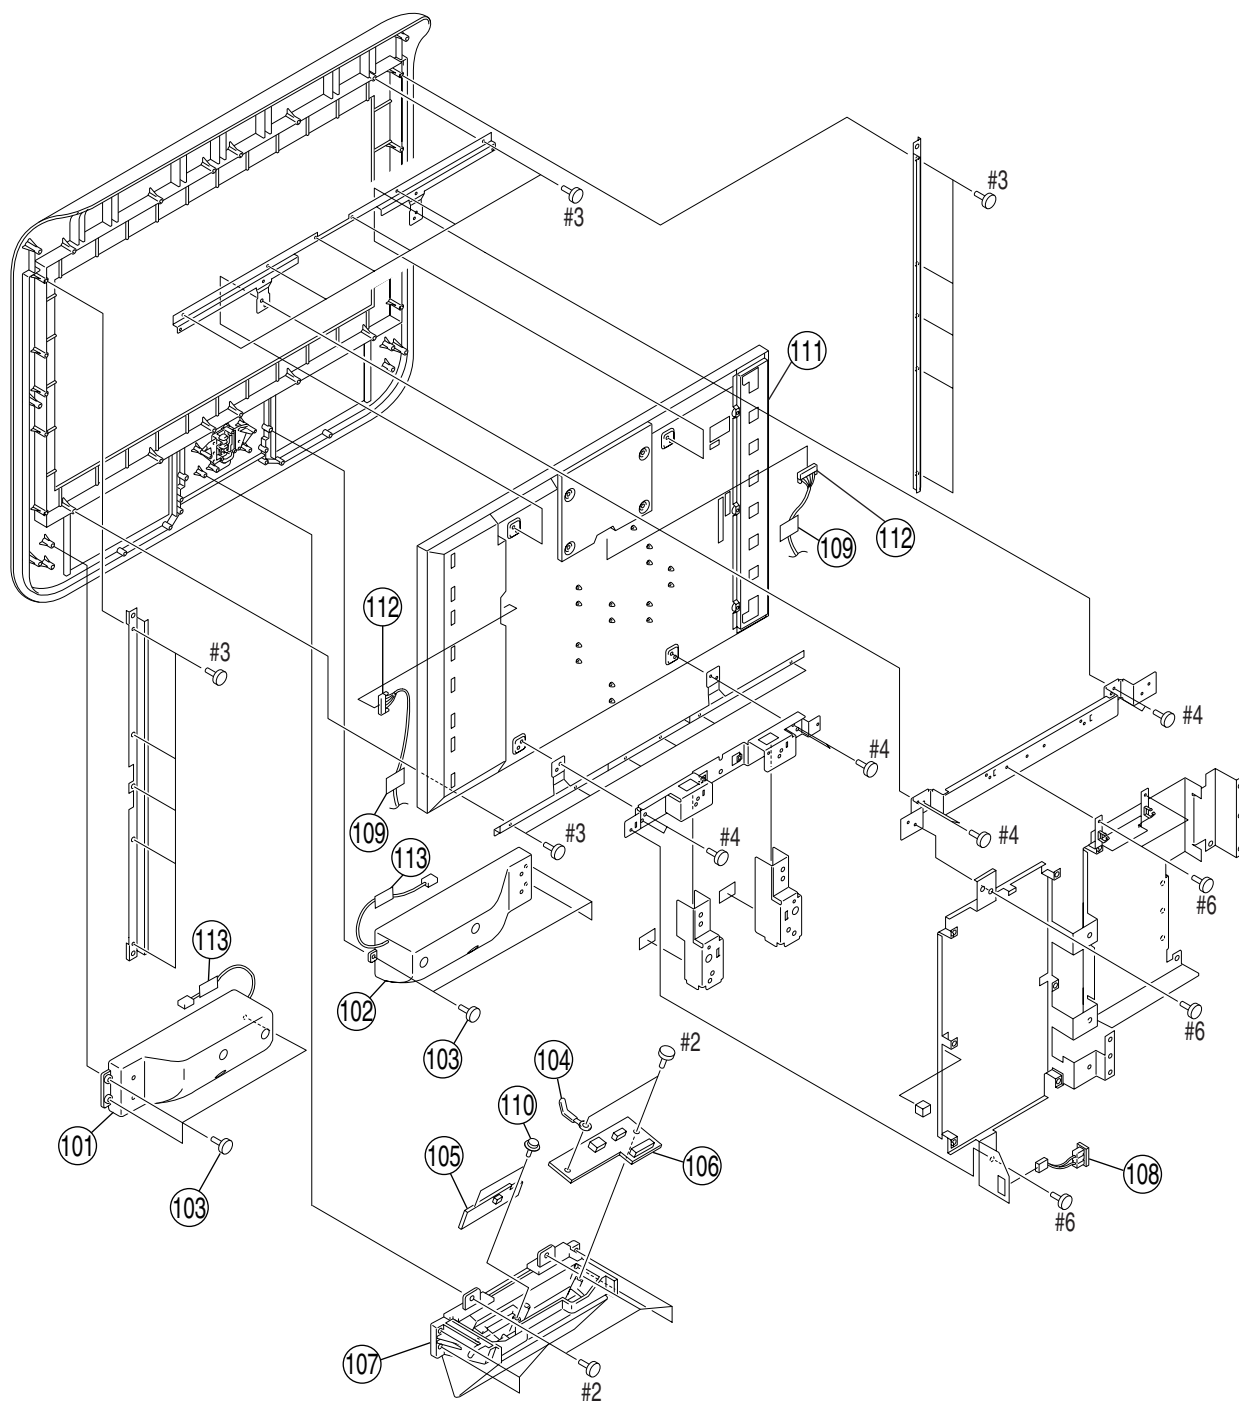

REF. No.	PART No.	DESCRIPTIONRE	MARK
101	1-825-877-11	LOUDSPEAKER	
102	1-825-876-11	LOUDSPEAKER	
103	4-302-404-03	SCREW (WASHER HEAD) (+P 4X16)	
104	* 4-662-796-01	CLIP, COACHING	
105	* A-1052-780-A	H1 MOUNT	
106	* A-1052-781-A	H3 MOUNT	
107	X-2021-445-1	FRONT TERMINAL ASSY (Black)	
	X-2021-727-1	FRONT TERMINAL ASSY (Silver)	
108	1-540-054-11	INLET, AC	
109	* 4-092-814-02	CUSHION D	
110	4-029-432-11	BV WHTP 3X12	

REF. No.	PART No.	DESCRIPTIONRE	MARK
111	1-805-640-11	LCD PANEL	
112	1-829-352-11	LEAD WIR, E WITH CONNECTOR (LVDS)	
113	2-109-183-01	CUSHION, SP CABLE	
#2	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	
#3	7-685-663-79	SCREW +BVTP 4X16 TYPE2 IT-3	
#4	7-682-973-19	SCREW +PSW 5X10	
#6	7-685-872-09	SCREW +BVTT 3X8 (S)	


4-4. BEZEL ASSY

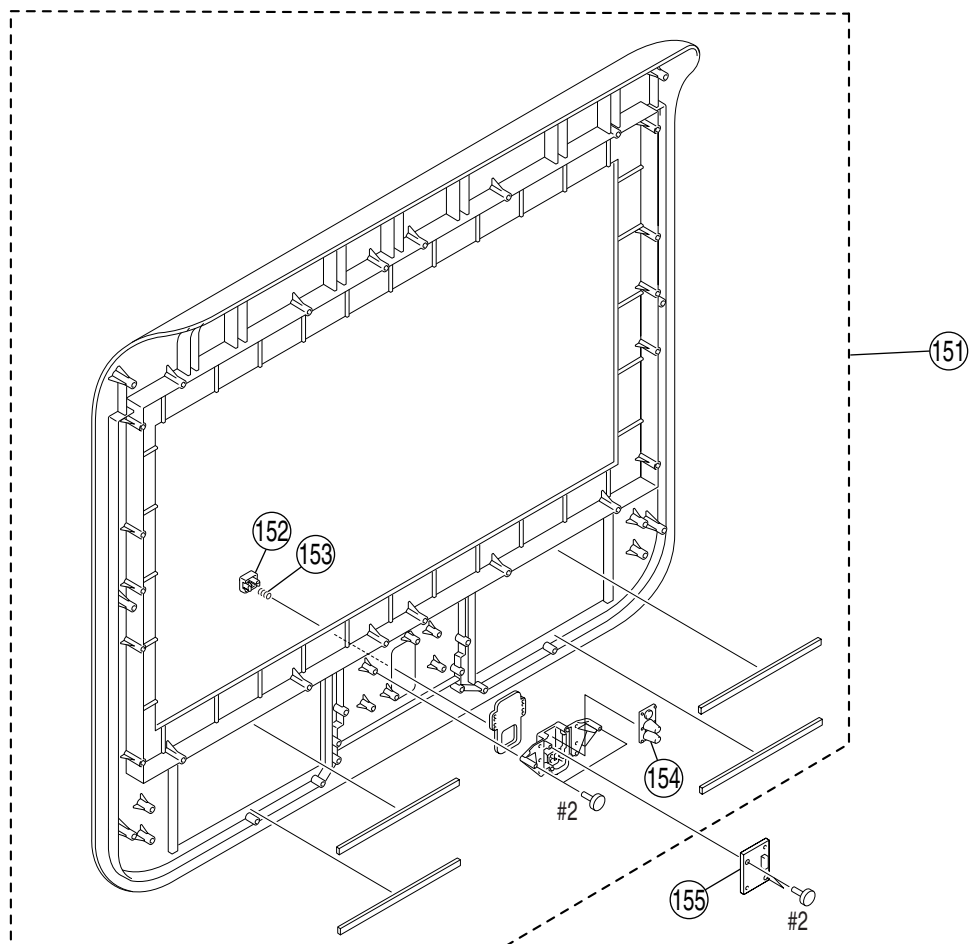

REF. No.	PART No.	DESCRIPTIONRE	MARK
151	X-2021-446-1	BEZEL ASSY (Black)	152-154
	X-2021-447-1	BEZEL ASSY (Silver)	152-154
152	2-021-791-12	BUTTON, POWER (Black)	
	2-021-791-02	BUTTON, POWER (Silver)	
153	2-109-058-01	SPRING, COMPRESSION	

REF. No.	PART No.	DESCRIPTIONRE	MARK
154	2-050-241-01	GUIDE, LED	
155	* A-1055-538-A	H2 MOUNT	
#2	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	

4-5. PACKING MATERIALS

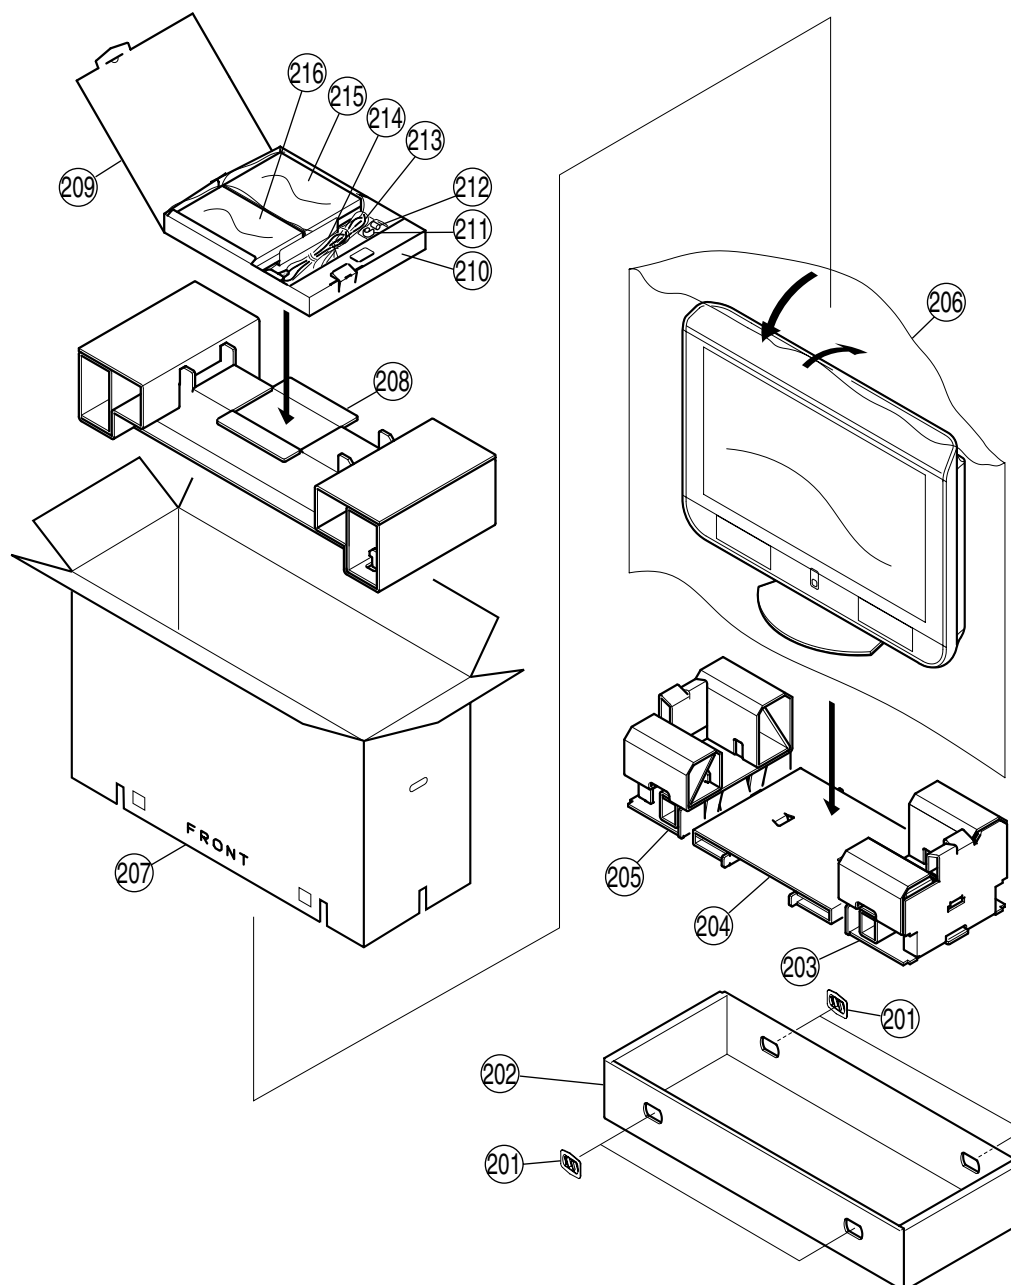

REF. No.	PART No.	DESCRIPTIONRE	MARK
201	* 3-674-673-01	STOPPER (A)	
202	* 2-050-342-01	TRAY	
203	* X-2021-684-1	CUSHION LOWER RIGHT ASSY	
204	* 2-050-349-01	CUSHION (CENTER LOWER)	
205	* X-2021-685-1	CUSHION LOWER LEFT ASSY	
206	* 2-148-373-01	BAG, PROTECTION	
207	* 2-050-341-02	INDIVIDUAL CARTON (Black)	
	* 2-103-648-02	INDIVIDUAL CARTON (Silver)	
208	* X-2021-682-1	CUSHION UPPER ASSY	
209	* 2-148-886-01	BOX, ACCESSORY	
210	1-478-209-11	STANDARD TYPE COMMANDER (RM-Y1102)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
211	4-099-720-01	HOOK	
212	1-500-824-11	FERRITE CORE	
213	1-769-175-21	CABLE, ANTENNA (WITH FILTER)	
214	⚠ 1-827-479-11	POWER-SUPPLY CORD	
	⚠ 1-827-482-11	POWER-SUPPLY CORD	
215	2-021-809-11	MANUAL INSTRUCTION (DE/FR/GB/NL)	
	2-021-809-21	MANUAL INSTRUCTION (ES/IT/PT)	
	2-021-809-31	MANUAL INSTRUCTION (DK/FI/SE)	
	2-021-809-43	MANUAL INSTRUCTION (RU/PL)	
216	2-021-808-01	SCHEMATIC DIAGRAM	

SECTION 6

ELECTRICAL PARTS LIST

NOTE:

The components identified \triangle marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque \triangle sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

RESISTORS

- All resistors are in ohms
- F : nonflammable

No.	#	Board	Type	$\Delta/\%$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1		AE	CAPACITOR		C5538	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
2		AE	CAPACITOR		C5539	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
3		AE	CAPACITOR		C6000	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
4		AE	CAPACITOR		C6001	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
5		AE	CAPACITOR		C6002	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
6		AE	CAPACITOR		C6003	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
7		AE	CAPACITOR		C6005	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
8		AE	CAPACITOR		C6006	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
9		AE	CAPACITOR		C6007	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
10		AE	CAPACITOR		C6008	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
11		AE	CAPACITOR		C6009	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
12		AE	CAPACITOR		C6010	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
13		AE	CAPACITOR		C6011	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
14		AE	CAPACITOR		C6012	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
15		AE	CAPACITOR		C6013	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
16		AE	CAPACITOR		C6014	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
17		AE	CAPACITOR		C6015	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
18		AE	CAPACITOR		C6016	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
19		AE	CAPACITOR		C6017	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
20		AE	CAPACITOR		C6018	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
21		AE	CAPACITOR		C6019	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
22		AE	CAPACITOR		C6020	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
23		AE	CAPACITOR		C6100	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
24		AE	CAPACITOR		C6101	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
25		AE	CAPACITOR		C6102	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
26		AE	CAPACITOR		C6103	1-162-928-11	CERAMIC CHIP 120PF 5.00% 50V		
27		AE	CAPACITOR		C6106	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
28		AE	CAPACITOR		C6107	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
29		AE	CAPACITOR		C6108	1-162-924-11	CERAMIC CHIP 56PF 5.00% 50V		
30		AE	CAPACITOR		C6109	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
31		AE	CAPACITOR		C6110	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
32		AE	CAPACITOR		C6111	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
33		AE	CAPACITOR		C6112	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
34		AE	CAPACITOR		C6114	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
35		AE	CAPACITOR		C6115	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
36		AE	CAPACITOR		C6116	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
37		AE	CAPACITOR		C6117	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
38		AE	CAPACITOR		C6118	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
39		AE	CAPACITOR		C6121	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
40		AE	CAPACITOR		C6122	1-162-915-11	CERAMIC CHIP 10PF 0.50PF 50V		
41		AE	CAPACITOR		C6123	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
42		AE	CAPACITOR		C6124	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
43		AE	CAPACITOR		C6125	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
44		AE	CAPACITOR		C6126	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
45		AE	CAPACITOR		C6127	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
46		AE	CAPACITOR		C6128	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
47		AE	CAPACITOR		C6129	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
48		AE	CAPACITOR		C6130	1-126-193-11	ELECT CHIP 1UF 20.00% 50V		
49		AE	CAPACITOR		C6131	1-164-346-11	CERAMIC CHIP 1UF 16V		
50		AE	CAPACITOR		C6132	1-164-346-11	CERAMIC CHIP 1UF 16V		
51		AE	CAPACITOR		C6133	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
52		AE	CAPACITOR		C6134	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
53		AE	CAPACITOR		C6135	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
54		AE	CAPACITOR		C6136	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
55		AE	CAPACITOR		C6137	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
56		AE	CAPACITOR		C6138	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
57		AE	CAPACITOR		C6139	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
58		AE	CAPACITOR		C6140	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
59		AE	CAPACITOR		C6141	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
60		AE	CAPACITOR		C6142	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
61		AE	CAPACITOR		C6143	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
62		AE	CAPACITOR		C6144	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
63		AE	CAPACITOR		C6145	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
64		AE	CAPACITOR		C6146	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
65		AE	CAPACITOR		C6147	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
66		AE	CAPACITOR		C6148	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
67		AE	CAPACITOR		C6149	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
68		AE	CAPACITOR		C6150	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
69		AE	CAPACITOR		C6151	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
70		AE	CAPACITOR		C6152	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
71		AE	CAPACITOR		C6153	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
72		AE	CAPACITOR		C6154	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
73		AE	CAPACITOR		C6300	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
74		AE	CAPACITOR		C6301	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
75		AE	CAPACITOR		C6302	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
76		AE	CAPACITOR		C6303	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
77		AE	CAPACITOR		C6304	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
78		AE	CAPACITOR		C6305	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
79		AE	CAPACITOR		C6306	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
80		AE	CAPACITOR		C6307	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
81		AE	CAPACITOR		C6308	1-115-412-11	CERAMIC CHIP 680PF 5.00% 25V		
82		AE	CAPACITOR		C6309	1-115-412-11	CERAMIC CHIP 680PF 5.00% 25V		
83		AE	CAPACITOR		C6310	1-115-412-11	CERAMIC CHIP 680PF 5.00% 25V		
84		AE	CAPACITOR		C6311	1-115-412-11	CERAMIC CHIP 680PF 5.00% 25V		
85		AE	CAPACITOR		C6312	1-164-172-11	CERAMIC CHIP 0.0056UF 10.00% 25V		
86		AE	CAPACITOR		C6313	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
87		AE	CAPACITOR		C6314	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
88		AE	CAPACITOR		C6315	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V		
89		AE	CAPACITOR		C6316	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
90		AE	CAPACITOR		C6317	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
91		AE	CAPACITOR		C6318	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
92		AE	CAPACITOR		C6319	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V		
93		AE	CAPACITOR		C6320	1-164-172-11	CERAMIC CHIP 0.0056UF 10.00% 25V		
94		AE	CAPACITOR		C6321	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
95		AE	CAPACITOR		C6322	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
96		AE	CAPACITOR		C6323	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
97		AE	CAPACITOR		C6324	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
98		AE	CAPACITOR		C6325	1-164-677-11	CERAMIC CHIP 0.033UF 10.00% 16V		
99		AE	CAPACITOR		C6326	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
100		AE	CAPACITOR		C6327	1-164-677-11	CERAMIC CHIP 0.033UF 10.00% 16V		
101		AE	CAPACITOR		C6328	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
102		AE	CAPACITOR		C6329	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
103		AE	CAPACITOR		C6330	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
104		AE	CAPACITOR		C6331	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
105		AE	CAPACITOR		C6332	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
106		AE	CAPACITOR		C6333	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
107		AE	CAPACITOR		C6334	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
108		AE	CAPACITOR		C6335	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
109		AE	CAPACITOR		C6336	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
110		AE	CAPACITOR		C6337	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
111		AE	CAPACITOR		C6338	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
112		AE	CAPACITOR		C6339	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
113		AE	CAPACITOR		C6340	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
114		AE	CAPACITOR		C6341	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
115		AE	CAPACITOR		C6342	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
116		AE	CAPACITOR		C6343	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
117		AE	CAPACITOR		C6500	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
118		AE	CAPACITOR		C6501	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
119		AE	CAPACITOR		C6502	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
120		AE	CAPACITOR		C6503	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
121		AE	CAPACITOR		C6504	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
122		AE	CAPACITOR		C6505	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
123		AE	CAPACITOR		C6506	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
124		AE	CAPACITOR		C6507	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
125		AE	CAPACITOR		C6508	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
126		AE	CAPACITOR		C6509	1-100-633-21	ELECT CHIP 47UF 20% 35V		
127		AE	CAPACITOR		C6510	1-100-633-21	ELECT CHIP 47UF 20% 35V		
128		AE	CAPACITOR		C6511	1-100-633-21	ELECT CHIP 47UF 20% 35V		
129		AE	CAPACITOR		C6512	1-100-633-21	ELECT CHIP 47UF 20% 35V		
130		AE	CAPACITOR		C6513	1-117-713-21	ELECT CHIP 100UF 20.00% 50V		
131		AE	CAPACITOR		C6514	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
132		AE	CAPACITOR		C6515	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
133		AE	CAPACITOR		C6516	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
134		AE	CAPACITOR		C6517	1-100-701-11	ELECT 5600UF 20% 50V		
135		AE	CAPACITOR		C6519	1-165-753-21	ELECT 820UF 20% 50V		
136		AE	CAPACITOR		C6520	1-165-753-21	ELECT 820UF 20% 50V		
137		AE	CAPACITOR		C6600	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
138		AE	CAPACITOR		C6601	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
139		AE	CAPACITOR		C6602	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
140		AE	CAPACITOR		C6603	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
141		AE	CAPACITOR		C6605	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
142		AE	CAPACITOR		C6607	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
143		AE	CAPACITOR		C6608	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
144		AE	CAPACITOR		C6609	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
145		AE	CAPACITOR		C6610	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
146		AE	CAPACITOR		C6611	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
147		AE	CAPACITOR		C6612	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
148		AE	CAPACITOR		C6613	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		

No.	#	Board	Type	$\Delta/\%$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
149		AE	CAPACITOR		C6614	1-137-894-21	ELECT CHIP 470UF 20% 25V		
150		AE	CAPACITOR		C6615	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
151		AE	CAPACITOR		C6616	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
152		AE	CAPACITOR		C6617	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
153		AE	CAPACITOR		C6618	1-126-405-11	ELECT CHIP 10UF 20.00% 50V		
154		AE	CAPACITOR		C6619	1-126-405-11	ELECT CHIP 10UF 20.00% 50V		
155		AE	CAPACITOR		C6620	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
156		AE	CAPACITOR		C6621	1-126-405-11	ELECT CHIP 10UF 20.00% 50V		
157		AE	CAPACITOR		C6622	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
158		AE	CAPACITOR		C6623	1-126-405-11	ELECT CHIP 10UF 20.00% 50V		
159		AE	CAPACITOR		C6624	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
160		AE	CAPACITOR		C6625	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
161		AE	CAPACITOR		C6626	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
162		AE	CAPACITOR		C6627	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
163		AE	CAPACITOR		C6700	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
164		AE	CAPACITOR		C6701	1-165-585-21	ELECT CHIP 47UF 20% 25V		
165		AE	CAPACITOR		C6702	1-128-528-11	ELECT 470UF 20.00% 25V		
166		AE	CAPACITOR		C6800	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
167		AE	CAPACITOR		C6801	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
168		AE	CAPACITOR		C7001	1-128-528-11	ELECT 470UF 20.00% 25V		
169		AE	CAPACITOR		C7002	1-100-118-21	ELECT CHIP 82UF 20% 16V		
170		AE	CAPACITOR		C7003	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
171		AE	CAPACITOR		C7004	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
172		AE	CAPACITOR		C7005	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
173		AE	CAPACITOR		C7006	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
174		AE	CAPACITOR		C7007	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
175		AE	CAPACITOR		C7008	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
176		AE	CAPACITOR		C7009	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
177		AE	CAPACITOR		C7010	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
178		AE	CAPACITOR		C7011	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
179		AE	CAPACITOR		C7012	1-162-969-11	CERAMIC CHIP 0.0068UF 10.00% 25V		
180		AE	CAPACITOR		C7013	1-162-969-11	CERAMIC CHIP 0.0068UF 10.00% 25V		
181		AE	CAPACITOR		C7014	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
182		AE	CAPACITOR		C7015	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
183		AE	CAPACITOR		C7016	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
184		AE	CAPACITOR		C7017	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
185		AE	CAPACITOR		C7018	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
186		AE	CAPACITOR		C7019	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
187		AE	CAPACITOR		C7020	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
188		AE	CAPACITOR		C7021	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
189		AE	CAPACITOR		C7022	1-165-669-21	ELECT CHIP 220UF 20% 6.3V		
190		AE	CAPACITOR		C7023	1-165-669-21	ELECT CHIP 220UF 20% 6.3V		
191		AE	CAPACITOR		C7101	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
192		AE	CAPACITOR		C7102	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
193		AE	CAPACITOR		C7103	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
194		AE	CAPACITOR		C7201	1-128-528-11	ELECT 470UF 20.00% 25V		
195		AE	CAPACITOR		C7202	1-135-349-21	ELECT CHIP 22UF 20% 20V		
196		AE	CAPACITOR		C7204	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
197		AE	CAPACITOR		C7205	1-135-372-31	ELECT 470UF 20% 10V		
198		AE	CAPACITOR		C7207	1-128-359-11	ELECT CHIP 100UF 20.00% 10V		
199		AE	CAPACITOR		C7208	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
200		AE	CAPACITOR		C7209	1-128-360-11	ELECT CHIP 220UF 20.00% 10V		
201		AE	CAPACITOR		C7210	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
202		AE	CAPACITOR		C7211	1-128-359-11	ELECT CHIP 100UF 20.00% 10V		
203		AE	CAPACITOR		C7212	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
204		AE	CAPACITOR		C7213	1-128-360-11	ELECT CHIP 220UF 20.00% 10V		
205		AE	CAPACITOR		C7214	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
206		AE	CAPACITOR		C7301	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
207		AE	CAPACITOR		C7302	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
208		AE	CAPACITOR		C7303	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
209		AE	CAPACITOR		C7304	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
210		AE	CAPACITOR		C7305	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
211		AE	CAPACITOR		C7306	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
212		AE	CAPACITOR		C7307	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
213		AE	CAPACITOR		C7308	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
214		AE	CAPACITOR		C7501	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
215		AE	CAPACITOR		C7502	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
216		AE	CAPACITOR		C7503	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
217		AE	CAPACITOR		C8002	1-162-915-11	CERAMIC CHIP 10PF 0.50PF 50V		
218		AE	CAPACITOR		C8004	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
219		AE	CAPACITOR		C8005	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
220		AE	CAPACITOR		C8006	1-128-360-11	ELECT CHIP 220UF 20.00% 10V		
221		AE	CAPACITOR		C8007	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
222		AE	CAPACITOR		C8008	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		

No.	#	Board	Type	$\Delta/\%$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
223		AE	CAPACITOR		C8009	1-164-388-91	CERAMIC CHIP 270PF 5.00% 50V		
224		AE	CAPACITOR		C8010	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
225		AE	CAPACITOR		C8011	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
226		AE	CAPACITOR		C8012	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
227		AE	CAPACITOR		C8013	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
228		AE	CAPACITOR		C8014	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
229		AE	CAPACITOR		C8015	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
230		AE	CAPACITOR		C8016	1-115-467-11	CERAMIC CHIP 0.22UF 10.00% 10V		
231		AE	CAPACITOR		C8017	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
232		AE	CAPACITOR		C8501	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
233		AE	CAPACITOR		C8502	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
234		AE	CAPACITOR		C8503	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
235		AE	CAPACITOR		C8504	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
236		AE	CAPACITOR		C8505	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
237		AE	CAPACITOR		C8506	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
238		AE	CAPACITOR		C8507	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
239		AE	CAPACITOR		C8510	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
240		AE	CAPACITOR		C8511	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
241		AE	CAPACITOR		C8512	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
242		AE	CAPACITOR		C8513	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
243		AE	CAPACITOR		C8516	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
244		AE	CAPACITOR		C8517	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
245		AE	CAPACITOR		C8518	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
246		AE	CAPACITOR		C8519	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
247		AE	CAPACITOR		C8521	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
248		AE	CAPACITOR		C8522	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
249		AE	CAPACITOR		C8523	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
250		AE	CAPACITOR		C8524	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
251		AE	CAPACITOR		C8525	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
252		AE	CAPACITOR		C8526	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
253		AE	CAPACITOR		C8527	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
254		AE	CAPACITOR		C8528	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
255		AE	CAPACITOR		C8529	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
256		AE	CAPACITOR		C8530	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
257		AE	CAPACITOR		C8531	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
258		AE	CONNECTOR	*	CN5503	1-815-206-21	PIN, CONNECTOR 50P		
259		AE	CONNECTOR		CN5504	1-817-904-11	CONNECTOR, BOARD TO BOARD 100P		
260		AE	CONNECTOR	*	CN6500	1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P		
261		AE	CONNECTOR		CN7000	1-816-587-21	PIN, CONNECTOR (PC BOARD) 15P		
262		AE	DIODE		D5502	8-719-069-60	DIODE UDZSTE-179.1B		
263		AE	DIODE		D5503	8-719-083-52	DIODE UDZSTE-1716B		
264		AE	DIODE		D5504	8-719-083-52	DIODE UDZSTE-1716B		
265		AE	DIODE		D5510	8-719-081-97	DIODE MMDL914T1		
266		AE	DIODE		D5511	8-719-081-97	DIODE MMDL914T1		
267		AE	DIODE		D6000	8-719-800-76	DIODE 1SS226		
268		AE	DIODE		D6001	8-719-800-76	DIODE 1SS226		
269		AE	DIODE		D6100	8-719-056-85	DIODE UDZ-TE-17-8.2B		
270		AE	DIODE		D6101	8-719-056-85	DIODE UDZ-TE-17-8.2B		
271		AE	DIODE		D6501	6-500-253-01	DIODE RB053L-30TE25		
272		AE	DIODE		D6504	6-500-253-01	DIODE RB053L-30TE25		
273		AE	DIODE		D6600	8-719-081-97	DIODE MMDL914T1		
274		AE	DIODE		D6602	8-719-081-97	DIODE MMDL914T1		
275		AE	DIODE		D6700	8-719-081-97	DIODE MMDL914T1		
276		AE	DIODE		D6703	8-719-081-97	DIODE MMDL914T1		
277		AE	DIODE		D6800	8-719-081-97	DIODE MMDL914T1		
278		AE	DIODE		D7001	6-500-294-01	DIODE PTZ-TE25-3.9B		
279		AE	DIODE		D7002	6-500-295-01	DIODE PTZ-TE25-5.6B		
280		AE	DIODE		D7101	8-719-081-99	DIODE MM3Z13VT1		
281		AE	DIODE		D7202	6-500-579-01	DIODE PTZ-TE25-6.8B		
282		AE	DIODE		D8501	8-719-404-50	DIODE MA111-TX		
283		AE	FERRITE BEAD		FB5501	1-414-445-11	FERRITE 0UH		
284		AE	FERRITE BEAD		FB5502	1-414-445-11	FERRITE 0UH		
285		AE	FERRITE BEAD		FB6100	1-543-949-22	FERRITE 0UH		
286		AE	FERRITE BEAD		FB6101	1-414-445-11	FERRITE 0UH		
287		AE	FERRITE BEAD		FB6102	1-414-445-11	FERRITE 0UH		
288		AE	FERRITE BEAD		FB7501	1-469-775-21	FERRITE 0UH		
289		AE	FERRITE BEAD		FB7502	1-469-775-21	FERRITE 0UH		
290		AE	FERRITE BEAD		FB7503	1-469-775-21	FERRITE 0UH		
291		AE	FERRITE BEAD		FB7504	1-469-775-21	FERRITE 0UH		
292		AE	FERRITE BEAD		FB7505	1-414-445-11	FERRITE 0UH		
293		AE	FERRITE BEAD		FB7506	1-469-775-21	FERRITE 0UH		
294		AE	FERRITE BEAD		FB8501	1-414-445-11	FERRITE 0UH		
295		AE	FERRITE BEAD		FB8502	1-469-775-21	FERRITE 0UH		
296		AE	FILTER		FL6100	1-234-126-21	FERRITE 0UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
297		AE	IC		IC6000	8-759-278-58	IC NJM4558V-TE2		
298		AE	IC		IC6001	8-759-524-00	IC TC4052BF(EL,N)		
299		AE	IC		IC6002	8-759-278-58	IC NJM4558V-TE2		
300		AE	IC		IC6100	6-701-031-11	IC MSP3411G-QA-B11		
301		AE	IC		IC6101	8-759-198-31	IC UPC1093J-1-T		
302		AE	IC		IC6102	6-702-817-12	IC BD3869AF-E2		
303		AE	IC		IC6300	8-759-972-97	IC BA3823LS		
304		AE	IC		IC6301	8-759-278-58	IC NJM4558V-TE2		
305		AE	IC		IC6302	8-759-836-72	IC NJM2521V(TE2)		
306		AE	IC		IC6303	8-759-836-72	IC NJM2521V(TE2)		
307		AE	IC		IC6500	8-759-278-58	IC NJM4558V-TE2		
308		AE	IC		IC6501	8-759-246-70	IC TA8216H		
309		AE	IC		IC6600	8-759-524-00	IC TC4052BF(EL,N)		
310		AE	IC		IC6601	8-759-359-49	IC NJM3414AV(TE2)		
311		AE	IC		IC6602	8-759-278-58	IC NJM4558V-TE2		
312		AE	IC		IC6700	6-703-225-01	IC S-80928CNMC-G8YT2G		
313		AE	IC		IC6800	8-759-075-70	IC TA75S393F		
314		AE	IC		IC7001	6-703-249-01	IC SN105233DBTR		
315		AE	IC		IC7201	6-704-407-01	IC PQ1CZ41H2ZPH		
316		AE	IC		IC7202	8-759-450-47	IC BA05T		
317		AE	IC		IC7203	8-759-450-47	IC BA05T		
318		AE	IC		IC7301	8-759-564-82	IC BA09ST-V5		
319		AE	IC		IC7302	8-759-564-82	IC BA09ST-V5		
320		AE	IC		IC8501	8-759-460-72	IC BA033FP-E2		
321		AE	IC		IC8502	6-704-607-01	IC M24C16-WMN6T(B)		
322		AE	IC		IC8503	6-702-515-01	IC SAA5665HL/M1D/0724		
323		AE	IC		IC8504	6-706-419-01	IC LM393DT (A)		
324		AE	IC		IC8505	8-759-672-39	IC PST573IMT		
325		AE	IC		IC8506	8-759-271-86	IC TC7SH04FU		
326		AE	IC		IC8507	8-759-392-01	IC TC7SH86FU-TE85R		
327		AE	IC		IC8508	6-705-950-01	IC K6F2008V2E-LF70000		
328		AE	IC		IC8509	8-759-523-81	IC TC74VHC08FT(EL)		
329		AE	IC		IC8510	1-540-151-21	SOCKET, IC		
330		AE	COIL		L5501	1-412-987-31	INDUCTOR 4.7UH		
331		AE	COIL		L5502	1-412-987-31	INDUCTOR 4.7UH		
332		AE	COIL		L5503	1-412-987-31	INDUCTOR 4.7UH		
333		AE	COIL		L5504	1-412-989-11	INDUCTOR 6.8UH		
334		AE	COIL		L5505	1-412-029-11	INDUCTOR 10UH		
335		AE	COIL		L5506	1-412-029-11	INDUCTOR 10UH		
336		AE	COIL		L6000	1-412-058-11	INDUCTOR 10UH		
337		AE	COIL		L6100	1-412-029-11	INDUCTOR 10UH		
338		AE	COIL		L6101	1-412-990-41	INDUCTOR 8.2UH		
339		AE	COIL		L6102	1-412-029-11	INDUCTOR 10UH		
340		AE	COIL		L6103	1-412-029-11	INDUCTOR 10UH		
341		AE	COIL		L6104	1-412-029-11	INDUCTOR 10UH		
342		AE	COIL		L6500	1-406-977-21	INDUCTOR 100UH		
343		AE	COIL		L7001	1-406-657-11	INDUCTOR 4.7UH		
344		AE	COIL		L7002	1-424-758-21	INDUCTOR 10UH		
345		AE	COIL		L7003	1-424-758-21	INDUCTOR 10UH		
346		AE	COIL		L7202	1-400-323-21	INDUCTOR 47UH		
347		AE	COIL		L8501	1-412-030-11	INDUCTOR 22UH		
348		AE	COIL		L8502	1-412-030-11	INDUCTOR 22UH		
349		AE	COIL		L8503	1-412-030-11	INDUCTOR 22UH		
350		AE	COIL		L8504	1-412-030-11	INDUCTOR 22UH		
351		AE	COIL		L8505	1-412-029-11	INDUCTOR 10UH		
352		AE	COIL		L8506	1-412-029-11	INDUCTOR 10UH		
353		AE	PHOTO COUPLER		PH6600	8-719-053-15	IC PS2701-1-E3-L		
354		AE	IC LINK	△	PS5501	1-533-674-11	IC LINK 0.5A 50V		
355		AE	IC LINK	△	PS6500	1-533-597-31	IC LINK 5A 90V		
356		AE	IC LINK	△	PS7001	1-533-596-21	IC LINK 4A 90V		
357		AE	IC LINK	△	PS7201	1-533-593-31	IC LINK 2A 90V		
358		AE	TRANSISTOR		Q5502	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
359		AE	TRANSISTOR		Q5503	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
360		AE	TRANSISTOR		Q5504	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
361		AE	TRANSISTOR		Q5505	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
362		AE	TRANSISTOR		Q5506	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
363		AE	TRANSISTOR		Q5507	1-801-806-11	TR DTC144EKA		
364		AE	TRANSISTOR		Q5508	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
365		AE	TRANSISTOR		Q6000	8-729-905-35	TRANSISTOR 2SC4081-R		
366		AE	TRANSISTOR		Q6001	6-550-076-01	TRANSISTOR MUN5213T1		
367		AE	TRANSISTOR		Q6002	6-550-076-01	TRANSISTOR MUN5213T1		
368		AE	TRANSISTOR		Q6051	1-801-806-11	TR DTC144EKA		
369		AE	TRANSISTOR		Q6100	6-550-585-01	TRANSISTOR 2PC4081R-115		
370		AE	TRANSISTOR		Q6101	6-550-586-01	TRANSISTOR 2PA1576R-115		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
371		AE	TRANSISTOR		Q6102	6-550-585-01	TRANSISTOR 2PC4081R-115		
372		AE	TRANSISTOR		Q6103	6-550-585-01	TRANSISTOR 2PC4081R-115		
373		AE	TRANSISTOR		Q6300	6-550-076-01	TRANSISTOR MUN5213T1		
374		AE	TRANSISTOR		Q6500	6-550-586-01	TRANSISTOR 2PA1576R-115		
375		AE	TRANSISTOR		Q6602	8-729-044-58	TRANSISTOR SI2304DS-T1		
376		AE	TRANSISTOR		Q6603	8-729-044-58	TRANSISTOR SI2304DS-T1		
377		AE	TRANSISTOR		Q6604	8-729-044-58	TRANSISTOR SI2304DS-T1		
378		AE	TRANSISTOR		Q6605	8-729-044-58	TRANSISTOR SI2304DS-T1		
379		AE	TRANSISTOR		Q6606	8-729-907-00	TRANSISTOR DTC114EU		
380		AE	TRANSISTOR		Q6700	6-550-076-01	TRANSISTOR MUN5213T1		
381		AE	TRANSISTOR		Q6701	6-550-076-01	TRANSISTOR MUN5213T1		
382		AE	TRANSISTOR		Q6702	6-550-076-01	TRANSISTOR MUN5213T1		
383		AE	TRANSISTOR		Q6703	6-550-585-01	TRANSISTOR 2PC4081R-115		
384		AE	TRANSISTOR		Q6705	6-550-585-01	TRANSISTOR 2PC4081R-115		
385		AE	TRANSISTOR		Q6706	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
386		AE	TRANSISTOR		Q6707	8-729-907-00	TRANSISTOR DTC114EU		
387		AE	TRANSISTOR		Q6708	6-550-586-01	TRANSISTOR 2PA1576R-115		
388		AE	TRANSISTOR		Q6709	6-550-586-01	TRANSISTOR 2PA1576R-115		
389		AE	TRANSISTOR		Q6710	8-729-907-00	TRANSISTOR DTC114EU		
390		AE	TRANSISTOR		Q6711	8-729-907-00	TRANSISTOR DTC114EU		
391		AE	TRANSISTOR		Q7001	6-550-222-01	TRANSISTOR IRF7335D1-TR		
392		AE	TRANSISTOR		Q7002	6-550-222-01	TRANSISTOR IRF7335D1-TR		
393		AE	TRANSISTOR		Q7101	8-729-054-36	TRANSISTOR UPA1716G-E2		
394		AE	TRANSISTOR		Q7102	8-729-907-00	TRANSISTOR DTC114EU		
395		AE	TRANSISTOR		Q8501	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
396		AE	TRANSISTOR		Q8502	8-729-424-08	TRANSISTOR UN2111		
397		AE	TRANSISTOR		Q8503	8-729-421-22	TRANSISTOR UN2211		
398		AE	TRANSISTOR		Q8504	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
399		AE	RESISTOR		R5506	1-216-864-11	SHORT CHIP 0		
400		AE	RESISTOR		R5507	1-216-864-11	SHORT CHIP 0		
401		AE	RESISTOR		R5509	1-216-864-11	SHORT CHIP 0		
402		AE	RESISTOR		R5510	1-216-864-11	SHORT CHIP 0		
403		AE	RESISTOR		R5511	1-216-809-11	METAL CHIP 100 5% 1/10W		
404		AE	RESISTOR		R5512	1-216-809-11	METAL CHIP 100 5% 1/10W		
405		AE	RESISTOR		R5513	1-216-821-11	METAL CHIP 1K 5% 1/10W		
406		AE	RESISTOR		R5514	1-216-809-11	METAL CHIP 100 5% 1/10W		
407		AE	RESISTOR		R5515	1-216-821-11	METAL CHIP 1K 5% 1/10W		
408		AE	RESISTOR		R5516	1-216-033-00	RES-CHIP 220 5% 1/10W		
409		AE	RESISTOR		R5517	1-216-033-00	RES-CHIP 220 5% 1/10W		
410		AE	RESISTOR		R5518	1-216-033-00	RES-CHIP 220 5% 1/10W		
411		AE	RESISTOR		R5519	1-216-001-00	RES-CHIP 10 5% 1/10W		
412		AE	RESISTOR		R5520	1-216-034-00	RES-CHIP 240 5% 1/10W		
413		AE	RESISTOR		R5521	1-216-817-11	METAL CHIP 470 5% 1/10W		
414		AE	RESISTOR		R5522	1-216-841-11	METAL CHIP 47K 5% 1/10W		
415		AE	RESISTOR		R5523	1-216-853-11	METAL CHIP 470K 5% 1/10W		
416		AE	RESISTOR		R5524	1-216-839-11	METAL CHIP 33K 5% 1/10W		
417		AE	RESISTOR		R5525	1-216-839-11	METAL CHIP 33K 5% 1/10W		
418		AE	RESISTOR		R5526	1-216-833-11	METAL CHIP 10K 5% 1/10W		
419		AE	RESISTOR		R5527	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
420		AE	RESISTOR		R5528	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
421		AE	RESISTOR		R5529	1-216-864-11	SHORT CHIP 0		
422		AE	RESISTOR		R5530	1-216-864-11	SHORT CHIP 0		
423		AE	RESISTOR		R5531	1-216-845-11	METAL CHIP 100K 5% 1/10W		
424		AE	RESISTOR		R5535	1-216-864-11	SHORT CHIP 0		
425		AE	RESISTOR		R5578	1-218-288-11	METAL CHIP 300 5% 1/10W		
426		AE	RESISTOR		R5579	1-218-288-11	METAL CHIP 300 5% 1/10W		
427		AE	RESISTOR		R6000	1-216-821-11	METAL CHIP 1K 5% 1/10W		
428		AE	RESISTOR		R6001	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
429		AE	RESISTOR		R6002	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
430		AE	RESISTOR		R6003	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
431		AE	RESISTOR		R6004	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
432		AE	RESISTOR		R6005	1-216-821-11	METAL CHIP 1K 5% 1/10W		
433		AE	RESISTOR		R6006	1-216-841-11	METAL CHIP 47K 5% 1/10W		
434		AE	RESISTOR		R6007	1-216-841-11	METAL CHIP 47K 5% 1/10W		
435		AE	RESISTOR		R6008	1-216-841-11	METAL CHIP 47K 5% 1/10W		
436		AE	RESISTOR		R6009	1-216-841-11	METAL CHIP 47K 5% 1/10W		
437		AE	RESISTOR		R6010	1-216-841-11	METAL CHIP 47K 5% 1/10W		
438		AE	RESISTOR		R6011	1-216-841-11	METAL CHIP 47K 5% 1/10W		
439		AE	RESISTOR		R6012	1-216-841-11	METAL CHIP 47K 5% 1/10W		
440		AE	RESISTOR		R6013	1-216-841-11	METAL CHIP 47K 5% 1/10W		
441		AE	RESISTOR		R6014	1-216-841-11	METAL CHIP 47K 5% 1/10W		
442		AE	RESISTOR		R6015	1-216-837-11	METAL CHIP 22K 5% 1/10W		
443		AE	RESISTOR		R6016	1-216-841-11	METAL CHIP 47K 5% 1/10W		
444		AE	RESISTOR		R6017	1-216-821-11	METAL CHIP 1K 5% 1/10W		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
445		AE	RESISTOR		R6018	1-216-815-11	METAL CHIP 330 5% 1/10W		
446		AE	RESISTOR		R6019	1-216-815-11	METAL CHIP 330 5% 1/10W		
447		AE	RESISTOR		R6020	1-216-841-11	METAL CHIP 47K 5% 1/10W		
448		AE	RESISTOR		R6021	1-216-841-11	METAL CHIP 47K 5% 1/10W		
449		AE	RESISTOR		R6022	1-216-821-11	METAL CHIP 1K 5% 1/10W		
450		AE	RESISTOR		R6023	1-216-821-11	METAL CHIP 1K 5% 1/10W		
451		AE	RESISTOR		R6024	1-216-864-11	SHORT CHIP 0		
452		AE	RESISTOR		R6025	1-216-864-11	SHORT CHIP 0		
453		AE	RESISTOR		R6026	1-216-833-11	METAL CHIP 10K 5% 1/10W		
454		AE	RESISTOR		R6027	1-216-833-11	METAL CHIP 10K 5% 1/10W		
455		AE	RESISTOR		R6056	1-216-833-11	METAL CHIP 10K 5% 1/10W		
456		AE	RESISTOR		R6100	1-216-821-11	METAL CHIP 1K 5% 1/10W		
457		AE	RESISTOR		R6103	1-216-295-91	SHORT CHIP 0		
458		AE	RESISTOR		R6104	1-216-295-91	SHORT CHIP 0		
459		AE	RESISTOR		R6106	1-216-841-11	METAL CHIP 47K 5% 1/10W		
460		AE	RESISTOR		R6108	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
461		AE	RESISTOR		R6109	1-163-287-11	CERAMIC CHIP 10PF 5.00% 50V		
462		AE	RESISTOR		R6110	1-216-864-11	SHORT CHIP 0		
463		AE	RESISTOR		R6111	1-216-864-11	SHORT CHIP 0		
464		AE	RESISTOR		R6112	1-216-845-11	METAL CHIP 100K 5% 1/10W		
465		AE	RESISTOR		R6113	1-216-864-11	SHORT CHIP 0		
466		AE	RESISTOR		R6115	1-216-809-11	METAL CHIP 100 5% 1/10W		
467		AE	RESISTOR		R6116	1-216-864-11	SHORT CHIP 0		
468		AE	RESISTOR		R6117	1-216-809-11	METAL CHIP 100 5% 1/10W		
469		AE	RESISTOR		R6118	1-216-809-11	METAL CHIP 100 5% 1/10W		
470		AE	RESISTOR		R6120	1-216-864-11	SHORT CHIP 0		
471		AE	RESISTOR		R6122	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
472		AE	RESISTOR		R6123	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
473		AE	RESISTOR		R6125	1-216-864-11	SHORT CHIP 0		
474		AE	RESISTOR		R6126	1-216-864-11	SHORT CHIP 0		
475		AE	RESISTOR		R6129	1-216-835-11	METAL CHIP 15K 5% 1/10W		
476		AE	RESISTOR		R6130	1-216-835-11	METAL CHIP 15K 5% 1/10W		
477		AE	RESISTOR		R6131	1-216-841-11	METAL CHIP 47K 5% 1/10W		
478		AE	RESISTOR		R6132	1-216-809-11	METAL CHIP 100 5% 1/10W		
479		AE	RESISTOR		R6133	1-216-017-91	RES-CHIP 47 5% 1/10W		
480		AE	RESISTOR		R6134	1-216-017-91	RES-CHIP 47 5% 1/10W		
481		AE	RESISTOR		R6137	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
482		AE	RESISTOR		R6138	1-216-821-11	METAL CHIP 1K 5% 1/10W		
483		AE	RESISTOR		R6139	1-216-836-11	METAL CHIP 18K 5% 1/10W		
484		AE	RESISTOR		R6140	1-216-839-11	METAL CHIP 33K 5% 1/10W		
485		AE	RESISTOR		R6141	1-216-836-11	METAL CHIP 18K 5% 1/10W		
486		AE	RESISTOR		R6142	1-216-839-11	METAL CHIP 33K 5% 1/10W		
487		AE	RESISTOR		R6143	1-218-841-11	METAL CHIP 560 0.5% 1/10W		
488		AE	RESISTOR		R6146	1-218-841-11	METAL CHIP 560 0.5% 1/10W		
489		AE	RESISTOR		R6147	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
490		AE	RESISTOR		R6148	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
491		AE	RESISTOR		R6149	1-218-890-11	METAL CHIP 62K 0.5% 1/10W		
492		AE	RESISTOR		R6150	1-218-890-11	METAL CHIP 62K 0.5% 1/10W		
493		AE	RESISTOR		R6152	1-216-864-11	SHORT CHIP 0		
494		AE	RESISTOR		R6153	1-216-847-11	METAL CHIP 150K 5% 1/10W		
495		AE	RESISTOR		R6154	1-216-847-11	METAL CHIP 150K 5% 1/10W		
496		AE	RESISTOR		R6155	1-216-809-11	METAL CHIP 100 5% 1/10W		
497		AE	RESISTOR		R6156	1-216-809-11	METAL CHIP 100 5% 1/10W		
498		AE	RESISTOR		R6157	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
499		AE	RESISTOR		R6158	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
500		AE	RESISTOR		R6160	1-216-864-11	SHORT CHIP 0		
501		AE	RESISTOR		R6161	1-216-864-11	SHORT CHIP 0		
502		AE	RESISTOR		R6300	1-216-834-11	METAL CHIP 12K 5% 1/10W		
503		AE	RESISTOR		R6301	1-216-833-11	METAL CHIP 10K 5% 1/10W		
504		AE	RESISTOR		R6302	1-216-838-11	METAL CHIP 27K 5% 1/10W		
505		AE	RESISTOR		R6303	1-216-838-11	METAL CHIP 27K 5% 1/10W		
506		AE	RESISTOR		R6304	1-216-841-11	METAL CHIP 47K 5% 1/10W		
507		AE	RESISTOR		R6305	1-216-821-11	METAL CHIP 1K 5% 1/10W		
508		AE	RESISTOR		R6306	1-216-845-11	METAL CHIP 100K 5% 1/10W		
509		AE	RESISTOR		R6307	1-216-845-11	METAL CHIP 100K 5% 1/10W		
510		AE	RESISTOR		R6308	1-216-864-11	SHORT CHIP 0		
511		AE	RESISTOR		R6309	1-216-864-11	SHORT CHIP 0		
512		AE	RESISTOR		R6310	1-216-845-11	METAL CHIP 100K 5% 1/10W		
513		AE	RESISTOR		R6311	1-216-845-11	METAL CHIP 100K 5% 1/10W		
514		AE	RESISTOR		R6312	1-216-841-11	METAL CHIP 47K 5% 1/10W		
515		AE	RESISTOR		R6313	1-216-821-11	METAL CHIP 1K 5% 1/10W		
516		AE	RESISTOR		R6314	1-216-833-11	METAL CHIP 10K 5% 1/10W		
517		AE	RESISTOR		R6315	1-216-833-11	METAL CHIP 10K 5% 1/10W		
518		AE	RESISTOR		R6316	1-216-838-11	METAL CHIP 27K 5% 1/10W		

No.	#	Board	Type	$\Delta/\%$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
519		AE	RESISTOR		R6317	1-216-838-11	METAL CHIP 27K 5% 1/10W		
520		AE	RESISTOR		R6319	1-216-838-11	METAL CHIP 27K 5% 1/10W		
521		AE	RESISTOR		R6320	1-216-838-11	METAL CHIP 27K 5% 1/10W		
522		AE	RESISTOR		R6322	1-216-841-11	METAL CHIP 47K 5% 1/10W		
523		AE	RESISTOR		R6323	1-216-821-11	METAL CHIP 1K 5% 1/10W		
524		AE	RESISTOR		R6324	1-216-841-11	METAL CHIP 47K 5% 1/10W		
525		AE	RESISTOR		R6325	1-216-821-11	METAL CHIP 1K 5% 1/10W		
526		AE	RESISTOR		R6326	1-216-838-11	METAL CHIP 27K 5% 1/10W		
527		AE	RESISTOR		R6327	1-216-838-11	METAL CHIP 27K 5% 1/10W		
528		AE	RESISTOR		R6328	1-216-833-11	METAL CHIP 10K 5% 1/10W		
529		AE	RESISTOR		R6329	1-216-833-11	METAL CHIP 10K 5% 1/10W		
530		AE	RESISTOR		R6330	1-216-838-11	METAL CHIP 27K 5% 1/10W		
531		AE	RESISTOR		R6331	1-216-838-11	METAL CHIP 27K 5% 1/10W		
532		AE	RESISTOR		R6332	1-218-289-11	METAL CHIP 510 5% 1/10W		
533		AE	RESISTOR		R6333	1-216-838-11	METAL CHIP 27K 5% 1/10W		
534		AE	RESISTOR		R6334	1-216-838-11	METAL CHIP 27K 5% 1/10W		
535		AE	RESISTOR		R6335	1-216-838-11	METAL CHIP 27K 5% 1/10W		
536		AE	RESISTOR		R6336	1-216-838-11	METAL CHIP 27K 5% 1/10W		
537		AE	RESISTOR		R6337	1-218-289-11	METAL CHIP 510 5% 1/10W		
538		AE	RESISTOR		R6338	1-216-837-11	METAL CHIP 22K 5% 1/10W		
539		AE	RESISTOR		R6340	1-216-837-11	METAL CHIP 22K 5% 1/10W		
540		AE	RESISTOR		R6342	1-216-864-11	SHORT CHIP 0		
541		AE	RESISTOR		R6343	1-216-809-11	METAL CHIP 100 5% 1/10W		
542		AE	RESISTOR		R6344	1-216-809-11	METAL CHIP 100 5% 1/10W		
543		AE	RESISTOR		R6345	1-216-821-11	METAL CHIP 1K 5% 1/10W		
544		AE	RESISTOR		R6346	1-216-833-11	METAL CHIP 10K 5% 1/10W		
545		AE	RESISTOR		R6347	1-216-821-11	METAL CHIP 1K 5% 1/10W		
546		AE	RESISTOR		R6500	1-216-864-11	SHORT CHIP 0		
547		AE	RESISTOR		R6501	1-216-864-11	SHORT CHIP 0		
548		AE	RESISTOR		R6502	1-216-864-11	SHORT CHIP 0		
549		AE	RESISTOR		R6503	1-216-864-11	SHORT CHIP 0		
550		AE	RESISTOR		R6504	1-216-864-11	SHORT CHIP 0		
551		AE	RESISTOR		R6505	1-216-838-11	METAL CHIP 27K 5% 1/10W		
552		AE	RESISTOR		R6506	1-216-838-11	METAL CHIP 27K 5% 1/10W		
553		AE	RESISTOR		R6507	1-216-834-11	METAL CHIP 12K 5% 1/10W		
554		AE	RESISTOR		R6508	1-216-833-11	METAL CHIP 10K 5% 1/10W		
555		AE	RESISTOR		R6509	1-216-845-11	METAL CHIP 100K 5% 1/10W		
556		AE	RESISTOR		R6510	1-216-845-11	METAL CHIP 100K 5% 1/10W		
557		AE	RESISTOR		R6511	1-216-864-11	SHORT CHIP 0		
558		AE	RESISTOR		R6512	1-216-845-11	METAL CHIP 100K 5% 1/10W		
559		AE	RESISTOR		R6513	1-216-845-11	METAL CHIP 100K 5% 1/10W		
560		AE	RESISTOR		R6514	1-216-864-11	SHORT CHIP 0		
561		AE	RESISTOR		R6515	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
562		AE	RESISTOR		R6516	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
563		AE	RESISTOR		R6518	1-216-798-11	METAL CHIP 12 5% 1/10W		
564		AE	RESISTOR		R6519	1-216-798-11	METAL CHIP 12 5% 1/10W		
565		AE	RESISTOR		R6520	1-216-295-91	SHORT CHIP 0		
566		AE	RESISTOR		R6521	1-216-295-91	SHORT CHIP 0		
567		AE	RESISTOR		R6522	1-216-798-11	METAL CHIP 12 5% 1/10W		
568		AE	RESISTOR		R6523	1-216-798-11	METAL CHIP 12 5% 1/10W		
569		AE	RESISTOR		R6524	1-216-295-91	SHORT CHIP 0		
570		AE	RESISTOR		R6525	1-216-798-11	METAL CHIP 12 5% 1/10W		
571		AE	RESISTOR		R6526	1-216-798-11	METAL CHIP 12 5% 1/10W		
572		AE	RESISTOR		R6527	1-216-798-11	METAL CHIP 12 5% 1/10W		
573		AE	RESISTOR		R6528	1-216-798-11	METAL CHIP 12 5% 1/10W		
574		AE	RESISTOR		R6529	1-216-798-11	METAL CHIP 12 5% 1/10W		
575		AE	RESISTOR		R6534	1-216-798-11	METAL CHIP 12 5% 1/10W		
576		AE	RESISTOR		R6535	1-216-864-11	SHORT CHIP 0		
577		AE	RESISTOR		R6536	1-216-845-11	METAL CHIP 100K 5% 1/10W		
578		AE	RESISTOR		R6537	1-216-864-11	SHORT CHIP 0		
579		AE	RESISTOR		R6538	1-216-845-11	METAL CHIP 100K 5% 1/10W		
580		AE	RESISTOR		R6600	1-216-841-11	METAL CHIP 47K 5% 1/10W		
581		AE	RESISTOR		R6601	1-216-841-11	METAL CHIP 47K 5% 1/10W		
582		AE	RESISTOR		R6602	1-216-841-11	METAL CHIP 47K 5% 1/10W		
583		AE	RESISTOR		R6603	1-216-841-11	METAL CHIP 47K 5% 1/10W		
584		AE	RESISTOR		R6604	1-216-841-11	METAL CHIP 47K 5% 1/10W		
585		AE	RESISTOR		R6605	1-216-841-11	METAL CHIP 47K 5% 1/10W		
586		AE	RESISTOR		R6606	1-216-841-11	METAL CHIP 47K 5% 1/10W		
587		AE	RESISTOR		R6607	1-216-841-11	METAL CHIP 47K 5% 1/10W		
588		AE	RESISTOR		R6608	1-216-841-11	METAL CHIP 47K 5% 1/10W		
589		AE	RESISTOR		R6609	1-216-841-11	METAL CHIP 47K 5% 1/10W		
590		AE	RESISTOR		R6611	1-216-864-11	SHORT CHIP 0		
591		AE	RESISTOR		R6612	1-216-864-11	SHORT CHIP 0		
592		AE	RESISTOR		R6614	1-216-821-11	METAL CHIP 1K 5% 1/10W		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
593		AE	RESISTOR		R6615	1-218-747-11	METAL CHIP 200K 0.5% 1/10W		
594		AE	RESISTOR		R6616	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
595		AE	RESISTOR		R6617	1-216-833-11	METAL CHIP 10K 5% 1/10W		
596		AE	RESISTOR		R6618	1-216-833-11	METAL CHIP 10K 5% 1/10W		
597		AE	RESISTOR		R6619	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
598		AE	RESISTOR		R6620	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
599		AE	RESISTOR		R6621	1-216-833-11	METAL CHIP 10K 5% 1/10W		
600		AE	RESISTOR		R6622	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
601		AE	RESISTOR		R6623	1-216-841-11	METAL CHIP 47K 5% 1/10W		
602		AE	RESISTOR		R6624	1-216-833-11	METAL CHIP 10K 5% 1/10W		
603		AE	RESISTOR		R6625	1-216-841-11	METAL CHIP 47K 5% 1/10W		
604		AE	RESISTOR		R6626	1-216-864-11	SHORT CHIP 0		
605		AE	RESISTOR		R6627	1-216-833-11	METAL CHIP 10K 5% 1/10W		
606		AE	RESISTOR		R6628	1-216-833-11	METAL CHIP 10K 5% 1/10W		
607		AE	RESISTOR		R6629	1-216-822-11	METAL CHIP 1.2K 5% 1/10W		
608		AE	RESISTOR		R6630	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
609		AE	RESISTOR		R6631	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
610		AE	RESISTOR		R6632	1-216-822-11	METAL CHIP 1.2K 5% 1/10W		
611		AE	RESISTOR		R6633	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
612		AE	RESISTOR		R6634	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
613		AE	RESISTOR		R6635	1-216-822-11	METAL CHIP 1.2K 5% 1/10W		
614		AE	RESISTOR		R6636	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
615		AE	RESISTOR		R6637	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
616		AE	RESISTOR		R6638	1-216-822-11	METAL CHIP 1.2K 5% 1/10W		
617		AE	RESISTOR		R6639	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
618		AE	RESISTOR		R6640	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
619		AE	RESISTOR		R6641	1-216-809-11	METAL CHIP 100 5% 1/10W		
620		AE	RESISTOR		R6642	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
621		AE	RESISTOR		R6643	1-216-845-11	METAL CHIP 100K 5% 1/10W		
622		AE	RESISTOR		R6644	1-216-821-11	METAL CHIP 1K 5% 1/10W		
623		AE	RESISTOR		R6645	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
624		AE	RESISTOR		R6646	1-216-821-11	METAL CHIP 1K 5% 1/10W		
625		AE	RESISTOR		R6647	1-216-845-11	METAL CHIP 100K 5% 1/10W		
626		AE	RESISTOR		R6648	1-216-813-11	METAL CHIP 220 5% 1/10W		
627		AE	RESISTOR		R6649	1-216-813-11	METAL CHIP 220 5% 1/10W		
628		AE	RESISTOR		R6651	1-216-833-11	METAL CHIP 10K 5% 1/10W		
629		AE	RESISTOR		R6652	1-216-840-11	METAL CHIP 39K 5% 1/10W		
630		AE	RESISTOR		R6653	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
631		AE	RESISTOR		R6654	1-216-840-11	METAL CHIP 39K 5% 1/10W		
632		AE	RESISTOR		R6655	1-216-833-11	METAL CHIP 10K 5% 1/10W		
633		AE	RESISTOR		R6656	1-216-833-11	METAL CHIP 10K 5% 1/10W		
634		AE	RESISTOR		R6657	1-216-833-11	METAL CHIP 10K 5% 1/10W		
635		AE	RESISTOR		R6658	1-216-864-11	SHORT CHIP 0		
636		AE	RESISTOR		R6659	1-216-833-11	METAL CHIP 10K 5% 1/10W		
637		AE	RESISTOR		R6660	1-216-833-11	METAL CHIP 10K 5% 1/10W		
638		AE	RESISTOR		R6662	1-216-833-11	METAL CHIP 10K 5% 1/10W		
639		AE	RESISTOR		R6663	1-216-833-11	METAL CHIP 10K 5% 1/10W		
640		AE	RESISTOR		R6664	1-216-833-11	METAL CHIP 10K 5% 1/10W		
641		AE	RESISTOR		R6665	1-216-833-11	METAL CHIP 10K 5% 1/10W		
642		AE	RESISTOR		R6701	1-216-833-11	METAL CHIP 10K 5% 1/10W		
643		AE	RESISTOR		R6702	1-216-833-11	METAL CHIP 10K 5% 1/10W		
644		AE	RESISTOR		R6703	1-216-821-11	METAL CHIP 1K 5% 1/10W		
645		AE	RESISTOR		R6705	1-216-833-11	METAL CHIP 10K 5% 1/10W		
646		AE	RESISTOR		R6706	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
647		AE	RESISTOR		R6707	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W		
648		AE	RESISTOR		R6708	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
649		AE	RESISTOR		R6709	1-216-833-11	METAL CHIP 10K 5% 1/10W		
650		AE	RESISTOR		R6711	1-216-295-91	SHORT CHIP 0		
651		AE	RESISTOR		R6712	1-216-809-11	METAL CHIP 100 5% 1/10W		
652		AE	RESISTOR		R6713	1-216-833-11	METAL CHIP 10K 5% 1/10W		
653		AE	RESISTOR		R6715	1-216-864-11	SHORT CHIP 0		
654		AE	RESISTOR		R6716	1-216-864-11	SHORT CHIP 0		
655		AE	RESISTOR		R6800	1-218-860-11	METAL CHIP 3.6K 0.5% 1/10W		
656		AE	RESISTOR		R6801	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
657		AE	RESISTOR		R6802	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
658		AE	RESISTOR		R6803	1-218-893-11	METAL CHIP 82K 0.5% 1/10W		
659		AE	RESISTOR		R6804	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
660		AE	RESISTOR		R6805	1-216-809-11	METAL CHIP 100 5% 1/10W		
661		AE	RESISTOR		R6806	1-216-842-11	METAL CHIP 56K 5% 1/10W		
662		AE	RESISTOR		R6807	1-216-845-11	METAL CHIP 100K 5% 1/10W		
663		AE	RESISTOR		R7001	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
664		AE	RESISTOR		R7002	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
665		AE	RESISTOR		R7003	1-216-841-11	METAL CHIP 47K 5% 1/10W		
666		AE	RESISTOR		R7004	1-216-841-11	METAL CHIP 47K 5% 1/10W		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
667		AE	RESISTOR		R7005	1-218-857-11	METAL CHIP 2.7K 0.5% 1/10W		
668		AE	RESISTOR		R7006	1-216-821-11	METAL CHIP 1K 5% 1/10W		
669		AE	RESISTOR		R7007	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
670		AE	RESISTOR		R7008	1-218-857-11	METAL CHIP 2.7K 0.5% 1/10W		
671		AE	RESISTOR		R7009	1-218-835-11	METAL CHIP 330 0.5% 1/10W		
672		AE	RESISTOR		R7010	1-218-856-11	METAL CHIP 2.4K 0.5% 1/10W		
673		AE	RESISTOR		R7011	1-216-864-11	SHORT CHIP 0		
674		AE	RESISTOR		R7012	1-218-835-11	METAL CHIP 330 0.5% 1/10W		
675		AE	RESISTOR		R7013	1-218-881-11	METAL CHIP 27K 0.5% 1/10W		
676		AE	RESISTOR		R7014	1-218-883-11	METAL CHIP 33K 0.5% 1/10W		
677		AE	RESISTOR		R7015	1-216-864-11	SHORT CHIP 0		
678		AE	RESISTOR		R7016	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
679		AE	RESISTOR		R7017	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
680		AE	RESISTOR		R7018	1-216-295-91	SHORT CHIP 0		
681		AE	RESISTOR		R7019	1-216-295-91	SHORT CHIP 0		
682		AE	RESISTOR		R7020	1-216-799-11	METAL CHIP 15 5% 1/10W		
683		AE	RESISTOR		R7021	1-216-799-11	METAL CHIP 15 5% 1/10W		
684		AE	RESISTOR		R7022	1-216-295-91	SHORT CHIP 0		
685		AE	RESISTOR		R7023	1-216-295-91	SHORT CHIP 0		
686		AE	RESISTOR		R7024	1-216-295-91	SHORT CHIP 0		
687		AE	RESISTOR		R7025	1-216-295-91	SHORT CHIP 0		
688		AE	RESISTOR		R7026	1-216-295-91	SHORT CHIP 0		
689		AE	RESISTOR		R7027	1-216-295-91	SHORT CHIP 0		
690		AE	RESISTOR		R7101	1-216-847-11	METAL CHIP 150K 5% 1/10W		
691		AE	RESISTOR		R7102	1-216-839-11	METAL CHIP 33K 5% 1/10W		
692		AE	RESISTOR		R7201	1-216-295-91	SHORT CHIP 0		
693		AE	RESISTOR		R7202	1-216-821-11	METAL CHIP 1K 5% 1/10W		
694		AE	RESISTOR		R7203	1-216-841-11	METAL CHIP 47K 5% 1/10W		
695		AE	RESISTOR		R7204	1-218-860-11	METAL CHIP 3.6K 0.5% 1/10W		
696		AE	RESISTOR		R7205	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
697		AE	RESISTOR		R7301	1-216-295-91	SHORT CHIP 0		
698		AE	RESISTOR		R7302	1-216-295-91	SHORT CHIP 0		
699		AE	RESISTOR		R7303	1-216-295-91	SHORT CHIP 0		
700		AE	RESISTOR		R7304	1-216-295-91	SHORT CHIP 0		
701		AE	RESISTOR		R7307	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
702		AE	RESISTOR		R7308	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
703		AE	RESISTOR		R7309	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
704		AE	RESISTOR		R7310	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
705		AE	RESISTOR		R7501	1-216-864-11	SHORT CHIP 0		
706		AE	RESISTOR		R7502	1-216-864-11	SHORT CHIP 0		
707		AE	RESISTOR		R7503	1-216-864-11	SHORT CHIP 0		
708		AE	RESISTOR		R8504	1-216-837-11	METAL CHIP 22K 5% 1/10W		
709		AE	RESISTOR		R8505	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
710		AE	RESISTOR		R8506	1-216-845-11	METAL CHIP 100K 5% 1/10W		
711		AE	RESISTOR		R8507	1-216-845-11	METAL CHIP 100K 5% 1/10W		
712		AE	RESISTOR		R8508	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
713		AE	RESISTOR		R8509	1-216-809-11	METAL CHIP 100 5% 1/10W		
714		AE	RESISTOR		R8510	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
715		AE	RESISTOR		R8511	1-216-809-11	METAL CHIP 100 5% 1/10W		
716		AE	RESISTOR		R8512	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
717		AE	RESISTOR		R8513	1-216-821-11	METAL CHIP 1K 5% 1/10W		
718		AE	RESISTOR		R8514	1-216-809-11	METAL CHIP 100 5% 1/10W		
719		AE	RESISTOR		R8515	1-216-843-11	METAL CHIP 68K 5% 1/10W		
720		AE	RESISTOR		R8516	1-216-809-11	METAL CHIP 100 5% 1/10W		
721		AE	RESISTOR		R8517	1-216-833-11	METAL CHIP 10K 5% 1/10W		
722		AE	RESISTOR		R8518	1-216-833-11	METAL CHIP 10K 5% 1/10W		
723		AE	RESISTOR		R8519	1-216-845-11	METAL CHIP 100K 5% 1/10W		
724		AE	RESISTOR		R8520	1-216-833-11	METAL CHIP 10K 5% 1/10W		
725		AE	RESISTOR		R8521	1-216-809-11	METAL CHIP 100 5% 1/10W		
726		AE	RESISTOR		R8522	1-216-864-11	SHORT CHIP 0		
727		AE	RESISTOR		R8523	1-216-809-11	METAL CHIP 100 5% 1/10W		
728		AE	RESISTOR		R8524	1-216-809-11	METAL CHIP 100 5% 1/10W		
729		AE	RESISTOR		R8525	1-216-809-11	METAL CHIP 100 5% 1/10W		
730		AE	RESISTOR		R8526	1-216-864-11	SHORT CHIP 0		
731		AE	RESISTOR		R8527	1-216-809-11	METAL CHIP 100 5% 1/10W		
732		AE	RESISTOR		R8528	1-216-809-11	METAL CHIP 100 5% 1/10W		
733		AE	RESISTOR		R8529	1-216-809-11	METAL CHIP 100 5% 1/10W		
734		AE	RESISTOR		R8530	1-216-809-11	METAL CHIP 100 5% 1/10W		
735		AE	RESISTOR		R8531	1-216-809-11	METAL CHIP 100 5% 1/10W		
736		AE	RESISTOR		R8532	1-216-809-11	METAL CHIP 100 5% 1/10W		
737		AE	RESISTOR		R8533	1-216-809-11	METAL CHIP 100 5% 1/10W		
738		AE	RESISTOR		R8534	1-216-809-11	METAL CHIP 100 5% 1/10W		
739		AE	RESISTOR		R8535	1-216-864-11	SHORT CHIP 0		
740		AE	RESISTOR		R8536	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		

No.	#	Board	Type	$\Delta/\%$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
741		AE	RESISTOR		R8537	1-216-817-11	METAL CHIP 470 5% 1/10W		
742		AE	RESISTOR		R8538	1-216-809-11	METAL CHIP 100 5% 1/10W		
743		AE	RESISTOR		R8539	1-216-809-11	METAL CHIP 100 5% 1/10W		
744		AE	RESISTOR		R8540	1-216-809-11	METAL CHIP 100 5% 1/10W		
745		AE	RESISTOR		R8542	1-216-809-11	METAL CHIP 100 5% 1/10W		
746		AE	RESISTOR		R8543	1-216-809-11	METAL CHIP 100 5% 1/10W		
747		AE	RESISTOR		R8544	1-216-809-11	METAL CHIP 100 5% 1/10W		
748		AE	RESISTOR		R8545	1-216-809-11	METAL CHIP 100 5% 1/10W		
749		AE	RESISTOR		R8546	1-216-809-11	METAL CHIP 100 5% 1/10W		
750		AE	RESISTOR		R8547	1-216-809-11	METAL CHIP 100 5% 1/10W		
751		AE	RESISTOR		R8548	1-216-809-11	METAL CHIP 100 5% 1/10W		
752		AE	RESISTOR		R8549	1-218-725-11	METAL CHIP 24K 0.5% 1/10W		
753		AE	RESISTOR		R8550	1-216-809-11	METAL CHIP 100 5% 1/10W		
754		AE	RESISTOR		R8551	1-216-809-11	METAL CHIP 100 5% 1/10W		
755		AE	RESISTOR		R8552	1-216-809-11	METAL CHIP 100 5% 1/10W		
756		AE	RESISTOR		R8553	1-216-809-11	METAL CHIP 100 5% 1/10W		
757		AE	RESISTOR		R8554	1-216-809-11	METAL CHIP 100 5% 1/10W		
758		AE	RESISTOR		R8555	1-216-809-11	METAL CHIP 100 5% 1/10W		
759		AE	RESISTOR		R8556	1-216-809-11	METAL CHIP 100 5% 1/10W		
760		AE	RESISTOR		R8557	1-216-809-11	METAL CHIP 100 5% 1/10W		
761		AE	RESISTOR		R8558	1-216-809-11	METAL CHIP 100 5% 1/10W		
762		AE	RESISTOR		R8559	1-216-809-11	METAL CHIP 100 5% 1/10W		
763		AE	RESISTOR		R8560	1-216-809-11	METAL CHIP 100 5% 1/10W		
764		AE	RESISTOR		R8561	1-216-809-11	METAL CHIP 100 5% 1/10W		
765		AE	RESISTOR		R8562	1-216-809-11	METAL CHIP 100 5% 1/10W		
766		AE	RESISTOR		R8563	1-216-809-11	METAL CHIP 100 5% 1/10W		
767		AE	RESISTOR		R8564	1-216-809-11	METAL CHIP 100 5% 1/10W		
768		AE	RESISTOR		R8565	1-216-809-11	METAL CHIP 100 5% 1/10W		
769		AE	RESISTOR		R8566	1-216-025-11	RES-CHIP 100 5% 1/10W		
770		AE	RESISTOR		R8567	1-216-803-11	METAL CHIP 33 5% 1/10W		
771		AE	RESISTOR		R8568	1-216-833-11	METAL CHIP 10K 5% 1/10W		
772		AE	RESISTOR		R8569	1-216-803-11	METAL CHIP 33 5% 1/10W		
773		AE	RESISTOR		R8570	1-216-803-11	METAL CHIP 33 5% 1/10W		
774		AE	RESISTOR		R8571	1-216-809-11	METAL CHIP 100 5% 1/10W		
775		AE	RESISTOR		R8572	1-216-817-11	METAL CHIP 470 5% 1/10W		
776		AE	RESISTOR		R8573	1-216-809-11	METAL CHIP 100 5% 1/10W		
777		AE	RESISTOR		R8574	1-216-833-11	METAL CHIP 10K 5% 1/10W		
778		AE	RESISTOR		R8575	1-216-841-11	METAL CHIP 47K 5% 1/10W		
779		AE	RESISTOR		R8576	1-216-817-11	METAL CHIP 470 5% 1/10W		
780		AE	RESISTOR		R8577	1-216-833-11	METAL CHIP 10K 5% 1/10W		
781		AE	RESISTOR		R8578	1-216-809-11	METAL CHIP 100 5% 1/10W		
782		AE	RESISTOR		R8579	1-216-809-11	METAL CHIP 100 5% 1/10W		
783		AE	RESISTOR		R8580	1-216-809-11	METAL CHIP 100 5% 1/10W		
784		AE	RESISTOR		R8581	1-216-809-11	METAL CHIP 100 5% 1/10W		
785		AE	RESISTOR		R8582	1-216-809-11	METAL CHIP 100 5% 1/10W		
786		AE	RESISTOR		R8583	1-216-809-11	METAL CHIP 100 5% 1/10W		
787		AE	RESISTOR		R8584	1-216-809-11	METAL CHIP 100 5% 1/10W		
788		AE	RESISTOR		R8585	1-216-864-11	SHORT CHIP 0		
789		AE	RESISTOR		R8586	1-216-809-11	METAL CHIP 100 5% 1/10W		
790		AE	RESISTOR		R8587	1-216-817-11	METAL CHIP 470 5% 1/10W		
791		AE	RESISTOR		R8588	1-216-833-11	METAL CHIP 10K 5% 1/10W		
792		AE	RESISTOR		R8589	1-216-833-11	METAL CHIP 10K 5% 1/10W		
793		AE	RESISTOR		R8590	1-216-833-11	METAL CHIP 10K 5% 1/10W		
794		AE	RESISTOR		R8591	1-216-833-11	METAL CHIP 10K 5% 1/10W		
795		AE	RESISTOR		R8592	1-216-833-11	METAL CHIP 10K 5% 1/10W		
796		AE	RESISTOR		R8593	1-216-295-91	SHORT CHIP 0		
797		AE	RESISTOR		R8594	1-216-864-11	SHORT CHIP 0		
798		AE	RESISTOR		R8595	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
799		AE	RESISTOR		R8596	1-216-833-11	METAL CHIP 10K 5% 1/10W		
800		AE	RESISTOR		R8597	1-216-809-11	METAL CHIP 100 5% 1/10W		
801		AE	RESISTOR		R8603	1-216-809-11	METAL CHIP 100 5% 1/10W		
802		AE	RESISTOR		R8604	1-216-809-11	METAL CHIP 100 5% 1/10W		
803		AE	RESISTOR		R8607	1-216-809-11	METAL CHIP 100 5% 1/10W		
804		AE	TRANSFORMER		T5500	1-437-982-11	SOUND INPUT TRANSFORMER		
805		AE	TRANSFORMER		TH6800	1-804-503-21	THERMISTOR		
806		AE	TUNER		TU5501	8-598-535-20	FRONTEND BTF-EF411		
807		AE	VARISTOR		VD5500	1-803-974-21	VARISTOR, CHIP (1608)		
808		AE	VARISTOR		VD5501	1-803-974-21	VARISTOR, CHIP (1608)		
809		AE	VARISTOR		VD6600	1-801-925-21	VARISTOR, CHIP (1608)		
810		AE	VARISTOR		VD6601	1-801-925-21	VARISTOR, CHIP (1608)		
811		AE	VARISTOR		VD6602	1-801-925-21	VARISTOR, CHIP (1608)		
812		AE	CRYSTAL		X6100	1-795-612-11	VIBRATOR, CRYSTAL		
813		AE	CRYSTAL		X8501	1-767-654-21	VIBRATOR, CRYSTAL		
817		ULE	CAPACITOR		C9301	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		

No.	#	Board	Type	$\Delta/\%$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
818		ULE	CAPACITOR		C9302	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
819		ULE	CAPACITOR		C9303	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
820		ULE	CAPACITOR		C9304	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
821		ULE	CAPACITOR		C9306	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
822		ULE	CAPACITOR		C9307	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
823		ULE	CAPACITOR		C9308	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
824		ULE	CAPACITOR		C9309	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
825		ULE	CAPACITOR		C9310	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
826		ULE	CAPACITOR		C9311	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
827		ULE	CAPACITOR		C9312	1-162-926-11	CERAMIC CHIP 82PF 5.00% 50V		
828		ULE	CAPACITOR		C9313	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
829		ULE	CAPACITOR		C9314	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
830		ULE	CAPACITOR		C9315	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
831		ULE	CAPACITOR		C9316	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
832		ULE	CAPACITOR		C9317	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
833		ULE	CAPACITOR		C9318	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
834		ULE	CAPACITOR		C9319	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
835		ULE	CAPACITOR		C9320	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
836		ULE	CAPACITOR		C9321	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
837		ULE	CAPACITOR		C9322	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
838		ULE	CAPACITOR		C9323	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
839		ULE	CAPACITOR		C9324	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
840		ULE	CAPACITOR		C9325	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
841		ULE	CAPACITOR		C9326	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
842		ULE	CAPACITOR		C9327	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
843		ULE	CAPACITOR		C9331	1-162-926-11	CERAMIC CHIP 82PF 5.00% 50V		
844		ULE	CAPACITOR		C9332	1-162-926-11	CERAMIC CHIP 82PF 5.00% 50V		
845		ULE	CAPACITOR		C9333	1-162-926-11	CERAMIC CHIP 82PF 5.00% 50V		
846		ULE	CAPACITOR		C9334	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
847		ULE	CAPACITOR		C9335	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
848		ULE	CAPACITOR		C9336	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
849		ULE	CAPACITOR		C9337	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
850		ULE	CAPACITOR		C9338	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
851		ULE	CAPACITOR		C9339	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
852		ULE	CAPACITOR		C9340	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
853		ULE	CAPACITOR		C9342	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
854		ULE	CAPACITOR		C9343	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
855		ULE	CAPACITOR		C9344	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
856		ULE	CAPACITOR		C9345	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
857		ULE	CAPACITOR		C9346	1-162-926-11	CERAMIC CHIP 82PF 5.00% 50V		
858		ULE	CAPACITOR		C9347	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
859		ULE	CAPACITOR		C9348	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
860		ULE	CAPACITOR		C9349	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
861		ULE	CAPACITOR		C9350	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
862		ULE	CAPACITOR		C9351	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
863		ULE	CAPACITOR		C9352	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
864		ULE	CAPACITOR		C9353	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
865		ULE	CAPACITOR		C9354	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
866		ULE	CAPACITOR		C9355	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
867		ULE	CAPACITOR		C9356	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
868		ULE	CAPACITOR		C9357	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
869		ULE	CAPACITOR		C9358	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
870		ULE	CAPACITOR		C9359	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
871		ULE	CAPACITOR		C9360	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
872		ULE	CAPACITOR		C9361	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
873		ULE	CAPACITOR		C9362	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
874		ULE	CAPACITOR		C9367	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
875		ULE	CAPACITOR		C9368	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
876		ULE	CAPACITOR		C9369	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
877		ULE	CAPACITOR		C9370	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
878		ULE	CAPACITOR		C9372	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
879		ULE	CAPACITOR		C9373	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
880		ULE	CAPACITOR		C9374	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
881		ULE	CAPACITOR		C9375	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
882		ULE	CAPACITOR		C9376	1-162-926-11	CERAMIC CHIP 82PF 5.00% 50V		
883		ULE	CAPACITOR		C9377	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
884		ULE	CAPACITOR		C9378	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
885		ULE	CAPACITOR		C9379	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
886		ULE	CAPACITOR		C9380	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
887		ULE	CAPACITOR		C9381	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
888		ULE	CAPACITOR		C9382	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
889		ULE	CAPACITOR		C9383	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
890		ULE	CAPACITOR		C9384	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
891		ULE	CAPACITOR		C9385	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
892		ULE	CAPACITOR		C9386	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
893		ULE	CAPACITOR		C9402	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
894		ULE	CAPACITOR		C9601	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
895		ULE	CAPACITOR		C9602	1-135-346-21	ELECT CHIP 39UF 20% 16V		
896		ULE	CAPACITOR		C9603	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
897		ULE	CAPACITOR		C9604	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
898		ULE	CAPACITOR		C9605	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
899		ULE	CAPACITOR		C9606	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
900		ULE	CAPACITOR		C9607	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
901		ULE	CAPACITOR		C9608	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
902		ULE	CAPACITOR		C9609	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
903		ULE	CAPACITOR		C9610	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
904		ULE	CAPACITOR		C9611	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
905		ULE	CAPACITOR		C9612	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
906		ULE	CAPACITOR		C9613	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
907		ULE	CAPACITOR		C9614	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
908		ULE	CAPACITOR		C9615	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
909		ULE	CAPACITOR		C9616	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
910		ULE	CAPACITOR		C9617	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
911		ULE	CAPACITOR		C9618	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
912		ULE	CAPACITOR		C9619	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
913		ULE	CAPACITOR		C9620	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
914		ULE	CAPACITOR		C9621	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
915		ULE	CAPACITOR		C9622	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
916		ULE	CAPACITOR		C9623	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
917		ULE	CAPACITOR		C9625	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
918		ULE	CAPACITOR		C9626	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
919		ULE	CAPACITOR		C9627	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
920		ULE	CAPACITOR		C9628	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
921		ULE	CAPACITOR		C9629	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
922		ULE	CAPACITOR		C9630	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
923		ULE	CAPACITOR		C9631	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
924		ULE	CAPACITOR		C9632	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
925		ULE	CAPACITOR		C9633	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
926		ULE	CAPACITOR		C9634	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
927		ULE	CAPACITOR		C9635	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
928		ULE	CAPACITOR		C9636	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
929		ULE	CAPACITOR		C9637	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
930		ULE	CAPACITOR		C9638	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
931		ULE	CAPACITOR		C9639	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
932		ULE	CAPACITOR		C9640	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
933		ULE	CAPACITOR		C9641	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
934		ULE	CAPACITOR		C9642	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
935		ULE	CAPACITOR		C9643	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
936		ULE	CAPACITOR		C9801	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
937		ULE	CAPACITOR		C9802	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
938		ULE	CAPACITOR		C9804	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
939		ULE	CAPACITOR		C9805	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
940		ULE	CAPACITOR		C9807	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
941		ULE	CAPACITOR		C9808	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
942		ULE	CAPACITOR		C9809	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
943		ULE	CAPACITOR		C9810	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
944		ULE	CAPACITOR		C9811	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
945		ULE	CAPACITOR		C9812	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
946		ULE	CAPACITOR		C9813	1-135-346-21	ELECT CHIP 39UF 20% 16V		
947		ULE	CAPACITOR		C9814	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
948		ULE	CAPACITOR		C9815	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
949		ULE	CAPACITOR		C9816	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
950		ULE	CAPACITOR		C9817	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
951		ULE	CAPACITOR		C9818	1-162-914-11	CERAMIC CHIP 9PF 0.50PF 50V		
952		ULE	CAPACITOR		C9819	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
953		ULE	CAPACITOR		C9820	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
954		ULE	CAPACITOR		C9821	1-135-346-21	ELECT CHIP 39UF 20% 16V		
955		ULE	CAPACITOR		C9822	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
956		ULE	CAPACITOR		C9823	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
957		ULE	CAPACITOR		C9824	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
958		ULE	CAPACITOR		C9825	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
959		ULE	CAPACITOR		C9826	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
960		ULE	CAPACITOR		C9827	1-135-346-21	ELECT CHIP 39UF 20% 16V		
961		ULE	CAPACITOR		C9828	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
962		ULE	CAPACITOR		C9830	1-128-360-11	ELECT CHIP 220UF 20.00% 10V		
963		ULE	CAPACITOR		C9831	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
964		ULE	CAPACITOR		C9832	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
965		ULE	CAPACITOR		C9833	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		

No.	#	Board	Type	Δ/\ast	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
966		ULE	CAPACITOR		C9835	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
967		ULE	CAPACITOR		C9836	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
968		ULE	CAPACITOR		C9838	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
969		ULE	CAPACITOR		C9840	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
970		ULE	CAPACITOR		C9841	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
971		ULE	CAPACITOR		C9842	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
972		ULE	CAPACITOR		C9843	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
973		ULE	CAPACITOR		C9844	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
974		ULE	CAPACITOR		C9845	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
975		ULE	CAPACITOR		C9846	1-135-346-21	ELECT CHIP 39UF 20% 16V		
976		ULE	CAPACITOR		C9847	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
977		ULE	CAPACITOR		C9848	1-128-360-11	ELECT CHIP 220UF 20.00% 10V		
978		ULE	CAPACITOR		C9849	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
979		ULE	CAPACITOR		C9850	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
980		ULE	CAPACITOR		C9851	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
981		ULE	CAPACITOR		C9852	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
982		ULE	CAPACITOR		C9853	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
983		ULE	CAPACITOR		C9854	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
984		ULE	CAPACITOR		C9855	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
985		ULE	CAPACITOR		C9856	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
986		ULE	CAPACITOR		C9857	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
987		ULE	CAPACITOR		C9858	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
988		ULE	CAPACITOR		C9859	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
989		ULE	CAPACITOR		C9860	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
990		ULE	CAPACITOR		C9861	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
991		ULE	CAPACITOR		C9862	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
992		ULE	CAPACITOR		C9863	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
993		ULE	CAPACITOR		C9864	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
994		ULE	CAPACITOR		C9865	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
995		ULE	CAPACITOR		C9866	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
996		ULE	CAPACITOR		C9867	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
997		ULE	CAPACITOR		C9868	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
998		ULE	CAPACITOR		C9869	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
999		ULE	CAPACITOR		C9870	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1000		ULE	CAPACITOR		C9871	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1001		ULE	CAPACITOR		C9872	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1002		ULE	CAPACITOR		C9873	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
1003		ULE	CONNECTOR		CN9301	1-695-209-21	PIN, CONNECTOR (PC BOARD) 15P		
1004		ULE	CONNECTOR	*	CN9303	1-793-807-21	PIN, CONNECTOR (WITH PWB) 20P		
1005		ULE	CONNECTOR	*	CN9306	1-815-206-21	PIN, CONNECTOR 50P		
1006		ULE	DIODE		D9301	8-719-083-82	DIODE UDZS-TE17-12B		
1007		ULE	DIODE		D9302	8-719-069-60	DIODE UDZSTE-179.1B		
1008		ULE	DIODE		D9303	8-719-069-60	DIODE UDZSTE-179.1B		
1009		ULE	DIODE		D9304	8-719-069-60	DIODE UDZSTE-179.1B		
1010		ULE	DIODE		D9305	8-719-069-60	DIODE UDZSTE-179.1B		
1011		ULE	DIODE		D9306	8-719-069-60	DIODE UDZSTE-179.1B		
1012		ULE	DIODE		D9307	8-719-069-60	DIODE UDZSTE-179.1B		
1013		ULE	DIODE		D9308	8-719-069-60	DIODE UDZSTE-179.1B		
1014		ULE	DIODE		D9309	8-719-069-60	DIODE UDZSTE-179.1B		
1015		ULE	DIODE		D9310	8-719-069-60	DIODE UDZSTE-179.1B		
1016		ULE	DIODE		D9311	8-719-069-60	DIODE UDZSTE-179.1B		
1017		ULE	DIODE		D9312	8-719-069-60	DIODE UDZSTE-179.1B		
1018		ULE	DIODE		D9313	8-719-069-60	DIODE UDZSTE-179.1B		
1019		ULE	DIODE		D9314	8-719-069-60	DIODE UDZSTE-179.1B		
1020		ULE	DIODE		D9315	8-719-069-60	DIODE UDZSTE-179.1B		
1021		ULE	DIODE		D9316	8-719-069-60	DIODE UDZSTE-179.1B		
1022		ULE	DIODE		D9317	8-719-069-60	DIODE UDZSTE-179.1B		
1023		ULE	DIODE		D9318	8-719-083-82	DIODE UDZS-TE17-12B		
1024		ULE	DIODE		D9319	8-719-069-60	DIODE UDZSTE-179.1B		
1025		ULE	DIODE		D9320	8-719-069-60	DIODE UDZSTE-179.1B		
1026		ULE	DIODE		D9321	8-719-069-60	DIODE UDZSTE-179.1B		
1027		ULE	DIODE		D9322	8-719-069-60	DIODE UDZSTE-179.1B		
1028		ULE	DIODE		D9323	8-719-069-60	DIODE UDZSTE-179.1B		
1029		ULE	DIODE		D9324	8-719-069-60	DIODE UDZSTE-179.1B		
1030		ULE	DIODE		D9325	8-719-069-60	DIODE UDZSTE-179.1B		
1031		ULE	DIODE		D9326	8-719-069-60	DIODE UDZSTE-179.1B		
1032		ULE	DIODE		D9327	8-719-069-60	DIODE UDZSTE-179.1B		
1033		ULE	DIODE		D9328	8-719-069-60	DIODE UDZSTE-179.1B		
1034		ULE	DIODE		D9329	8-719-069-60	DIODE UDZSTE-179.1B		
1035		ULE	DIODE		D9332	8-719-083-82	DIODE UDZS-TE17-12B		
1036		ULE	DIODE		D9333	8-719-069-60	DIODE UDZSTE-179.1B		
1037		ULE	DIODE		D9334	8-719-069-60	DIODE UDZSTE-179.1B		
1038		ULE	DIODE		D9335	8-719-069-60	DIODE UDZSTE-179.1B		
1039		ULE	DIODE		D9336	8-719-069-60	DIODE UDZSTE-179.1B		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1040		ULE	DIODE		D9337	8-719-069-60	DIODE UDZSTE-179.1B		
1041		ULE	DIODE		D9338	8-719-069-60	DIODE UDZSTE-179.1B		
1042		ULE	DIODE		D9339	8-719-069-60	DIODE UDZSTE-179.1B		
1043		ULE	DIODE		D9340	8-719-069-60	DIODE UDZSTE-179.1B		
1044		ULE	DIODE		D9341	8-719-069-60	DIODE UDZSTE-179.1B		
1045		ULE	DIODE		D9342	8-719-069-60	DIODE UDZSTE-179.1B		
1046		ULE	DIODE		D9343	8-719-069-60	DIODE UDZSTE-179.1B		
1047		ULE	FERRITE BEAD		FB9301	1-400-333-21	FERRITE 0UH		
1048		ULE	FERRITE BEAD		FB9302	1-400-333-21	FERRITE 0UH		
1049		ULE	FERRITE BEAD		FB9303	1-400-333-21	FERRITE 0UH		
1050		ULE	FERRITE BEAD		FB9304	1-400-333-21	FERRITE 0UH		
1051		ULE	FERRITE BEAD		FB9305	1-400-333-21	FERRITE 0UH		
1052		ULE	FILTER		FL9601	1-233-765-21	FILTER		
1053		ULE	FILTER		FL9602	1-233-768-21	FILTER		
1054		ULE	FILTER		FL9603	1-233-766-21	FILTER		
1055		ULE	IC		IC9301	6-701-173-01	IC MC74LVXT4053DTR2		
1056		ULE	IC		IC9302	8-759-366-35	IC TC4W66F(TE12R)		
1057		ULE	IC		IC9601	8-752-089-33	IC CXA2069Q-TL		
1058		ULE	IC		IC9602	8-752-390-37	IC CXD2064Q-T6		
1059		ULE	IC		IC9603	8-759-082-60	IC TC7S66FU		
1060		ULE	IC		IC9801	8-753-212-10	IC CXA2163AQ-T6		
1061		ULE	IC		IC9802	8-759-481-08	IC TC7SET02FU(TE85R)		
1062		ULE	IC		IC9804	8-752-108-36	IC CXA2171AQ-T6		
1063		ULE	JACK		J9300	1-561-534-41	SOCKET, PIN 21P		
1064		ULE	JACK		J9301	1-561-534-41	SOCKET, PIN 21P		
1065		ULE	JACK		J9302	1-561-534-41	SOCKET, PIN 21P		
1066		ULE	JACK		J9303	1-565-838-11	JACK BLOCK, PIN 2P		
1067		ULE	JACK		J9304	1-784-623-11	BLOCK, PIN JACK 5P		
1068		ULE	COIL		L9301	1-412-029-11	INDUCTOR 10UH		
1069		ULE	COIL		L9601	1-412-029-11	INDUCTOR 10UH		
1070		ULE	COIL		L9602	1-412-029-11	INDUCTOR 10UH		
1071		ULE	COIL		L9603	1-469-555-21	INDUCTOR 10UH		
1072		ULE	COIL		L9604	1-469-555-21	INDUCTOR 10UH		
1073		ULE	COIL		L9605	1-412-029-11	INDUCTOR 10UH		
1074		ULE	COIL		L9801	1-412-029-11	INDUCTOR 10UH		
1075		ULE	COIL		L9802	1-412-031-11	INDUCTOR 47UH		
1076		ULE	COIL		L9803	1-412-031-11	INDUCTOR 47UH		
1077		ULE	COIL		L9804	1-412-033-11	INDUCTOR 220UH		
1078		ULE	COIL		L9805	1-412-029-11	INDUCTOR 10UH		
1079		ULE	COIL		L9807	1-412-029-11	INDUCTOR 10UH		
1080		ULE	COIL		L9808	1-469-525-91	INDUCTOR 10UH		
1081		ULE	COIL		L9809	1-412-029-11	INDUCTOR 10UH		
1082		ULE	TRANSISTOR		Q9301	8-729-920-21	TRANSISTOR DTC314TK-T-146		
1083		ULE	TRANSISTOR		Q9302	8-729-920-21	TRANSISTOR DTC314TK-T-146		
1084		ULE	TRANSISTOR		Q9303	8-729-920-21	TRANSISTOR DTC314TK-T-146		
1085		ULE	TRANSISTOR		Q9305	8-729-920-21	TRANSISTOR DTC314TK-T-146		
1086		ULE	TRANSISTOR		Q9309	8-729-920-21	TRANSISTOR DTC314TK-T-146		
1087		ULE	TRANSISTOR		Q9310	8-729-920-21	TRANSISTOR DTC314TK-T-146		
1088		ULE	TRANSISTOR		Q9311	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1089		ULE	TRANSISTOR		Q9312	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1090		ULE	TRANSISTOR		Q9601	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1091		ULE	TRANSISTOR		Q9602	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1092		ULE	TRANSISTOR		Q9603	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1093		ULE	TRANSISTOR		Q9604	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1094		ULE	TRANSISTOR		Q9605	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1095		ULE	TRANSISTOR		Q9606	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1096		ULE	TRANSISTOR		Q9607	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1097		ULE	TRANSISTOR		Q9608	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1098		ULE	TRANSISTOR		Q9610	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1099		ULE	TRANSISTOR		Q9611	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1100		ULE	TRANSISTOR		Q9612	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1101		ULE	TRANSISTOR		Q9613	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1102		ULE	TRANSISTOR		Q9614	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1103		ULE	TRANSISTOR		Q9615	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1104		ULE	TRANSISTOR		Q9616	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1105		ULE	TRANSISTOR		Q9617	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1106		ULE	TRANSISTOR		Q9801	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1107		ULE	TRANSISTOR		Q9802	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1108		ULE	TRANSISTOR		Q9803	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1109		ULE	TRANSISTOR		Q9804	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1110		ULE	TRANSISTOR		Q9805	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1111		ULE	TRANSISTOR		Q9806	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1112		ULE	TRANSISTOR		Q9814	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1113		ULE	TRANSISTOR		Q9815	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1114		ULE	TRANSISTOR		Q9816	6-550-586-01	TRANSISTOR 2PA1576R-115		
1115		ULE	TRANSISTOR		Q9817	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1116		ULE	TRANSISTOR		Q9818	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1117		ULE	TRANSISTOR		Q9819	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1118		ULE	TRANSISTOR		Q9820	8-729-025-28	TRANSISTOR 2SK1828		
1119		ULE	TRANSISTOR		Q9821	8-729-025-28	TRANSISTOR 2SK1828		
1120		ULE	TRANSISTOR		Q9823	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1121		ULE	TRANSISTOR		Q9824	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1122		ULE	TRANSISTOR		Q9825	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1123		ULE	RESISTOR		R9301	1-216-813-11	METAL CHIP 220 5% 1/10W		
1124		ULE	RESISTOR		R9302	1-216-813-11	METAL CHIP 220 5% 1/10W		
1125		ULE	RESISTOR		R9303	1-216-813-11	METAL CHIP 220 5% 1/10W		
1126		ULE	RESISTOR		R9304	1-218-285-11	METAL CHIP 75 5% 1/10W		
1127		ULE	RESISTOR		R9305	1-218-285-11	METAL CHIP 75 5% 1/10W		
1128		ULE	RESISTOR		R9306	1-218-285-11	METAL CHIP 75 5% 1/10W		
1129		ULE	RESISTOR		R9307	1-216-022-00	RES-CHIP 75 5% 1/10W		
1130		ULE	RESISTOR		R9308	1-216-815-11	METAL CHIP 330 5% 1/10W		
1131		ULE	RESISTOR		R9309	1-216-815-11	METAL CHIP 330 5% 1/10W		
1132		ULE	RESISTOR		R9310	1-216-815-11	METAL CHIP 330 5% 1/10W		
1133		ULE	RESISTOR		R9311	1-216-815-11	METAL CHIP 330 5% 1/10W		
1134		ULE	RESISTOR		R9312	1-218-285-11	METAL CHIP 75 5% 1/10W		
1135		ULE	RESISTOR		R9313	1-216-809-11	METAL CHIP 100 5% 1/10W		
1136		ULE	RESISTOR		R9314	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1137		ULE	RESISTOR		R9315	1-216-815-11	METAL CHIP 330 5% 1/10W		
1138		ULE	RESISTOR		R9316	1-216-815-11	METAL CHIP 330 5% 1/10W		
1139		ULE	RESISTOR		R9317	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1140		ULE	RESISTOR		R9318	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1141		ULE	RESISTOR		R9319	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1142		ULE	RESISTOR		R9320	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1143		ULE	RESISTOR		R9321	1-216-809-11	METAL CHIP 100 5% 1/10W		
1144		ULE	RESISTOR		R9322	1-216-809-11	METAL CHIP 100 5% 1/10W		
1145		ULE	RESISTOR		R9323	1-216-809-11	METAL CHIP 100 5% 1/10W		
1146		ULE	RESISTOR		R9324	1-216-809-11	METAL CHIP 100 5% 1/10W		
1147		ULE	RESISTOR		R9325	1-216-813-11	METAL CHIP 220 5% 1/10W		
1148		ULE	RESISTOR		R9326	1-216-813-11	METAL CHIP 220 5% 1/10W		
1149		ULE	RESISTOR		R9327	1-216-813-11	METAL CHIP 220 5% 1/10W		
1150		ULE	RESISTOR		R9328	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1151		ULE	RESISTOR		R9329	1-216-809-11	METAL CHIP 100 5% 1/10W		
1152		ULE	RESISTOR		R9330	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1153		ULE	RESISTOR		R9331	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1154		ULE	RESISTOR		R9332	1-216-813-11	METAL CHIP 220 5% 1/10W		
1155		ULE	RESISTOR		R9333	1-216-813-11	METAL CHIP 220 5% 1/10W		
1156		ULE	RESISTOR		R9334	1-216-813-11	METAL CHIP 220 5% 1/10W		
1157		ULE	RESISTOR		R9335	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1158		ULE	RESISTOR		R9336	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1159		ULE	RESISTOR		R9337	1-216-809-11	METAL CHIP 100 5% 1/10W		
1160		ULE	RESISTOR		R9338	1-216-813-11	METAL CHIP 220 5% 1/10W		
1161		ULE	RESISTOR		R9339	1-216-813-11	METAL CHIP 220 5% 1/10W		
1162		ULE	RESISTOR		R9340	1-216-813-11	METAL CHIP 220 5% 1/10W		
1163		ULE	RESISTOR		R9341	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1164		ULE	RESISTOR		R9342	1-216-809-11	METAL CHIP 100 5% 1/10W		
1165		ULE	RESISTOR		R9343	1-216-809-11	METAL CHIP 100 5% 1/10W		
1166		ULE	RESISTOR		R9344	1-216-809-11	METAL CHIP 100 5% 1/10W		
1167		ULE	RESISTOR		R9345	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1168		ULE	RESISTOR		R9346	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1169		ULE	RESISTOR		R9347	1-216-809-11	METAL CHIP 100 5% 1/10W		
1170		ULE	RESISTOR		R9348	1-216-809-11	METAL CHIP 100 5% 1/10W		
1171		ULE	RESISTOR		R9349	1-216-809-11	METAL CHIP 100 5% 1/10W		
1172		ULE	RESISTOR		R9350	1-216-809-11	METAL CHIP 100 5% 1/10W		
1173		ULE	RESISTOR		R9351	1-216-813-11	METAL CHIP 220 5% 1/10W		
1174		ULE	RESISTOR		R9352	1-216-813-11	METAL CHIP 220 5% 1/10W		
1175		ULE	RESISTOR		R9353	1-216-813-11	METAL CHIP 220 5% 1/10W		
1176		ULE	RESISTOR		R9354	1-218-285-11	METAL CHIP 75 5% 1/10W		
1177		ULE	RESISTOR		R9355	1-218-285-11	METAL CHIP 75 5% 1/10W		
1178		ULE	RESISTOR		R9356	1-218-285-11	METAL CHIP 75 5% 1/10W		
1179		ULE	RESISTOR		R9357	1-216-022-00	RES-CHIP 75 5% 1/10W		
1180		ULE	RESISTOR		R9358	1-216-815-11	METAL CHIP 330 5% 1/10W		
1181		ULE	RESISTOR		R9359	1-216-815-11	METAL CHIP 330 5% 1/10W		
1182		ULE	RESISTOR		R9360	1-216-815-11	METAL CHIP 330 5% 1/10W		
1183		ULE	RESISTOR		R9361	1-216-815-11	METAL CHIP 330 5% 1/10W		
1184		ULE	RESISTOR		R9362	1-218-285-11	METAL CHIP 75 5% 1/10W		
1185		ULE	RESISTOR		R9363	1-216-809-11	METAL CHIP 100 5% 1/10W		
1186		ULE	RESISTOR		R9364	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1187		ULE	RESISTOR		R9365	1-216-841-11	METAL CHIP 47K 5% 1/10W		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1188		ULE	RESISTOR		R9366	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1189		ULE	RESISTOR		R9367	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1190		ULE	RESISTOR		R9368	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1191		ULE	RESISTOR		R9369	1-216-809-11	METAL CHIP 100 5% 1/10W		
1192		ULE	RESISTOR		R9370	1-216-809-11	METAL CHIP 100 5% 1/10W		
1193		ULE	RESISTOR		R9371	1-216-809-11	METAL CHIP 100 5% 1/10W		
1194		ULE	RESISTOR		R9372	1-216-809-11	METAL CHIP 100 5% 1/10W		
1195		ULE	RESISTOR		R9373	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1196		ULE	RESISTOR		R9374	1-216-815-11	METAL CHIP 330 5% 1/10W		
1197		ULE	RESISTOR		R9375	1-216-815-11	METAL CHIP 330 5% 1/10W		
1198		ULE	RESISTOR		R9376	1-216-809-11	METAL CHIP 100 5% 1/10W		
1199		ULE	RESISTOR		R9377	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1200		ULE	RESISTOR		R9378	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1201		ULE	RESISTOR		R9379	1-216-809-11	METAL CHIP 100 5% 1/10W		
1202		ULE	RESISTOR		R9380	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1203		ULE	RESISTOR		R9381	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1204		ULE	RESISTOR		R9382	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1205		ULE	RESISTOR		R9383	1-216-809-11	METAL CHIP 100 5% 1/10W		
1206		ULE	RESISTOR		R9384	1-216-809-11	METAL CHIP 100 5% 1/10W		
1207		ULE	RESISTOR		R9393	1-216-813-11	METAL CHIP 220 5% 1/10W		
1208		ULE	RESISTOR		R9394	1-216-813-11	METAL CHIP 220 5% 1/10W		
1209		ULE	RESISTOR		R9396	1-216-809-11	METAL CHIP 100 5% 1/10W		
1210		ULE	RESISTOR		R9397	1-216-813-11	METAL CHIP 220 5% 1/10W		
1211		ULE	RESISTOR		R9398	1-218-285-11	METAL CHIP 75 5% 1/10W		
1212		ULE	RESISTOR		R9399	1-216-022-00	RES-CHIP 75 5% 1/10W		
1213		ULE	RESISTOR		R9400	1-216-815-11	METAL CHIP 330 5% 1/10W		
1214		ULE	RESISTOR		R9401	1-216-815-11	METAL CHIP 330 5% 1/10W		
1215		ULE	RESISTOR		R9402	1-216-815-11	METAL CHIP 330 5% 1/10W		
1216		ULE	RESISTOR		R9403	1-216-815-11	METAL CHIP 330 5% 1/10W		
1217		ULE	RESISTOR		R9404	1-216-809-11	METAL CHIP 100 5% 1/10W		
1218		ULE	RESISTOR		R9405	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1219		ULE	RESISTOR		R9406	1-216-809-11	METAL CHIP 100 5% 1/10W		
1220		ULE	RESISTOR		R9407	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1221		ULE	RESISTOR		R9408	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1222		ULE	RESISTOR		R9409	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1223		ULE	RESISTOR		R9410	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1224		ULE	RESISTOR		R9411	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1225		ULE	RESISTOR		R9412	1-216-809-11	METAL CHIP 100 5% 1/10W		
1226		ULE	RESISTOR		R9413	1-216-809-11	METAL CHIP 100 5% 1/10W		
1227		ULE	RESISTOR		R9414	1-216-809-11	METAL CHIP 100 5% 1/10W		
1228		ULE	RESISTOR		R9415	1-216-809-11	METAL CHIP 100 5% 1/10W		
1229		ULE	RESISTOR		R9416	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1230		ULE	RESISTOR		R9417	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1231		ULE	RESISTOR		R9418	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1232		ULE	RESISTOR		R9421	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1233		ULE	RESISTOR		R9422	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1234		ULE	RESISTOR		R9423	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1235		ULE	RESISTOR		R9424	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1236		ULE	RESISTOR		R9425	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1237		ULE	RESISTOR		R9426	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1238		ULE	RESISTOR		R9427	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1239		ULE	RESISTOR		R9428	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1240		ULE	RESISTOR		R9429	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1241		ULE	RESISTOR		R9430	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1242		ULE	RESISTOR		R9431	1-220-397-11	METAL CHIP 4.7M 5% 1/10W		
1243		ULE	RESISTOR		R9432	1-220-397-11	METAL CHIP 4.7M 5% 1/10W		
1244		ULE	RESISTOR		R9433	1-216-809-11	METAL CHIP 100 5% 1/10W		
1245		ULE	RESISTOR		R9434	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1246		ULE	RESISTOR		R9435	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1247		ULE	RESISTOR		R9436	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1248		ULE	RESISTOR		R9437	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1249		ULE	RESISTOR		R9438	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1250		ULE	RESISTOR		R9439	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1251		ULE	RESISTOR		R9440	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1252		ULE	RESISTOR		R9441	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1253		ULE	RESISTOR		R9442	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1254		ULE	RESISTOR		R9443	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1255		ULE	RESISTOR		R9444	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1256		ULE	RESISTOR		R9445	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1257		ULE	RESISTOR		R9446	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1258		ULE	RESISTOR		R9447	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1259		ULE	RESISTOR		R9448	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1260		ULE	RESISTOR		R9449	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1261		ULE	RESISTOR		R9450	1-216-821-11	METAL CHIP 1K 5% 1/10W		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1262		ULE	RESISTOR		R9451	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1263		ULE	RESISTOR		R9601	1-216-295-91	SHORT CHIP 0		
1264		ULE	RESISTOR		R9604	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1265		ULE	RESISTOR		R9605	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1266		ULE	RESISTOR		R9606	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1267		ULE	RESISTOR		R9607	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1268		ULE	RESISTOR		R9608	1-216-809-11	METAL CHIP 100 5% 1/10W		
1269		ULE	RESISTOR		R9609	1-216-809-11	METAL CHIP 100 5% 1/10W		
1270		ULE	RESISTOR		R9610	1-216-809-11	METAL CHIP 100 5% 1/10W		
1271		ULE	RESISTOR		R9611	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1272		ULE	RESISTOR		R9612	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1273		ULE	RESISTOR		R9613	1-216-809-11	METAL CHIP 100 5% 1/10W		
1274		ULE	RESISTOR		R9614	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1275		ULE	RESISTOR		R9615	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1276		ULE	RESISTOR		R9616	1-216-809-11	METAL CHIP 100 5% 1/10W		
1277		ULE	RESISTOR		R9617	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1278		ULE	RESISTOR		R9618	1-216-809-11	METAL CHIP 100 5% 1/10W		
1279		ULE	RESISTOR		R9619	1-216-809-11	METAL CHIP 100 5% 1/10W		
1280		ULE	RESISTOR		R9620	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1281		ULE	RESISTOR		R9621	1-216-817-11	METAL CHIP 470 5% 1/10W		
1282		ULE	RESISTOR		R9622	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1283		ULE	RESISTOR		R9624	1-216-817-11	METAL CHIP 470 5% 1/10W		
1284		ULE	RESISTOR		R9627	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1285		ULE	RESISTOR		R9628	1-216-809-11	METAL CHIP 100 5% 1/10W		
1286		ULE	RESISTOR		R9629	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1287		ULE	RESISTOR		R9630	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1288		ULE	RESISTOR		R9631	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1289		ULE	RESISTOR		R9632	1-216-817-11	METAL CHIP 470 5% 1/10W		
1290		ULE	RESISTOR		R9633	1-216-295-91	SHORT CHIP 0		
1291		ULE	RESISTOR		R9634	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1292		ULE	RESISTOR		R9635	1-216-295-91	SHORT CHIP 0		
1293		ULE	RESISTOR		R9637	1-216-818-11	METAL CHIP 560 5% 1/10W		
1294		ULE	RESISTOR		R9640	1-216-842-11	METAL CHIP 56K 5% 1/10W		
1295		ULE	RESISTOR		R9643	1-216-864-11	SHORT CHIP 0		
1296		ULE	RESISTOR		R9646	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1297		ULE	RESISTOR		R9648	1-216-864-11	SHORT CHIP 0		
1298		ULE	RESISTOR		R9649	1-218-835-11	METAL CHIP 330 0.5% 1/10W		
1299		ULE	RESISTOR		R9650	1-218-849-11	METAL CHIP 1.2K 0.5% 1/10W		
1300		ULE	RESISTOR		R9652	1-216-809-11	METAL CHIP 100 5% 1/10W		
1301		ULE	RESISTOR		R9653	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
1302		ULE	RESISTOR		R9654	1-218-853-11	METAL CHIP 1.8K 0.5% 1/10W		
1303		ULE	RESISTOR		R9656	1-216-817-11	METAL CHIP 470 5% 1/10W		
1304		ULE	RESISTOR		R9658	1-216-809-11	METAL CHIP 100 5% 1/10W		
1305		ULE	RESISTOR		R9659	1-216-809-11	METAL CHIP 100 5% 1/10W		
1306		ULE	RESISTOR		R9660	1-216-809-11	METAL CHIP 100 5% 1/10W		
1307		ULE	RESISTOR		R9661	1-216-809-11	METAL CHIP 100 5% 1/10W		
1308		ULE	RESISTOR		R9662	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
1309		ULE	RESISTOR		R9664	1-216-817-11	METAL CHIP 470 5% 1/10W		
1310		ULE	RESISTOR		R9667	1-216-864-11	SHORT CHIP 0		
1311		ULE	RESISTOR		R9668	1-216-864-11	SHORT CHIP 0		
1312		ULE	RESISTOR		R9669	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1313		ULE	RESISTOR		R9670	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1314		ULE	RESISTOR		R9671	1-216-813-11	METAL CHIP 220 5% 1/10W		
1315		ULE	RESISTOR		R9672	1-216-813-11	METAL CHIP 220 5% 1/10W		
1316		ULE	RESISTOR		R9673	1-216-813-11	METAL CHIP 220 5% 1/10W		
1317		ULE	RESISTOR		R9674	1-216-805-11	METAL CHIP 47 5% 1/10W		
1318		ULE	RESISTOR		R9675	1-216-864-11	SHORT CHIP 0		
1319		ULE	RESISTOR		R9676	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
1320		ULE	RESISTOR		R9677	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1321		ULE	RESISTOR		R9678	1-218-829-11	METAL CHIP 180 0.5% 1/10W		
1322		ULE	RESISTOR		R9680	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
1323		ULE	RESISTOR		R9681	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1324		ULE	RESISTOR		R9682	1-218-845-11	METAL CHIP 820 0.5% 1/10W		
1325		ULE	RESISTOR		R9684	1-218-849-11	METAL CHIP 1.2K 0.5% 1/10W		
1326		ULE	RESISTOR		R9685	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1327		ULE	RESISTOR		R9686	1-218-845-11	METAL CHIP 820 0.5% 1/10W		
1328		ULE	RESISTOR		R9688	1-218-851-11	METAL CHIP 1.5K 0.5% 1/10W		
1329		ULE	RESISTOR		R9689	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1330		ULE	RESISTOR		R9690	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1331		ULE	RESISTOR		R9691	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1332		ULE	RESISTOR		R9693	1-216-295-91	SHORT CHIP 0		
1333		ULE	RESISTOR		R9694	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1334		ULE	RESISTOR		R9695	1-216-809-11	METAL CHIP 100 5% 1/10W		
1335		ULE	RESISTOR		R9696	1-216-841-11	METAL CHIP 47K 5% 1/10W		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1336		ULE	RESISTOR		R9801	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
1337		ULE	RESISTOR		R9802	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
1338		ULE	RESISTOR		R9803	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
1339		ULE	RESISTOR		R9804	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
1340		ULE	RESISTOR		R9805	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
1341		ULE	RESISTOR		R9806	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
1342		ULE	RESISTOR		R9807	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1343		ULE	RESISTOR		R9808	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1344		ULE	RESISTOR		R9809	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1345		ULE	RESISTOR		R9810	1-216-809-11	METAL CHIP 100 5% 1/10W		
1346		ULE	RESISTOR		R9811	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1347		ULE	RESISTOR		R9812	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1348		ULE	RESISTOR		R9813	1-216-809-11	METAL CHIP 100 5% 1/10W		
1349		ULE	RESISTOR		R9814	1-216-809-11	METAL CHIP 100 5% 1/10W		
1350		ULE	RESISTOR		R9815	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1351		ULE	RESISTOR		R9816	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1352		ULE	RESISTOR		R9817	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1353		ULE	RESISTOR		R9818	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1354		ULE	RESISTOR		R9819	1-216-855-11	METAL CHIP 680K 5% 1/10W		
1355		ULE	RESISTOR		R9820	1-216-809-11	METAL CHIP 100 5% 1/10W		
1356		ULE	RESISTOR		R9821	1-216-809-11	METAL CHIP 100 5% 1/10W		
1357		ULE	RESISTOR		R9822	1-216-809-11	METAL CHIP 100 5% 1/10W		
1358		ULE	RESISTOR		R9823	1-218-881-11	METAL CHIP 27K 0.5% 1/10W		
1359		ULE	RESISTOR		R9824	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
1360		ULE	RESISTOR		R9825	1-216-855-11	METAL CHIP 680K 5% 1/10W		
1361		ULE	RESISTOR		R9826	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
1362		ULE	RESISTOR		R9827	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1363		ULE	RESISTOR		R9828	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1364		ULE	RESISTOR		R9829	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1365		ULE	RESISTOR		R9832	1-216-809-11	METAL CHIP 100 5% 1/10W		
1366		ULE	RESISTOR		R9833	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1367		ULE	RESISTOR		R9834	1-216-809-11	METAL CHIP 100 5% 1/10W		
1368		ULE	RESISTOR		R9837	1-216-809-11	METAL CHIP 100 5% 1/10W		
1369		ULE	RESISTOR		R9840	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1370		ULE	RESISTOR		R9849	1-216-809-11	METAL CHIP 100 5% 1/10W		
1371		ULE	RESISTOR		R9850	1-216-809-11	METAL CHIP 100 5% 1/10W		
1372		ULE	RESISTOR		R9858	1-216-809-11	METAL CHIP 100 5% 1/10W		
1373		ULE	RESISTOR		R9859	1-216-864-11	SHORT CHIP 0		
1374		ULE	RESISTOR		R9860	1-216-864-11	SHORT CHIP 0		
1375		ULE	RESISTOR		R9862	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1376		ULE	RESISTOR		R9864	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1377		ULE	RESISTOR		R9865	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1378		ULE	RESISTOR		R9866	1-216-809-11	METAL CHIP 100 5% 1/10W		
1379		ULE	RESISTOR		R9868	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1380		ULE	RESISTOR		R9869	1-216-809-11	METAL CHIP 100 5% 1/10W		
1381		ULE	RESISTOR		R9870	1-216-817-11	METAL CHIP 470 5% 1/10W		
1382		ULE	RESISTOR		R9872	1-218-285-11	METAL CHIP 75 5% 1/10W		
1383		ULE	RESISTOR		R9873	1-216-809-11	METAL CHIP 100 5% 1/10W		
1384		ULE	RESISTOR		R9874	1-216-809-11	METAL CHIP 100 5% 1/10W		
1385		ULE	RESISTOR		R9875	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1386		ULE	RESISTOR		R9876	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1387		ULE	RESISTOR		R9877	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1388		ULE	RESISTOR		R9878	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1389		ULE	RESISTOR		R9879	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1390		ULE	RESISTOR		R9880	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1391		ULE	RESISTOR		R9882	1-216-864-11	SHORT CHIP 0		
1392		ULE	RESISTOR		R9883	1-218-285-11	METAL CHIP 75 5% 1/10W		
1393		ULE	RESISTOR		R9884	1-216-809-11	METAL CHIP 100 5% 1/10W		
1394		ULE	RESISTOR		R9885	1-218-285-11	METAL CHIP 75 5% 1/10W		
1395		ULE	RESISTOR		R9886	1-216-809-11	METAL CHIP 100 5% 1/10W		
1396		ULE	RESISTOR		R9887	1-216-809-11	METAL CHIP 100 5% 1/10W		
1397		ULE	RESISTOR		R9888	1-216-809-11	METAL CHIP 100 5% 1/10W		
1398		ULE	RESISTOR		R9889	1-218-285-11	METAL CHIP 75 5% 1/10W		
1399		ULE	RESISTOR		R9890	1-218-285-11	METAL CHIP 75 5% 1/10W		
1400		ULE	RESISTOR		R9891	1-216-805-11	METAL CHIP 47 5% 1/10W		
1401		ULE	RESISTOR		R9892	1-216-805-11	METAL CHIP 47 5% 1/10W		
1402		ULE	RESISTOR		R9893	1-216-809-11	METAL CHIP 100 5% 1/10W		
1403		ULE	RESISTOR		R9894	1-216-809-11	METAL CHIP 100 5% 1/10W		
1404		ULE	RESISTOR		R9895	1-216-851-11	METAL CHIP 330K 5% 1/10W		
1405		ULE	RESISTOR		R9896	1-216-809-11	METAL CHIP 100 5% 1/10W		
1406		ULE	RESISTOR		R9897	1-216-809-11	METAL CHIP 100 5% 1/10W		
1407		ULE	RESISTOR		R9898	1-216-809-11	METAL CHIP 100 5% 1/10W		
1408		ULE	RESISTOR		R9899	1-216-817-11	METAL CHIP 470 5% 1/10W		
1409		ULE	RESISTOR		R9900	1-216-817-11	METAL CHIP 470 5% 1/10W		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1410		ULE	RESISTOR		R9902	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1411		ULE	RESISTOR		R9903	1-216-864-11	SHORT CHIP 0		
1412		ULE	RESISTOR		R9904	1-216-864-11	SHORT CHIP 0		
1413		ULE	RESISTOR		R9905	1-216-797-11	METAL CHIP 10 5% 1/10W		
1414		ULE	RESISTOR		R9906	1-211-985-11	METAL CHIP 47 0.5% 1/10W		
1415		ULE	RESISTOR		R9907	1-211-985-11	METAL CHIP 47 0.5% 1/10W		
1416		ULE	RESISTOR		R9908	1-211-985-11	METAL CHIP 47 0.5% 1/10W		
1417		ULE	RESISTOR		R9909	1-216-817-11	METAL CHIP 470 5% 1/10W		
1418		ULE	RESISTOR		R9910	1-216-817-11	METAL CHIP 470 5% 1/10W		
1419		ULE	RESISTOR		R9911	1-216-817-11	METAL CHIP 470 5% 1/10W		
1420		ULE	RESISTOR		R9912	1-216-805-11	METAL CHIP 47 5% 1/10W		
1421		ULE	RESISTOR		R9913	1-216-805-11	METAL CHIP 47 5% 1/10W		
1422		ULE	RESISTOR		R9914	1-216-805-11	METAL CHIP 47 5% 1/10W		
1423		ULE	RESISTOR		R9915	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1424		ULE	RESISTOR		R9916	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1425		ULE	RESISTOR		R9917	1-216-809-11	METAL CHIP 100 5% 1/10W		
1426		ULE	RESISTOR		R9918	1-216-809-11	METAL CHIP 100 5% 1/10W		
1427		ULE	RESISTOR		R9919	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1428		ULE	RESISTOR		R9920	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1429		ULE	RESISTOR		R9921	1-216-864-11	SHORT CHIP 0		
1430		ULE	RESISTOR		R9927	1-216-811-11	METAL CHIP 150 5% 1/10W		
1431		ULE	RESISTOR		R9928	1-216-811-11	METAL CHIP 150 5% 1/10W		
1432		ULE	RESISTOR		R9929	1-216-811-11	METAL CHIP 150 5% 1/10W		
1433		ULE	RESISTOR		R9930	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1434		ULE	RESISTOR		R9931	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1435		ULE	RESISTOR		R9932	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1436		ULE	RESISTOR		R9933	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1437		ULE	RESISTOR		R9934	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1438		ULE	RESISTOR		R9935	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1439		ULE	RESISTOR		R9936	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1440		ULE	RESISTOR		R9937	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1441		ULE	RESISTOR		R9938	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1442		ULE	SWITCH		S9301	1-786-760-11	SWITCH, TACTILE		
1443		ULE	TERMINAL		TB9401	1-537-712-11	TERMINAL, PUSH		
1444		ULE	VARISTOR		VD9313	1-801-925-21	VARISTOR, CHIP (1608)		
1445		ULE	VARISTOR		VD9314	1-801-925-21	VARISTOR, CHIP (1608)		
1446		ULE	VARISTOR		VD9401	1-803-974-21	VARISTOR, CHIP (1608)		
1447		ULE	VARISTOR		VD9402	1-803-974-21	VARISTOR, CHIP (1608)		
1448		ULE	VARISTOR		VD9403	1-803-974-21	VARISTOR, CHIP (1608)		
1449		ULE	VARISTOR		VD9404	1-803-974-21	VARISTOR, CHIP (1608)		
1450		ULE	CRYSTAL		X9801	1-781-914-21	VIBRATOR, CRYSTAL		
1451		ULE	CRYSTAL		X9802	1-795-214-21	VIBRATOR, CERAMIC (4MHZ)		
1452		BL	CAPACITOR		C1001	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1453		BL	CAPACITOR		C1002	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1454		BL	CAPACITOR		C1003	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1455		BL	CAPACITOR		C1004	1-164-947-11	CERAMIC CHIP 0.01UF 50V		
1456		BL	CAPACITOR		C1005	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1457		BL	CAPACITOR		C1006	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1458		BL	CAPACITOR		C1011	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1459		BL	CAPACITOR		C1012	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1460		BL	CAPACITOR		C1014	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1461		BL	CAPACITOR		C1015	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1462		BL	CAPACITOR		C1016	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
1463		BL	CAPACITOR		C1017	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1464		BL	CAPACITOR		C1018	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1465		BL	CAPACITOR		C1019	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1466		BL	CAPACITOR		C1020	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1467		BL	CAPACITOR		C1021	1-162-917-11	CERAMIC CHIP 15PF 5.00% 50V		
1468		BL	CAPACITOR		C1022	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1469		BL	CAPACITOR		C1023	1-162-917-11	CERAMIC CHIP 15PF 5.00% 50V		
1470		BL	CAPACITOR		C1024	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1471		BL	CAPACITOR		C1025	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1472		BL	CAPACITOR		C1027	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1473		BL	CAPACITOR		C1029	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1474		BL	CAPACITOR		C1030	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1475		BL	CAPACITOR		C1031	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1476		BL	CAPACITOR		C1032	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1477		BL	CAPACITOR		C1033	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1478		BL	CAPACITOR		C1034	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1479		BL	CAPACITOR		C1035	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
1480		BL	CAPACITOR		C1037	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1481		BL	CAPACITOR		C1039	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1482		BL	CAPACITOR		C1041	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1483		BL	CAPACITOR		C1042	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		

No.	#	Board	Type	$\Delta/\%$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1484		BL	CAPACITOR		C1043	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1485		BL	CAPACITOR		C2001	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1486		BL	CAPACITOR		C2002	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1487		BL	CAPACITOR		C2004	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1488		BL	CAPACITOR		C2005	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1489		BL	CAPACITOR		C2011	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1490		BL	CAPACITOR		C2012	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1491		BL	CAPACITOR		C2024	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1492		BL	CAPACITOR		C2025	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1493		BL	CAPACITOR		C2027	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1494		BL	CAPACITOR		C2028	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1495		BL	CAPACITOR		C2030	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1496		BL	CAPACITOR		C2031	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1497		BL	CAPACITOR		C2032	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
1498		BL	CAPACITOR		C2033	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
1499		BL	CAPACITOR		C2034	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
1500		BL	CAPACITOR		C2035	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1501		BL	CAPACITOR		C2036	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1502		BL	CAPACITOR		C2037	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
1503		BL	CAPACITOR		C2038	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
1504		BL	CAPACITOR		C2039	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1505		BL	CAPACITOR		C2040	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1506		BL	CAPACITOR		C2041	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1507		BL	CAPACITOR		C2042	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1508		BL	CAPACITOR		C2043	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1509		BL	CAPACITOR		C2044	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1510		BL	CAPACITOR		C2045	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1511		BL	CAPACITOR		C2046	1-107-726-91	CERAMIC CHIP 0.01UF 10.00% 16V		
1512		BL	CAPACITOR		C2047	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1513		BL	CAPACITOR		C2048	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1514		BL	CAPACITOR		C2049	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1515		BL	CAPACITOR		C2050	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1516		BL	CAPACITOR		C2051	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1517		BL	CAPACITOR		C2052	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1518		BL	CAPACITOR		C2053	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1519		BL	CAPACITOR		C2054	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1520		BL	CAPACITOR		C2055	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1521		BL	CAPACITOR		C2056	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1522		BL	CAPACITOR		C2057	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1523		BL	CAPACITOR		C2058	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1524		BL	CAPACITOR		C2059	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1525		BL	CAPACITOR		C2060	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1526		BL	CAPACITOR		C2061	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1527		BL	CAPACITOR		C2062	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1528		BL	CAPACITOR		C2063	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1529		BL	CAPACITOR		C2064	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1530		BL	CAPACITOR		C2065	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1531		BL	CAPACITOR		C2066	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1532		BL	CAPACITOR		C2067	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1533		BL	CAPACITOR		C2068	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1534		BL	CAPACITOR		C2069	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1535		BL	CAPACITOR		C2070	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1536		BL	CAPACITOR		C2071	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1537		BL	CAPACITOR		C2072	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1538		BL	CAPACITOR		C2073	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1539		BL	CAPACITOR		C2074	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1540		BL	CAPACITOR		C2075	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1541		BL	CAPACITOR		C2076	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1542		BL	CAPACITOR		C2077	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1543		BL	CAPACITOR		C2078	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1544		BL	CAPACITOR		C2079	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1545		BL	CAPACITOR		C2080	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1546		BL	CAPACITOR		C2081	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1547		BL	CAPACITOR		C2082	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1548		BL	CAPACITOR		C2083	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1549		BL	CAPACITOR		C2084	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1550		BL	CAPACITOR		C2085	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1551		BL	CAPACITOR		C2086	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1552		BL	CAPACITOR		C2087	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1553		BL	CAPACITOR		C2088	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1554		BL	CAPACITOR		C2089	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1555		BL	CAPACITOR		C2090	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1556		BL	CAPACITOR		C2092	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1557		BL	CAPACITOR		C2093	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1558		BL	CAPACITOR		C2094	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1559		BL	CAPACITOR		C2095	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1560		BL	CAPACITOR		C2097	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1561		BL	CAPACITOR		C2098	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1562		BL	CAPACITOR		C2099	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1563		BL	CAPACITOR		C2101	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1564		BL	CAPACITOR		C2102	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1565		BL	CAPACITOR		C2103	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1566		BL	CAPACITOR		C2104	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1567		BL	CAPACITOR		C2105	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1568		BL	CAPACITOR		C2106	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1569		BL	CAPACITOR		C2107	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1570		BL	CAPACITOR		C2108	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1571		BL	CAPACITOR		C2109	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1572		BL	CAPACITOR		C2110	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1573		BL	CAPACITOR		C3001	1-119-667-11	CERAMIC CHIP 22UF 10V		
1574		BL	CAPACITOR		C3002	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1575		BL	CAPACITOR		C3003	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1576		BL	CAPACITOR		C3004	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
1577		BL	CAPACITOR		C3005	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1578		BL	CAPACITOR		C3006	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1579		BL	CAPACITOR		C3007	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1580		BL	CAPACITOR		C3008	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1581		BL	CAPACITOR		C3009	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1582		BL	CAPACITOR		C3010	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1583		BL	CAPACITOR		C3011	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1584		BL	CAPACITOR		C3012	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1585		BL	CAPACITOR		C3013	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1586		BL	CAPACITOR		C3014	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1587		BL	CAPACITOR		C3015	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1588		BL	CAPACITOR		C3016	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1589		BL	CAPACITOR		C3017	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1590		BL	CAPACITOR		C3018	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1591		BL	CAPACITOR		C3019	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1592		BL	CAPACITOR		C3020	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1593		BL	CAPACITOR		C3021	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1594		BL	CAPACITOR		C3022	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1595		BL	CAPACITOR		C3023	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1596		BL	CAPACITOR		C3024	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1597		BL	CAPACITOR		C3025	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1598		BL	CAPACITOR		C3026	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1599		BL	CAPACITOR		C3027	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1600		BL	CAPACITOR		C3028	1-119-667-11	CERAMIC CHIP 22UF 10V		
1601		BL	CAPACITOR		C3029	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1602		BL	CAPACITOR		C3030	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1603		BL	CAPACITOR		C3031	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1604		BL	CAPACITOR		C3032	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1605		BL	CAPACITOR		C3033	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1606		BL	CAPACITOR		C3034	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1607		BL	CAPACITOR		C3035	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1608		BL	CAPACITOR		C3036	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1609		BL	CAPACITOR		C3037	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1610		BL	CAPACITOR		C3038	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1611		BL	CAPACITOR		C3039	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1612		BL	CAPACITOR		C3040	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1613		BL	CAPACITOR		C3041	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1614		BL	CAPACITOR		C3042	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1615		BL	CAPACITOR		C3043	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1616		BL	CAPACITOR		C3044	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1617		BL	CAPACITOR		C3045	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1618		BL	CAPACITOR		C3046	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
1619		BL	CAPACITOR		C3047	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1620		BL	CAPACITOR		C3049	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1621		BL	CAPACITOR		C3050	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1622		BL	CAPACITOR		C3051	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
1623		BL	CAPACITOR		C3052	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
1624		BL	CAPACITOR		C3053	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
1625		BL	CAPACITOR		C3054	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
1626		BL	CAPACITOR		C3055	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
1627		BL	CAPACITOR		C3056	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
1628		BL	CAPACITOR		C3057	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
1629		BL	CAPACITOR		C4001	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
1630		BL	CAPACITOR		C4002	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
1631		BL	CAPACITOR		C4003	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1632		BL	CAPACITOR		C4004	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1633		BL	CAPACITOR		C4005	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1634		BL	CAPACITOR		C4006	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1635		BL	CAPACITOR		C4007	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1636		BL	CAPACITOR		C4008	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1637		BL	CAPACITOR		C4009	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1638		BL	CAPACITOR		C4010	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
1639		BL	CAPACITOR		C4011	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1640		BL	CAPACITOR		C4012	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1641		BL	CAPACITOR		C4013	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1642		BL	CAPACITOR		C4014	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1643		BL	CAPACITOR		C4015	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1644		BL	CAPACITOR		C4016	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1645		BL	CAPACITOR		C4017	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1646		BL	CAPACITOR		C4018	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1647		BL	CAPACITOR		C4019	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1648		BL	CAPACITOR		C4020	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1649		BL	CAPACITOR		C4021	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1650		BL	CAPACITOR		C4022	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1651		BL	CAPACITOR		C4023	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1652		BL	CAPACITOR		C4024	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1653		BL	CAPACITOR		C4025	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1654		BL	CAPACITOR		C4026	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1655		BL	CAPACITOR		C4027	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1656		BL	CAPACITOR		C4028	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1657		BL	CAPACITOR		C4030	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1658		BL	CAPACITOR		C4031	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1659		BL	CAPACITOR		C4032	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1660		BL	CAPACITOR		C4033	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1661		BL	CAPACITOR		C4034	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1662		BL	CAPACITOR		C4035	1-162-908-11	CERAMIC CHIP 3PF 0.25PF 50V		
1663		BL	CAPACITOR		C4036	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1664		BL	CAPACITOR		C4037	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1665		BL	CAPACITOR		C4038	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1666		BL	CAPACITOR		C4039	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1667		BL	CAPACITOR		C4040	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1668		BL	CAPACITOR		C4501	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1669		BL	CAPACITOR		C4502	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1670		BL	CAPACITOR		C4503	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1671		BL	CAPACITOR		C4504	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1672		BL	CAPACITOR		C4505	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1673		BL	CAPACITOR		C4506	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1674		BL	CAPACITOR		C4507	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1675		BL	CAPACITOR		C4508	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1676		BL	CAPACITOR		C4509	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1677		BL	CAPACITOR		C4510	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1678		BL	CAPACITOR		C4511	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1679		BL	CAPACITOR		C4512	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1680		BL	CAPACITOR		C4513	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1681		BL	CAPACITOR		C4514	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1682		BL	CAPACITOR		C4515	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1683		BL	CAPACITOR		C4516	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1684		BL	CAPACITOR		C4517	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1685		BL	CAPACITOR		C4518	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1686		BL	CAPACITOR		C4519	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1687		BL	CAPACITOR		C4520	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1688		BL	CAPACITOR		C4521	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1689		BL	CAPACITOR		C4522	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1690		BL	CAPACITOR		C4523	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
1691		BL	CAPACITOR		C4524	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V		
1692		BL	CAPACITOR		C4525	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1693		BL	CAPACITOR		C4526	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1694		BL	CAPACITOR		C4527	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1695		BL	CAPACITOR		C4528	1-162-915-11	CERAMIC CHIP 10PF 0.50PF 50V		
1696		BL	CAPACITOR		C4529	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1697		BL	CAPACITOR		C4530	1-162-910-11	CERAMIC CHIP 5PF 0.25PF 50V		
1698		BL	CAPACITOR		C4531	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
1699		BL	CAPACITOR		C4532	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1700		BL	CAPACITOR		C4533	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1701		BL	CAPACITOR		C4535	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1702		BL	CAPACITOR		C4536	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1703		BL	CAPACITOR		C4537	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1704		BL	CAPACITOR		C4538	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1705		BL	CAPACITOR		C4539	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		

No.	#	Board	Type	Δ/\ast	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1706		BL	CAPACITOR		C4540	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1707		BL	CAPACITOR		C4541	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1708		BL	CAPACITOR		C4542	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1709		BL	CAPACITOR		C4543	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1710		BL	CAPACITOR		C4544	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1711		BL	CAPACITOR		C4545	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1712		BL	CAPACITOR		C4546	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1713		BL	CAPACITOR		C4547	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1714		BL	CAPACITOR		C4548	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1715		BL	CAPACITOR		C4549	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1716		BL	CAPACITOR		C4550	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1717		BL	CAPACITOR		C4551	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1718		BL	CAPACITOR		C4552	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1719		BL	CAPACITOR		C4553	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1720		BL	CAPACITOR		C4554	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1721		BL	CAPACITOR		C4555	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1722		BL	CAPACITOR		C4556	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1723		BL	CAPACITOR		C4557	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1724		BL	CAPACITOR		C4558	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1725		BL	CAPACITOR		C4559	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1726		BL	CAPACITOR		C4560	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1727		BL	CAPACITOR		C4561	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1728		BL	CAPACITOR		C4562	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1729		BL	CAPACITOR		C4563	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1730		BL	CAPACITOR		C4564	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1731		BL	CAPACITOR		C4565	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1732		BL	CAPACITOR		C4566	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1733		BL	CAPACITOR		C4567	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1734		BL	CAPACITOR		C4568	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1735		BL	CAPACITOR		C4569	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1736		BL	CAPACITOR		C4570	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1737		BL	CAPACITOR		C4571	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1738		BL	CAPACITOR		C4572	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1739		BL	CAPACITOR		C4573	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1740		BL	CAPACITOR		C4574	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1741		BL	CAPACITOR		C4575	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1742		BL	CAPACITOR		C4576	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1743		BL	CAPACITOR		C4577	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1744		BL	CAPACITOR		C4578	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1745		BL	CAPACITOR		C4579	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1746		BL	CAPACITOR		C4580	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1747		BL	CAPACITOR		C4581	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1748		BL	CAPACITOR		C4582	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1749		BL	CAPACITOR		C4583	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1750		BL	CAPACITOR		C4584	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1751		BL	CAPACITOR		C4585	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1752		BL	CAPACITOR		C4586	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1753		BL	CAPACITOR		C4587	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1754		BL	CAPACITOR		C4588	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1755		BL	CAPACITOR		C4589	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
1756		BL	CAPACITOR		C4590	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1757		BL	CAPACITOR		C4591	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1758		BL	CAPACITOR		C4592	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
1759		BL	CAPACITOR		C4593	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
1760		BL	CAPACITOR		C4594	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1761		BL	CAPACITOR		C4595	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1762		BL	CAPACITOR		C4596	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
1763		BL	CAPACITOR		C4597	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1764		BL	CAPACITOR		C4598	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1765		BL	CAPACITOR		C4599	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1766		BL	CONNECTOR	*	CN1001	1-817-754-11	CONNECTOR, BOARD TO BOARD 100P		
1767		BL	CONNECTOR		CN1002	1-779-936-21	CONNECTOR, FFC/FPC 18P		
1768		BL	CONNECTOR	*	CN1003	1-793-807-21	PIN, CONNECTOR (WITH PWB) 20P		
1769		BL	CONNECTOR		CN1004	1-573-290-21	PIN, CONNECTOR (1.5MM) (SMD)4P		
1770		BL	CONNECTOR	*	CN1006	1-779-268-21	PIN, CONNECTOR (1.5MM)(SMD)11P		
1771		BL	CONNECTOR	*	CN4001	1-785-306-21	CONNECTOR, BOARD TO BOARD70P		
1772		BL	DIODE		D1002	8-719-036-94	DIODE RD5.6SB-T1		
1773		BL	DIODE		D1003	8-719-036-94	DIODE RD5.6SB-T1		
1774		BL	DIODE		D1005	8-719-077-59	DIODE 1PS302		
1775		BL	DIODE		D1006	8-719-024-77	DIODE HN1D03FU-TE85L		
1776		BL	DIODE		D1007	8-719-036-94	DIODE RD5.6SB-T1		
1777		BL	DIODE		D1008	8-719-036-94	DIODE RD5.6SB-T1		
1778		BL	DIODE		D1011	8-719-081-97	DIODE MMDL914T1		
1779		BL	DIODE		D1012	8-719-081-97	DIODE MMDL914T1		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1780		BL	DIODE		D4002	8-719-081-97	DIODE MMDL914T1		
1781		BL	DIODE		D4003	8-719-081-97	DIODE MMDL914T1		
1782		BL	DIODE		D4004	8-719-081-97	DIODE MMDL914T1		
1783		BL	DIODE		D4005	8-719-066-11	DIODE 1PS184-115		
1784		BL	DIODE		D4006	8-719-066-11	DIODE 1PS184-115		
1785		BL	FERRITE BEAD		FB1001	1-414-445-11	FERRITE 0UH		
1786		BL	FERRITE BEAD		FB1002	1-414-445-11	FERRITE 0UH		
1787		BL	FERRITE BEAD		FB2001	1-414-234-22	FERRITE 0UH		
1788		BL	FERRITE BEAD		FB3001	1-414-445-11	FERRITE 0UH		
1789		BL	FERRITE BEAD		FB3002	1-414-864-11	FERRITE 0UH		
1790		BL	FERRITE BEAD		FB3003	1-414-445-11	FERRITE 0UH		
1791		BL	FERRITE BEAD		FB3004	1-414-445-11	FERRITE 0UH		
1792		BL	FERRITE BEAD		FB3005	1-414-445-11	FERRITE 0UH		
1793		BL	FERRITE BEAD		FB4001	1-414-445-11	FERRITE 0UH		
1794		BL	FERRITE BEAD		FB4002	1-414-445-11	FERRITE 0UH		
1795		BL	FERRITE BEAD		FB4003	1-414-445-11	FERRITE 0UH		
1796		BL	FERRITE BEAD		FB4004	1-414-445-11	FERRITE 0UH		
1797		BL	FERRITE BEAD		FB4005	1-414-445-11	FERRITE 0UH		
1798		BL	FERRITE BEAD		FB4006	1-414-445-11	FERRITE 0UH		
1799		BL	FERRITE BEAD		FB4007	1-414-445-11	FERRITE 0UH		
1800		BL	FERRITE BEAD		FB4008	1-414-445-11	FERRITE 0UH		
1801		BL	FERRITE BEAD		FB4009	1-414-445-11	FERRITE 0UH		
1802		BL	FERRITE BEAD		FB4010	1-414-864-11	FERRITE 0UH		
1803		BL	FERRITE BEAD		FB4011	1-414-864-11	FERRITE 0UH		
1804		BL	FERRITE BEAD		FB4012	1-414-864-11	FERRITE 0UH		
1805		BL	FERRITE BEAD		FB4013	1-414-864-11	FERRITE 0UH		
1806		BL	FERRITE BEAD		FB4501	1-414-864-11	FERRITE 0UH		
1807		BL	FERRITE BEAD		FB4502	1-414-864-11	FERRITE 0UH		
1808		BL	FERRITE BEAD		FB4503	1-414-445-11	FERRITE 0UH		
1809		BL	FERRITE BEAD		FB4504	1-414-445-11	FERRITE 0UH		
1810		BL	FERRITE BEAD		FB4505	1-414-445-11	FERRITE 0UH		
1811		BL	FERRITE BEAD		FB4506	1-414-445-11	FERRITE 0UH		
1812		BL	FERRITE BEAD		FB4507	1-414-864-11	FERRITE 0UH		
1813		BL	FILTER		FL2001	1-234-560-21	FILTER, LOW PASS		
1814		BL	FILTER		FL2002	1-234-559-21	FILTER, LOW PASS		
1815		BL	FILTER		FL2003	1-234-559-21	FILTER, LOW PASS		
1816		BL	FILTER		FL2004	1-234-177-21	FERRITE 0UH		
1817		BL	FILTER		FL2005	1-234-177-21	FERRITE 0UH		
1818		BL	FILTER		FL2006	1-234-177-21	FERRITE 0UH		
1819		BL	FILTER		FL2007	1-234-677-21	FILTER, EMI		
1820		BL	FILTER		FL2008	1-234-177-21	FERRITE 0UH		
1821		BL	FILTER		FL3001	1-234-177-21	FERRITE 0UH		
1822		BL	FILTER		FL3002	1-234-177-21	FERRITE 0UH		
1823		BL	FILTER		FL3003	1-234-177-21	FERRITE 0UH		
1824		BL	FILTER		FL3004	1-234-177-21	FERRITE 0UH		
1825		BL	FILTER		FL4001	1-234-177-21	FERRITE 0UH		
1826		BL	FILTER		FL4501	1-234-177-21	FERRITE 0UH		
1827		BL	FILTER		FL4502	1-234-177-21	FERRITE 0UH		
1828		BL	IC		IC1001	8-759-460-72	IC BA033FP-E2		
1829		BL	IC		IC1002	6-804-642-01	IC HD64F2376-268A		
1830		BL	IC		IC1003	6-703-225-01	IC S-80928CNMC-G8YT2G		
1831		BL	IC		IC1004	6-702-688-01	IC M24C64-WMN6T(B)		
1832		BL	IC		IC1005	8-759-549-03	IC SN74LV132APWR		
1833		BL	IC		IC1006	8-759-592-49	IC TC7SZ125FU(TE85R)		
1834		BL	IC		IC1007	8-759-476-80	IC LM75CIMX-3		
1835		BL	IC		IC2001	6-705-529-01	IC LMH6658MMX/J5000172		
1836		BL	IC		IC2002	6-705-529-01	IC LMH6658MMX/J5000172		
1837		BL	IC		IC2004	8-759-712-65	IC PQ070XZ01ZP		
1838		BL	IC		IC2005	8-759-712-65	IC PQ070XZ01ZP		
1839		BL	IC		IC2006	8-752-425-02	IC CXD3802BQ		
1840		BL	IC		IC2007	6-706-155-01	IC MT48LC2M32B2P-6-Y14W		
1841		BL	IC		IC3001	6-700-227-01	IC MM1561JFBE		
1842		BL	IC		IC3002	8-752-422-52	IC CXD2097BQ		
1843		BL	IC		IC3003	6-703-791-01	IC MSM56V16160F-8T3FM1		
1844		BL	IC		IC3004	8-759-669-78	IC TLC2933IPWR-12		
1845		BL	IC		IC4001	6-804-641-01	IC MX29LV800TTC-70G-268A		
1846		BL	IC		IC4002	8-759-549-03	IC SN74LV132APWR		
1847		BL	IC		IC4003	8-759-712-65	IC PQ070XZ01ZP		
1848		BL	IC		IC4004	8-759-712-65	IC PQ070XZ01ZP		
1849		BL	IC		IC4005	6-704-191-01	IC S-80829CNNB-B8OT2G		
1850		BL	IC		IC4006	6-704-192-01	IC S-80822CNNB-B8HT2G		
1851		BL	IC		IC4007	6-706-362-01	IC PW166B-10TL		
1852		BL	IC		IC4009	6-704-190-01	IC SN74ALVCH16823DGGR		
1853		BL	IC		IC4010	8-759-669-44	IC SN74LVC74APWR-12		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1854		BL	IC		IC4501	8-759-676-70	IC MSM56V16160F-10TS-K		
1855		BL	IC		IC4502	6-703-689-01	IC CXD9756R		
1856		BL	IC		IC4503	6-700-394-01	IC BA25BC0FP-E2		
1857		BL	IC		IC4504	6-701-098-11	IC THC63LVDM83R-T		
1858		BL	COIL		L1001	1-412-030-11	INDUCTOR 22UH		
1859		BL	COIL		L2001	1-469-525-91	INDUCTOR 10UH		
1860		BL	COIL		L2003	1-469-525-91	INDUCTOR 10UH		
1861		BL	COIL		L2004	1-412-026-11	INDUCTOR 1UH		
1862		BL	COIL		L2006	1-412-026-11	INDUCTOR 1UH		
1863		BL	COIL		L2007	1-469-525-91	INDUCTOR 10UH		
1864		BL	COIL		L2008	1-469-525-91	INDUCTOR 10UH		
1865		BL	COIL		L2009	1-412-029-11	INDUCTOR 10UH		
1866		BL	COIL		L2010	1-469-525-91	INDUCTOR 10UH		
1867		BL	COIL		L3001	1-469-525-91	INDUCTOR 10UH		
1868		BL	COIL		L3002	1-469-528-91	INDUCTOR 100UH		
1869		BL	COIL		L3003	1-469-528-91	INDUCTOR 100UH		
1870		BL	COIL		L4501	1-456-583-11	INDUCTOR 0UH		
1871		BL	COIL		L4502	1-456-583-11	INDUCTOR 0UH		
1872		BL	COIL		L4503	1-456-583-11	INDUCTOR 0UH		
1873		BL	COIL		L4504	1-456-583-11	INDUCTOR 0UH		
1874		BL	COIL		L4505	1-456-583-11	INDUCTOR 0UH		
1875		BL	TRANSISTOR		Q1001	8-729-025-28	TRANSISTOR 2SK1828		
1876		BL	TRANSISTOR		Q1002	8-729-025-28	TRANSISTOR 2SK1828		
1877		BL	TRANSISTOR		Q1003	8-729-907-00	TRANSISTOR DTC114EU		
1878		BL	TRANSISTOR		Q1004	8-729-907-00	TRANSISTOR DTC114EU		
1879		BL	TRANSISTOR		Q1007	8-729-013-28	TRANSISTOR HN1B01FU-TE85R		
1880		BL	TRANSISTOR		Q1010	8-729-025-28	TRANSISTOR 2SK1828		
1881		BL	TRANSISTOR		Q1011	8-729-025-28	TRANSISTOR 2SK1828		
1882		BL	TRANSISTOR		Q2001	8-729-117-73	TRANSISTOR 2SC4178-F14		
1883		BL	TRANSISTOR		Q2002	8-729-117-73	TRANSISTOR 2SC4178-F14		
1884		BL	TRANSISTOR		Q2003	8-729-117-73	TRANSISTOR 2SC4178-F14		
1885		BL	TRANSISTOR		Q2004	8-729-122-63	TRANSISTOR 2SA1226-E4		
1886		BL	TRANSISTOR		Q2005	8-729-122-63	TRANSISTOR 2SA1226-E4		
1887		BL	TRANSISTOR		Q2006	8-729-122-63	TRANSISTOR 2SA1226-E4		
1888		BL	TRANSISTOR		Q2007	6-550-585-01	TRANSISTOR 2PC4081R-115		
1889		BL	TRANSISTOR		Q2008	8-729-117-73	TRANSISTOR 2SC4178-F14		
1890		BL	TRANSISTOR		Q2009	8-729-117-73	TRANSISTOR 2SC4178-F14		
1891		BL	TRANSISTOR		Q2012	8-729-010-25	TRANSISTOR MSD601-RT1		
1892		BL	TRANSISTOR		Q3002	6-550-586-01	TRANSISTOR 2PA1576R-115		
1893		BL	TRANSISTOR		Q3003	6-550-585-01	TRANSISTOR 2PC4081R-115		
1894		BL	TRANSISTOR		Q4501	6-550-014-01	TRANSISTOR SSM6N15FU(TE85R)		
1895		BL	TRANSISTOR		Q4502	8-729-028-86	TRANSISTOR DTA143EUA-T106		
1896		BL	TRANSISTOR		Q4503	8-729-907-00	TRANSISTOR DTC114EU		
1897		BL	TRANSISTOR		Q4504	8-729-907-00	TRANSISTOR DTC114EU		
1898		BL	TRANSISTOR		Q4505	8-729-046-75	TRANSISTOR SI2301DS-T1		
1899		BL	RESISTOR		R1001	1-218-990-11	SHORT CHIP 0		
1900		BL	RESISTOR		R1002	1-216-296-11	SHORT CHIP 0		
1901		BL	RESISTOR		R1003	1-216-296-11	SHORT CHIP 0		
1902		BL	RESISTOR		R1004	1-216-296-11	SHORT CHIP 0		
1903		BL	RESISTOR		R1005	1-218-990-11	SHORT CHIP 0		
1904		BL	RESISTOR		R1006	1-218-990-11	SHORT CHIP 0		
1905		BL	RESISTOR		R1008	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1906		BL	RESISTOR		R1009	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1907		BL	RESISTOR		R1010	1-218-990-11	SHORT CHIP 0		
1908		BL	RESISTOR		R1011	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1909		BL	RESISTOR		R1012	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1910		BL	RESISTOR		R1013	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1911		BL	RESISTOR		R1014	1-218-971-11	RES-CHIP 33K 5% 1/16W		
1912		BL	RESISTOR		R1015	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1913		BL	RESISTOR		R1016	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1914		BL	RESISTOR		R1017	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1915		BL	RESISTOR		R1018	1-216-864-11	SHORT CHIP 0		
1916		BL	RESISTOR		R1019	1-218-724-11	METAL CHIP 22K 0.5% 1/10W		
1917		BL	RESISTOR		R1020	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
1918		BL	RESISTOR		R1021	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1919		BL	RESISTOR		R1023	1-220-183-81	RES-CHIP 1.1K 5% 1/16W		
1920		BL	RESISTOR		R1024	1-216-864-11	SHORT CHIP 0		
1921		BL	RESISTOR		R1025	1-216-864-11	SHORT CHIP 0		
1922		BL	RESISTOR		R1026	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1923		BL	RESISTOR		R1027	1-218-941-81	RES-CHIP 100 5% 1/16W		
1924		BL	RESISTOR		R1028	1-218-941-81	RES-CHIP 100 5% 1/16W		
1925		BL	RESISTOR		R1029	1-218-941-81	RES-CHIP 100 5% 1/16W		
1926		BL	RESISTOR		R1031	1-218-941-81	RES-CHIP 100 5% 1/16W		
1927		BL	RESISTOR		R1032	1-218-941-81	RES-CHIP 100 5% 1/16W		

No.	#	Board	Type	Δ / $^{\circ}$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1928		BL	RESISTOR		R1033	1-218-941-81	RES-CHIP 100 5% 1/16W		
1929		BL	RESISTOR		R1034	1-218-941-81	RES-CHIP 100 5% 1/16W		
1930		BL	RESISTOR		R1035	1-218-941-81	RES-CHIP 100 5% 1/16W		
1931		BL	RESISTOR		R1037	1-216-809-11	METAL CHIP 100 5% 1/10W		
1932		BL	RESISTOR		R1038	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1933		BL	RESISTOR		R1039	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1934		BL	RESISTOR		R1040	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1935		BL	RESISTOR		R1041	1-218-941-81	RES-CHIP 100 5% 1/16W		
1936		BL	RESISTOR		R1042	1-218-941-81	RES-CHIP 100 5% 1/16W		
1937		BL	RESISTOR		R1043	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1938		BL	RESISTOR		R1045	1-218-990-11	SHORT CHIP 0		
1939		BL	RESISTOR		R1046	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1940		BL	RESISTOR		R1047	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1941		BL	RESISTOR		R1049	1-218-990-11	SHORT CHIP 0		
1942		BL	RESISTOR		R1050	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
1943		BL	RESISTOR		R1051	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1944		BL	RESISTOR		R1052	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1945		BL	RESISTOR		R1053	1-208-635-11	METAL CHIP 10 0.5% 1/16W		
1946		BL	RESISTOR		R1054	1-218-990-11	SHORT CHIP 0		
1947		BL	RESISTOR		R1055	1-218-945-11	RES-CHIP 220 5% 1/16W		
1948		BL	RESISTOR		R1056	1-218-945-11	RES-CHIP 220 5% 1/16W		
1949		BL	RESISTOR		R1057	1-218-945-11	RES-CHIP 220 5% 1/16W		
1950		BL	RESISTOR		R1058	1-218-990-11	SHORT CHIP 0		
1951		BL	RESISTOR		R1061	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1952		BL	RESISTOR		R1062	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1953		BL	RESISTOR		R1063	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1954		BL	RESISTOR		R1064	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1955		BL	RESISTOR		R1065	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1956		BL	RESISTOR		R1066	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1957		BL	RESISTOR		R1067	1-216-864-11	SHORT CHIP 0		
1958		BL	RESISTOR		R1068	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1959		BL	RESISTOR		R1069	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
1960		BL	RESISTOR		R1070	1-218-941-81	RES-CHIP 100 5% 1/16W		
1961		BL	RESISTOR		R1071	1-218-941-81	RES-CHIP 100 5% 1/16W		
1962		BL	RESISTOR		R1072	1-216-809-11	METAL CHIP 100 5% 1/10W		
1963		BL	RESISTOR		R1073	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1964		BL	RESISTOR		R1074	1-218-941-81	RES-CHIP 100 5% 1/16W		
1965		BL	RESISTOR		R1075	1-218-941-81	RES-CHIP 100 5% 1/16W		
1966		BL	RESISTOR		R1077	1-216-864-11	SHORT CHIP 0		
1967		BL	RESISTOR		R1078	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1968		BL	RESISTOR		R1079	1-216-864-11	SHORT CHIP 0		
1969		BL	RESISTOR		R1080	1-216-864-11	SHORT CHIP 0		
1970		BL	RESISTOR		R1081	1-216-818-11	METAL CHIP 560 5% 1/10W		
1971		BL	RESISTOR		R1082	1-216-813-11	METAL CHIP 220 5% 1/10W		
1972		BL	RESISTOR		R1083	1-218-941-81	RES-CHIP 100 5% 1/16W		
1973		BL	RESISTOR		R1084	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1974		BL	RESISTOR		R1085	1-218-941-81	RES-CHIP 100 5% 1/16W		
1975		BL	RESISTOR		R1086	1-218-941-81	RES-CHIP 100 5% 1/16W		
1976		BL	RESISTOR		R1087	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1977		BL	RESISTOR		R1089	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1978		BL	RESISTOR		R1092	1-218-945-11	RES-CHIP 220 5% 1/16W		
1979		BL	RESISTOR		R1094	1-216-864-11	SHORT CHIP 0		
1980		BL	RESISTOR		R1096	1-216-805-11	METAL CHIP 47 5% 1/10W		
1981		BL	RESISTOR		R1097	1-216-805-11	METAL CHIP 47 5% 1/10W		
1982		BL	RESISTOR		R1098	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1983		BL	RESISTOR		R1100	1-216-864-11	SHORT CHIP 0		
1984		BL	RESISTOR		R1101	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1985		BL	RESISTOR		R1102	1-216-864-11	SHORT CHIP 0		
1986		BL	RESISTOR		R1103	1-216-864-11	SHORT CHIP 0		
1987		BL	RESISTOR		R1104	1-216-864-11	SHORT CHIP 0		
1988		BL	RESISTOR		R1105	1-216-864-11	SHORT CHIP 0		
1989		BL	RESISTOR		R1106	1-216-864-11	SHORT CHIP 0		
1990		BL	RESISTOR		R1107	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1991		BL	RESISTOR		R1108	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1992		BL	RESISTOR		R1110	1-218-990-11	SHORT CHIP 0		
1993		BL	RESISTOR		R1111	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
1994		BL	RESISTOR		R1112	1-218-971-11	RES-CHIP 33K 5% 1/16W		
1995		BL	RESISTOR		R1113	1-218-990-11	SHORT CHIP 0		
1996		BL	RESISTOR		R1117	1-216-864-11	SHORT CHIP 0		
1997		BL	RESISTOR		R1118	1-216-864-11	SHORT CHIP 0		
1998		BL	RESISTOR		R1119	1-216-864-11	SHORT CHIP 0		
1999		BL	RESISTOR		R1120	1-218-990-11	SHORT CHIP 0		
2000		BL	RESISTOR		R1121	1-218-990-11	SHORT CHIP 0		
2001		BL	RESISTOR		R1123	1-218-973-11	RES-CHIP 47K 5% 1/16W		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2002		BL	RESISTOR		R2001	1-216-809-11	METAL CHIP 100 5% 1/10W		
2003		BL	RESISTOR		R2002	1-216-809-11	METAL CHIP 100 5% 1/10W		
2004		BL	RESISTOR		R2003	1-216-809-11	METAL CHIP 100 5% 1/10W		
2005		BL	RESISTOR		R2004	1-218-952-11	RES-CHIP 820 5% 1/16W		
2006		BL	RESISTOR		R2005	1-218-952-11	RES-CHIP 820 5% 1/16W		
2007		BL	RESISTOR		R2006	1-218-952-11	RES-CHIP 820 5% 1/16W		
2008		BL	RESISTOR		R2007	1-218-675-11	METAL CHIP 200 0.5% 1/10W		
2009		BL	RESISTOR		R2008	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
2010		BL	RESISTOR		R2009	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
2011		BL	RESISTOR		R2010	1-218-675-11	METAL CHIP 200 0.5% 1/10W		
2012		BL	RESISTOR		R2011	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
2013		BL	RESISTOR		R2012	1-216-809-11	METAL CHIP 100 5% 1/10W		
2014		BL	RESISTOR		R2013	1-216-809-11	METAL CHIP 100 5% 1/10W		
2015		BL	RESISTOR		R2014	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
2016		BL	RESISTOR		R2015	1-216-809-11	METAL CHIP 100 5% 1/10W		
2017		BL	RESISTOR		R2016	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
2018		BL	RESISTOR		R2017	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
2019		BL	RESISTOR		R2018	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
2020		BL	RESISTOR		R2019	1-216-864-11	SHORT CHIP 0		
2021		BL	RESISTOR		R2020	1-216-864-11	SHORT CHIP 0		
2022		BL	RESISTOR		R2021	1-216-864-11	SHORT CHIP 0		
2023		BL	RESISTOR		R2023	1-216-864-11	SHORT CHIP 0		
2024		BL	RESISTOR		R2024	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
2025		BL	RESISTOR		R2025	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
2026		BL	RESISTOR		R2026	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
2027		BL	RESISTOR		R2027	1-216-864-11	SHORT CHIP 0		
2028		BL	RESISTOR		R2028	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
2029		BL	RESISTOR		R2029	1-218-712-11	METAL CHIP 6.8K 0.5% 1/10W		
2030		BL	RESISTOR		R2030	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
2031		BL	RESISTOR		R2031	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
2032		BL	RESISTOR		R2032	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
2033		BL	RESISTOR		R2034	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
2034		BL	RESISTOR		R2035	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
2035		BL	RESISTOR		R2036	1-218-652-11	METAL CHIP 22 0.5% 1/10W		
2036		BL	RESISTOR		R2037	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
2037		BL	RESISTOR		R2038	1-216-847-11	METAL CHIP 150K 5% 1/10W		
2038		BL	RESISTOR		R2041	1-218-668-11	METAL CHIP 100 0.5% 1/10W		
2039		BL	RESISTOR		R2046	1-218-688-11	METAL CHIP 680 0.5% 1/10W		
2040		BL	RESISTOR		R2047	1-218-668-11	METAL CHIP 100 0.5% 1/10W		
2041		BL	RESISTOR		R2050	1-216-864-11	SHORT CHIP 0		
2042		BL	RESISTOR		R2053	1-218-688-11	METAL CHIP 680 0.5% 1/10W		
2043		BL	RESISTOR		R2054	1-216-864-11	SHORT CHIP 0		
2044		BL	RESISTOR		R2055	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2045		BL	RESISTOR		R2057	1-216-864-11	SHORT CHIP 0		
2046		BL	RESISTOR		R2058	1-216-864-11	SHORT CHIP 0		
2047		BL	RESISTOR		R2070	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
2048		BL	RESISTOR		R2071	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
2049		BL	RESISTOR		R2072	1-218-693-11	METAL CHIP 1.1K 0.5% 1/10W		
2050		BL	RESISTOR		R2073	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
2051		BL	RESISTOR		R2075	1-218-720-11	METAL CHIP 15K 0.5% 1/10W		
2052		BL	RESISTOR		R2076	1-218-990-11	SHORT CHIP 0		
2053		BL	RESISTOR		R2077	1-218-990-11	SHORT CHIP 0		
2054		BL	RESISTOR		R2078	1-216-864-11	SHORT CHIP 0		
2055		BL	RESISTOR		R2079	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
2056		BL	RESISTOR		R2080	1-218-696-11	METAL CHIP 1.5K 0.5% 1/10W		
2057		BL	RESISTOR		R2081	1-216-864-11	SHORT CHIP 0		
2058		BL	RESISTOR		R2086	1-216-864-11	SHORT CHIP 0		
2059		BL	RESISTOR		R2087	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2060		BL	RESISTOR		R2088	1-218-941-81	RES-CHIP 100 5% 1/16W		
2061		BL	RESISTOR		R2089	1-218-941-81	RES-CHIP 100 5% 1/16W		
2062		BL	RESISTOR		R2091	1-216-864-11	SHORT CHIP 0		
2063		BL	RESISTOR		R2092	1-216-864-11	SHORT CHIP 0		
2064		BL	RESISTOR		R2093	1-218-990-11	SHORT CHIP 0		
2065		BL	RESISTOR		R2094	1-218-990-11	SHORT CHIP 0		
2066		BL	RESISTOR		R2095	1-218-933-11	RES-CHIP 22 5% 1/16W		
2067		BL	RESISTOR		R2096	1-218-985-11	RES-CHIP 470K 5% 1/16W		
2068		BL	RESISTOR		R2097	1-218-990-11	SHORT CHIP 0		
2069		BL	RESISTOR		R2098	1-218-937-11	RES-CHIP 47 5% 1/16W		
2070		BL	RESISTOR		R2099	1-218-937-11	RES-CHIP 47 5% 1/16W		
2071		BL	RESISTOR		R2100	1-218-933-11	RES-CHIP 22 5% 1/16W		
2072		BL	RESISTOR		R2101	1-218-937-11	RES-CHIP 47 5% 1/16W		
2073		BL	RESISTOR		R2102	1-218-937-11	RES-CHIP 47 5% 1/16W		
2074		BL	RESISTOR		R2103	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2075		BL	RESISTOR		R2104	1-218-965-11	RES-CHIP 10K 5% 1/16W		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2076		BL	RESISTOR		R2105	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2077		BL	RESISTOR		R2106	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2078		BL	RESISTOR		R2107	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2079		BL	RESISTOR		R2108	1-218-990-11	SHORT CHIP 0		
2080		BL	RESISTOR		R2109	1-218-990-11	SHORT CHIP 0		
2081		BL	RESISTOR		R2110	1-218-990-11	SHORT CHIP 0		
2082		BL	RESISTOR		R2111	1-218-990-11	SHORT CHIP 0		
2083		BL	RESISTOR		R2112	1-218-933-11	RES-CHIP 22 5% 1/16W		
2084		BL	RESISTOR		R2200	1-216-296-11	SHORT CHIP 0		
2085		BL	RESISTOR		R2202	1-216-296-11	SHORT CHIP 0		
2086		BL	RESISTOR		R2203	1-216-296-11	SHORT CHIP 0		
2087		BL	RESISTOR		R3001	1-218-933-11	RES-CHIP 22 5% 1/16W		
2088		BL	RESISTOR		R3004	1-218-937-11	RES-CHIP 47 5% 1/16W		
2089		BL	RESISTOR		R3005	1-218-941-81	RES-CHIP 100 5% 1/16W		
2090		BL	RESISTOR		R3006	1-218-941-81	RES-CHIP 100 5% 1/16W		
2091		BL	RESISTOR		R3007	1-218-933-11	RES-CHIP 22 5% 1/16W		
2092		BL	RESISTOR		R3008	1-218-945-11	METAL CHIP 220 5% 1/16W		
2093		BL	RESISTOR		R3009	1-218-945-11	METAL CHIP 220 5% 1/16W		
2094		BL	RESISTOR		R3010	1-208-695-11	METAL CHIP 3.3K 0.5% 1/16W		
2095		BL	RESISTOR		R3011	1-218-945-11	METAL CHIP 220 5% 1/16W		
2096		BL	RESISTOR		R3012	1-218-933-11	RES-CHIP 22 5% 1/16W		
2097		BL	RESISTOR		R3013	1-220-180-11	METAL CHIP 620 5% 1/16W		
2098		BL	RESISTOR		R3014	1-218-990-11	SHORT CHIP 0		
2099		BL	RESISTOR		R3015	1-218-990-11	SHORT CHIP 0		
2100		BL	RESISTOR		R3018	1-208-873-81	METAL CHIP 270 0.5% 1/16W		
2101		BL	RESISTOR		R3023	1-218-990-11	SHORT CHIP 0		
2102		BL	RESISTOR		R3024	1-218-941-81	RES-CHIP 100 5% 1/16W		
2103		BL	RESISTOR		R3025	1-218-941-81	RES-CHIP 100 5% 1/16W		
2104		BL	RESISTOR		R3042	1-218-933-11	RES-CHIP 22 5% 1/16W		
2105		BL	RESISTOR		R3043	1-218-933-11	RES-CHIP 22 5% 1/16W		
2106		BL	RESISTOR		R3050	1-218-990-11	SHORT CHIP 0		
2107		BL	RESISTOR		R3057	1-218-990-11	SHORT CHIP 0		
2108		BL	RESISTOR		R3058	1-218-990-11	SHORT CHIP 0		
2109		BL	RESISTOR		R3059	1-218-941-81	RES-CHIP 100 5% 1/16W		
2110		BL	RESISTOR		R3066	1-218-969-11	RES-CHIP 22K 5% 1/16W		
2111		BL	RESISTOR		R3067	1-218-985-11	RES-CHIP 470K 5% 1/16W		
2112		BL	RESISTOR		R3068	1-218-933-11	RES-CHIP 22 5% 1/16W		
2113		BL	RESISTOR		R3069	1-218-945-11	RES-CHIP 220 5% 1/16W		
2114		BL	RESISTOR		R3070	1-218-953-11	RES-CHIP 1K 5% 1/16W		
2115		BL	RESISTOR		R3071	1-218-945-11	RES-CHIP 220 5% 1/16W		
2116		BL	RESISTOR		R3072	1-218-947-11	RES-CHIP 330 5% 1/16W		
2117		BL	RESISTOR		R3073	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
2118		BL	RESISTOR		R3074	1-208-696-11	METAL CHIP 3.6K 0.5% 1/16W		
2119		BL	RESISTOR		R3075	1-218-990-11	SHORT CHIP 0		
2120		BL	RESISTOR		R3076	1-218-985-11	RES-CHIP 470K 5% 1/16W		
2121		BL	RESISTOR		R3077	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2122		BL	RESISTOR		R4001	1-216-864-11	SHORT CHIP 0		
2123		BL	RESISTOR		R4002	1-216-864-11	SHORT CHIP 0		
2124		BL	RESISTOR		R4003	1-216-801-11	METAL CHIP 22 5% 1/10W		
2125		BL	RESISTOR		R4004	1-216-805-11	METAL CHIP 47 5% 1/10W		
2126		BL	RESISTOR		R4005	1-216-805-11	METAL CHIP 47 5% 1/10W		
2127		BL	RESISTOR		R4006	1-216-805-11	METAL CHIP 47 5% 1/10W		
2128		BL	RESISTOR		R4007	1-216-864-11	SHORT CHIP 0		
2129		BL	RESISTOR		R4008	1-216-801-11	METAL CHIP 22 5% 1/10W		
2130		BL	RESISTOR		R4010	1-216-864-11	SHORT CHIP 0		
2131		BL	RESISTOR		R4011	1-216-864-11	SHORT CHIP 0		
2132		BL	RESISTOR		R4012	1-216-859-11	METAL CHIP 1.5M 5% 1/10W		
2133		BL	RESISTOR		R4013	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
2134		BL	RESISTOR		R4014	1-218-990-11	SHORT CHIP 0		
2135		BL	RESISTOR		R4015	1-218-990-11	SHORT CHIP 0		
2136		BL	RESISTOR		R4016	1-216-802-11	METAL CHIP 27 5% 1/10W		
2137		BL	RESISTOR		R4017	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
2138		BL	RESISTOR		R4018	1-216-864-11	SHORT CHIP 0		
2139		BL	RESISTOR		R4020	1-216-805-11	METAL CHIP 47 5% 1/10W		
2140		BL	RESISTOR		R4021	1-216-805-11	METAL CHIP 47 5% 1/10W		
2141		BL	RESISTOR		R4023	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
2142		BL	RESISTOR		R4028	1-216-864-11	SHORT CHIP 0		
2143		BL	RESISTOR		R4029	1-216-864-11	SHORT CHIP 0		
2144		BL	RESISTOR		R4030	1-216-864-11	SHORT CHIP 0		
2145		BL	RESISTOR		R4031	1-216-864-11	SHORT CHIP 0		
2146		BL	RESISTOR		R4032	1-216-864-11	SHORT CHIP 0		
2147		BL	RESISTOR		R4033	1-216-864-11	SHORT CHIP 0		
2148		BL	RESISTOR		R4034	1-218-990-11	SHORT CHIP 0		
2149		BL	RESISTOR		R4035	1-218-990-11	SHORT CHIP 0		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2150		BL	RESISTOR		R4036	1-218-990-11	SHORT CHIP 0		
2151		BL	RESISTOR		R4037	1-218-990-11	SHORT CHIP 0		
2152		BL	RESISTOR		R4038	1-218-990-11	SHORT CHIP 0		
2153		BL	RESISTOR		R4040	1-218-990-11	SHORT CHIP 0		
2154		BL	RESISTOR		R4041	1-218-941-81	RES-CHIP 100 5% 1/16W		
2155		BL	RESISTOR		R4042	1-218-941-81	RES-CHIP 100 5% 1/16W		
2156		BL	RESISTOR		R4043	1-218-941-81	RES-CHIP 100 5% 1/16W		
2157		BL	RESISTOR		R4047	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
2158		BL	RESISTOR		R4048	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2159		BL	RESISTOR		R4050	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2160		BL	RESISTOR		R4051	1-216-809-11	METAL CHIP 100 5% 1/10W		
2161		BL	RESISTOR		R4053	1-216-864-11	SHORT CHIP 0		
2162		BL	RESISTOR		R4055	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
2163		BL	RESISTOR		R4057	1-216-864-11	SHORT CHIP 0		
2164		BL	RESISTOR		R4058	1-216-864-11	SHORT CHIP 0		
2165		BL	RESISTOR		R4060	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
2166		BL	RESISTOR		R4062	1-216-864-11	SHORT CHIP 0		
2167		BL	RESISTOR		R4063	1-218-990-11	SHORT CHIP 0		
2168		BL	RESISTOR		R4064	1-218-990-11	SHORT CHIP 0		
2169		BL	RESISTOR		R4065	1-218-990-11	SHORT CHIP 0		
2170		BL	RESISTOR		R4066	1-218-990-11	SHORT CHIP 0		
2171		BL	RESISTOR		R4067	1-218-990-11	SHORT CHIP 0		
2172		BL	RESISTOR		R4068	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
2173		BL	RESISTOR		R4069	1-216-864-11	SHORT CHIP 0		
2174		BL	RESISTOR		R4070	1-218-990-11	SHORT CHIP 0		
2175		BL	RESISTOR		R4071	1-218-864-11	METAL CHIP 5.1K 0.5% 1/10W		
2176		BL	RESISTOR		R4072	1-208-683-11	METAL CHIP 1K 0.5% 1/16W		
2177		BL	RESISTOR		R4073	1-208-898-81	METAL CHIP 3K 0.5% 1/16W		
2178		BL	RESISTOR		R4074	1-208-683-11	METAL CHIP 1K 0.5% 1/16W		
2179		BL	RESISTOR		R4075	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2180		BL	RESISTOR		R4076	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2181		BL	RESISTOR		R4077	1-216-839-11	METAL CHIP 33K 5% 1/10W		
2182		BL	RESISTOR		R4078	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2183		BL	RESISTOR		R4079	1-216-809-11	METAL CHIP 100 5% 1/10W		
2184		BL	RESISTOR		R4080	1-216-864-11	SHORT CHIP 0		
2185		BL	RESISTOR		R4081	1-216-839-11	METAL CHIP 33K 5% 1/10W		
2186		BL	RESISTOR		R4083	1-216-864-11	SHORT CHIP 0		
2187		BL	RESISTOR		R4087	1-216-864-11	SHORT CHIP 0		
2188		BL	RESISTOR		R4088	1-216-864-11	SHORT CHIP 0		
2189		BL	RESISTOR		R4089	1-216-801-11	METAL CHIP 22 5% 1/10W		
2190		BL	RESISTOR		R4090	1-216-813-11	METAL CHIP 220 5% 1/10W		
2191		BL	RESISTOR		R4091	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
2192		BL	RESISTOR		R4092	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
2193		BL	RESISTOR		R4093	1-216-864-11	SHORT CHIP 0		
2194		BL	RESISTOR		R4095	1-216-805-11	METAL CHIP 47 5% 1/10W		
2195		BL	RESISTOR		R4096	1-216-864-11	SHORT CHIP 0		
2196		BL	RESISTOR		R4097	1-216-864-11	SHORT CHIP 0		
2197		BL	RESISTOR		R4098	1-216-864-11	SHORT CHIP 0		
2198		BL	RESISTOR		R4099	1-216-864-11	SHORT CHIP 0		
2199		BL	RESISTOR		R4100	1-216-801-11	METAL CHIP 22 5% 1/10W		
2200		BL	RESISTOR		R4101	1-216-801-11	METAL CHIP 22 5% 1/10W		
2201		BL	RESISTOR		R4102	1-216-864-11	SHORT CHIP 0		
2202		BL	RESISTOR		R4501	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
2203		BL	RESISTOR		R4503	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
2204		BL	RESISTOR		R4505	1-216-864-11	SHORT CHIP 0		
2205		BL	RESISTOR		R4506	1-216-864-11	SHORT CHIP 0		
2206		BL	RESISTOR		R4508	1-218-941-81	RES-CHIP 100 5% 1/16W		
2207		BL	RESISTOR		R4509	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2208		BL	RESISTOR		R4510	1-216-864-11	SHORT CHIP 0		
2209		BL	RESISTOR		R4511	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2210		BL	RESISTOR		R4512	1-216-864-11	SHORT CHIP 0		
2211		BL	RESISTOR		R4513	1-218-965-11	RES-CHIP 10K 5% 1/16W		
2212		BL	RESISTOR		R4514	1-216-864-11	SHORT CHIP 0		
2213		BL	RESISTOR		R4515	1-216-864-11	SHORT CHIP 0		
2214		BL	RESISTOR		R4516	1-216-812-11	METAL CHIP 180 5% 1/10W		
2215		BL	RESISTOR		R4517	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2216		BL	RESISTOR		R4518	1-216-864-11	SHORT CHIP 0		
2217		BL	RESISTOR		R4519	1-218-937-11	RES-CHIP 47 5% 1/16W		
2218		BL	RESISTOR		R4520	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2219		BL	RESISTOR		R4521	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2220		BL	RESISTOR		R4522	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2221		BL	RESISTOR		R4525	1-218-933-11	RES-CHIP 22 5% 1/16W		
2222		BL	RESISTOR		R4526	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2223		BL	RESISTOR		R4527	1-216-864-11	SHORT CHIP 0		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2224		BL	RESISTOR		R4528	1-218-937-11	RES-CHIP 47 5% 1/16W		
2225		BL	RESISTOR		R4529	1-218-937-11	RES-CHIP 47 5% 1/16W		
2226		BL	NETWORK		RB1001	1-234-372-21	RES, NETWORK 100X4 (1005)		
2227		BL	NETWORK		RB1002	1-234-372-21	RES, NETWORK 100X4 (1005)		
2228		BL	NETWORK		RB1003	1-234-372-21	RES, NETWORK 100X4 (1005)		
2229		BL	NETWORK		RB1004	1-239-674-81	RESISTOR, NETWORK 100		
2230		BL	NETWORK		RB1005	1-234-378-21	RES, NETWORK 10KX4 (1005)		
2231		BL	NETWORK		RB1006	1-234-372-21	RES, NETWORK 100X4 (1005)		
2232		BL	NETWORK		RB1007	1-234-372-21	RES, NETWORK 100X4 (1005)		
2233		BL	NETWORK		RB1008	1-234-372-21	RES, NETWORK 100X4 (1005)		
2234		BL	NETWORK		RB1009	1-234-380-21	RES, NETWORK 47KX4 (1005)		
2235		BL	NETWORK		RB1010	1-234-372-21	RES, NETWORK 100X4 (1005)		
2236		BL	NETWORK		RB1011	1-234-372-21	RES, NETWORK 100X4 (1005)		
2237		BL	NETWORK		RB1012	1-234-372-21	RES, NETWORK 100X4 (1005)		
2238		BL	NETWORK		RB1013	1-234-372-21	RES, NETWORK 100X4 (1005)		
2239		BL	NETWORK		RB1014	1-234-372-21	RES, NETWORK 100X4 (1005)		
2240		BL	NETWORK		RB1015	1-234-372-21	RES, NETWORK 100X4 (1005)		
2241		BL	NETWORK		RB1016	1-234-372-21	RES, NETWORK 100X4 (1005)		
2242		BL	NETWORK		RB1017	1-234-372-21	RES, NETWORK 100X4 (1005)		
2243		BL	NETWORK		RB1018	1-234-372-21	RES, NETWORK 100X4 (1005)		
2244		BL	NETWORK		RB1019	1-234-372-21	RES, NETWORK 100X4 (1005)		
2245		BL	NETWORK		RB1020	1-239-674-81	RESISTOR, NETWORK 100		
2246		BL	NETWORK		RB1021	1-239-674-81	RESISTOR, NETWORK 100		
2247		BL	NETWORK		RB1022	1-234-372-21	RES, NETWORK 100X4 (1005)		
2248		BL	NETWORK		RB1023	1-234-372-21	RES, NETWORK 100X4 (1005)		
2249		BL	NETWORK		RB1024	1-239-674-81	RESISTOR, NETWORK 100		
2250		BL	NETWORK		RB1025	1-234-372-21	RES, NETWORK 100X4 (1005)		
2251		BL	NETWORK		RB1026	1-234-372-21	RES, NETWORK 100X4 (1005)		
2252		BL	NETWORK		RB1027	1-234-372-21	RES, NETWORK 100X4 (1005)		
2253		BL	NETWORK		RB2002	1-234-795-21	RES, NETWORK 0X4 (2010)		
2254		BL	NETWORK		RB2003	1-234-795-21	RES, NETWORK 0X4 (2010)		
2255		BL	NETWORK		RB2004	1-234-795-21	RES, NETWORK 0X4 (2010)		
2256		BL	NETWORK		RB2005	1-234-795-21	RES, NETWORK 0X4 (2010)		
2257		BL	NETWORK		RB2006	1-234-378-21	RES, NETWORK 10KX4 (1005)		
2258		BL	NETWORK		RB2007	1-234-372-21	RES, NETWORK 100X4 (1005)		
2259		BL	NETWORK		RB2008	1-234-372-21	RES, NETWORK 100X4 (1005)		
2260		BL	NETWORK		RB2009	1-234-372-21	RES, NETWORK 100X4 (1005)		
2261		BL	NETWORK		RB2010	1-234-372-21	RES, NETWORK 100X4 (1005)		
2262		BL	NETWORK		RB2011	1-234-372-21	RES, NETWORK 100X4 (1005)		
2263		BL	NETWORK		RB2012	1-234-372-21	RES, NETWORK 100X4 (1005)		
2264		BL	NETWORK		RB2013	1-234-372-21	RES, NETWORK 100X4 (1005)		
2265		BL	NETWORK		RB2014	1-234-372-21	RES, NETWORK 100X4 (1005)		
2266		BL	NETWORK		RB2015	1-234-372-21	RES, NETWORK 100X4 (1005)		
2267		BL	NETWORK		RB2016	1-239-670-81	RESISTOR, NETWORK 47		
2268		BL	NETWORK		RB2017	1-234-371-21	RES, NETWORK 47X4 (1005)		
2269		BL	NETWORK		RB2018	1-234-371-21	RES, NETWORK 47X4 (1005)		
2270		BL	NETWORK		RB2019	1-239-670-81	RESISTOR, NETWORK 47		
2271		BL	NETWORK		RB2020	1-234-371-21	RES, NETWORK 47X4 (1005)		
2272		BL	NETWORK		RB2021	1-234-371-21	RES, NETWORK 47X4 (1005)		
2273		BL	NETWORK		RB3001	1-234-372-21	RES, NETWORK 100X4 (1005)		
2274		BL	NETWORK		RB3002	1-234-372-21	RES, NETWORK 100X4 (1005)		
2275		BL	NETWORK		RB3003	1-234-371-21	RES, NETWORK 47X4 (1005)		
2276		BL	NETWORK		RB3004	1-234-372-21	RES, NETWORK 100X4 (1005)		
2277		BL	NETWORK		RB3006	1-234-372-21	RES, NETWORK 100X4 (1005)		
2278		BL	NETWORK		RB3008	1-234-372-21	RES, NETWORK 100X4 (1005)		
2279		BL	NETWORK		RB3009	1-234-372-21	RES, NETWORK 100X4 (1005)		
2280		BL	NETWORK		RB3011	1-234-372-21	RES, NETWORK 100X4 (1005)		
2281		BL	NETWORK		RB3013	1-234-372-21	RES, NETWORK 100X4 (1005)		
2282		BL	NETWORK		RB3014	1-234-372-21	RES, NETWORK 100X4 (1005)		
2283		BL	NETWORK		RB3015	1-234-372-21	RES, NETWORK 100X4 (1005)		
2284		BL	NETWORK		RB4001	1-234-372-21	RES, NETWORK 100X4 (1005)		
2285		BL	NETWORK		RB4002	1-234-372-21	RES, NETWORK 100X4 (1005)		
2286		BL	NETWORK		RB4003	1-234-372-21	RES, NETWORK 100X4 (1005)		
2287		BL	NETWORK		RB4004	1-234-372-21	RES, NETWORK 100X4 (1005)		
2288		BL	NETWORK		RB4005	1-234-372-21	RES, NETWORK 100X4 (1005)		
2289		BL	NETWORK		RB4006	1-234-372-21	RES, NETWORK 100X4 (1005)		
2290		BL	NETWORK		RB4007	1-234-370-21	RES, NETWORK 22X4 (1005)		
2291		BL	NETWORK		RB4008	1-234-370-21	RES, NETWORK 22X4 (1005)		
2292		BL	NETWORK		RB4009	1-234-370-21	RES, NETWORK 22X4 (1005)		
2293		BL	NETWORK		RB4010	1-234-370-21	RES, NETWORK 22X4 (1005)		
2294		BL	NETWORK		RB4011	1-234-370-21	RES, NETWORK 22X4 (1005)		
2295		BL	NETWORK		RB4012	1-234-370-21	RES, NETWORK 22X4 (1005)		
2296		BL	NETWORK		RB4013	1-234-400-21	CONDUCTOR, NETWORK (2010)		
2297		BL	NETWORK		RB4014	1-234-400-21	CONDUCTOR, NETWORK (2010)		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2298		BL	NETWORK		RB4015	1-234-400-21	CONDUCTOR, NETWORK (2010)		
2299		BL	NETWORK		RB4016	1-234-400-21	CONDUCTOR, NETWORK (2010)		
2300		BL	NETWORK		RB4017	1-234-371-21	RES, NETWORK 47X4 (1005)		
2301		BL	NETWORK		RB4018	1-234-371-21	RES, NETWORK 47X4 (1005)		
2302		BL	NETWORK		RB4019	1-234-371-21	RES, NETWORK 47X4 (1005)		
2303		BL	NETWORK		RB4020	1-234-371-21	RES, NETWORK 47X4 (1005)		
2304		BL	NETWORK		RB4021	1-239-674-81	RESISTOR, NETWORK 100		
2305		BL	NETWORK		RB4022	1-239-674-81	RESISTOR, NETWORK 100		
2306		BL	NETWORK		RB4023	1-234-370-21	RES, NETWORK 22X4 (1005)		
2307		BL	NETWORK		RB4024	1-234-370-21	RES, NETWORK 22X4 (1005)		
2308		BL	NETWORK		RB4025	1-234-370-21	RES, NETWORK 22X4 (1005)		
2309		BL	NETWORK		RB4026	1-234-370-21	RES, NETWORK 22X4 (1005)		
2310		BL	NETWORK		RB4501	1-234-372-21	RES, NETWORK 100X4 (1005)		
2311		BL	NETWORK		RB4502	1-234-372-21	RES, NETWORK 100X4 (1005)		
2312		BL	NETWORK		RB4503	1-234-372-21	RES, NETWORK 100X4 (1005)		
2313		BL	NETWORK		RB4504	1-234-372-21	RES, NETWORK 100X4 (1005)		
2314		BL	NETWORK		RB4505	1-234-371-21	RES, NETWORK 47X4 (1005)		
2315		BL	NETWORK		RB4506	1-234-371-21	RES, NETWORK 47X4 (1005)		
2316		BL	NETWORK		RB4507	1-234-371-21	RES, NETWORK 47X4 (1005)		
2317		BL	NETWORK		RB4508	1-234-371-21	RES, NETWORK 47X4 (1005)		
2318		BL	NETWORK		RB4509	1-234-371-21	RES, NETWORK 47X4 (1005)		
2319		BL	NETWORK		RB4510	1-234-371-21	RES, NETWORK 47X4 (1005)		
2320		BL	NETWORK		RB4511	1-234-370-21	RES, NETWORK 22X4 (1005)		
2321		BL	NETWORK		RB4512	1-234-371-21	RES, NETWORK 47X4 (1005)		
2322		BL	NETWORK		RB4513	1-234-371-21	RES, NETWORK 47X4 (1005)		
2323		BL	NETWORK		RB4514	1-234-371-21	RES, NETWORK 47X4 (1005)		
2324		BL	NETWORK		RB4515	1-234-371-21	RES, NETWORK 47X4 (1005)		
2325		BL	CHIP CHCKER		TP1001	1-535-757-11	CHIP, CHECKER		
2326		BL	CHIP CHCKER		TP4501	1-535-757-11	CHIP, CHECKER		
2327		BL	CHIP CHCKER		TP4502	1-535-757-11	CHIP, CHECKER		
2328		BL	CRYSTAL		X1001	1-813-326-21	VIBRATOR, CRYSTAL		
2329		BL	CRYSTAL		X2002	1-795-951-21	QUARTZ CRYSTAL OSCILLATOR(SMD)		
2330		BL	CRYSTAL		X4001	1-767-655-21	VIBRATOR, CRYSTAL		
2331		BL	CRYSTAL		X4501	1-795-416-21	VIBRATOR, CRYSTAL		
2332		BL	CRYSTAL		X4502	1-795-850-21	OSCILLATOR, CRYSTAL		
2334		GL	CAPACITOR	△	C601	1-113-889-11	CERAMIC 0.001UF 20.00% 250V		
2335		GL	CAPACITOR	△	C602	1-119-894-51	CERAMIC 2200PF 20.00% 250V		
2336		GL	CAPACITOR	△	C603	1-119-907-51	CERAMIC 4700PF 20.00% 250V		
2337		GL	CAPACITOR	△	C604	1-165-530-11	MYLAR 0.47UF 10 275V		
2338		GL	CAPACITOR	△	C605	1-165-529-11	MYLAR 0.22UF 10 275V		
2339		GL	CAPACITOR	△	C606	1-119-894-51	CERAMIC 2200PF 20.00% 250V		
2340		GL	CAPACITOR	△	C607	1-119-907-51	CERAMIC 4700PF 20.00% 250V		
2341		GL	CAPACITOR	△	C608	1-131-866-11	ELECT 150UF 20% 450V		
2342		GL	CAPACITOR	△	C609	1-131-866-11	ELECT 150UF 20% 450V		
2343		GL	CAPACITOR		C616	1-119-891-51	CERAMIC 220PF 10.00% 250V		
2344		GL	CAPACITOR		C617	1-119-891-51	CERAMIC 220PF 10.00% 250V		
2345		GL	CAPACITOR		C620	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
2346		GL	CAPACITOR		C621	1-107-905-11	ELECT 4.7UF 20.00% 50V		
2347		GL	CAPACITOR		C622	1-107-888-11	ELECT 47UF 20.00% 25V		
2348		GL	CAPACITOR		C623	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V		
2349		GL	CAPACITOR		C624	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
2350		GL	CAPACITOR		C625	1-107-906-11	ELECT 10UF 20.00% 50V		
2351		GL	CAPACITOR		C627	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
2352		GL	CAPACITOR		C628	1-136-165-00	FILM 0.1UF 5.00% 50V		
2353		GL	CAPACITOR		C629	1-107-909-11	ELECT 47UF 20.00% 50V		
2354		GL	CAPACITOR		C630	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
2355		GL	CAPACITOR		C631	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
2356		GL	CAPACITOR		C632	1-137-990-22	FILM 33000PF 3% 800V		
2357		GL	CAPACITOR		C633	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
2358		GL	CAPACITOR		C634	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
2359		GL	CAPACITOR		C650	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
2360		GL	CAPACITOR		C651	1-107-907-11	ELECT 22UF 20.00% 50V		
2361		GL	CAPACITOR		C652	1-165-737-31	ELECT 1800UF 20% 25V		
2362		GL	CAPACITOR		C653	1-165-737-31	ELECT 1800UF 20% 25V		
2363		GL	CAPACITOR		C655	1-137-903-31	ELECT 1200UF 20% 16V		
2364		GL	CAPACITOR		C656	1-107-907-11	ELECT 22UF 20.00% 50V		
2365		GL	CAPACITOR		C657	1-165-751-31	ELECT 330UF 20% 50V		
2366		GL	CAPACITOR		C658	1-131-976-11	ELECT 820UF 20% 25V		
2367		GL	CAPACITOR		C660	1-136-201-61	MYLAR 0.22UF 10.00% 400V		
2368		GL	CAPACITOR		C661	1-107-974-11	CERAMIC 47PF 5.00% 2KV		
2369		GL	CAPACITOR		C662	1-107-903-11	ELECT 2.2UF 20.00% 50V		
2370		GL	CAPACITOR		C663	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
2371		GL	CAPACITOR		C664	1-104-331-11	CERAMIC 0.0022UF 10.00% 1KV		
2372		GL	CAPACITOR		C665	1-107-905-11	ELECT 4.7UF 20.00% 50V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2373		GL	CAPACITOR		C666	1-107-909-11	ELECT 47UF 20.00% 50V		
2374		GL	CAPACITOR		C667	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
2375		GL	CAPACITOR	△	C668	1-113-889-11	CERAMIC 0.001UF 20.00% 250V		
2376		GL	CAPACITOR		C680	1-131-872-91	CERAMIC CHIP 1000PF 10% 630V		
2377		GL	CAPACITOR		C681	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
2378		GL	CAPACITOR		C682	1-165-736-31	ELECT 680UF 20% 25V		
2379		GL	CAPACITOR		C683	1-107-902-11	ELECT 1UF 20.00% 50V		
2380		GL	CAPACITOR		C684	1-107-909-11	ELECT 47UF 20.00% 50V		
2381		GL	CAPACITOR		C685	1-107-902-11	ELECT 1UF 20.00% 50V		
2382		GL	CAPACITOR		C702	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
2383		GL	CONNECTOR	△*	CN601	1-691-961-11	PIN, CONNECTOR (PC BOARD) 3P		
2384		GL	CONNECTOR	*	CN651	1-564-596-11	PLUG, CONNECTOR 15P		
2385		GL	CONNECTOR	*	CN652	1-564-595-11	PLUG, CONNECTOR 14P		
2386		GL	CONNECTOR	*	CN653	1-564-507-11	PLUG, CONNECTOR 4P		
2387		GL	DIODE	△	D601	8-719-510-53	DIODE D4SB60L		
2388		GL	DIODE		D620	8-719-082-03	DIODE MM3Z15VT1		
2389		GL	DIODE		D621	8-719-082-03	DIODE MM3Z15VT1		
2390		GL	DIODE		D622	8-719-082-03	DIODE MM3Z15VT1		
2391		GL	DIODE		D623	8-719-979-64	DIODE UF4005PKG23		
2392		GL	DIODE		D624	8-719-110-41	DIODE RD15ESB2		
2393		GL	DIODE		D625	8-719-110-41	DIODE RD15ESB2		
2394		GL	DIODE		D651	6-500-501-01	DIODE D10SC6M-4022		
2395		GL	DIODE		D652	6-500-501-01	DIODE D10SC6M-4022		
2396		GL	DIODE		D653	8-719-052-37	DIODE F10P04Q		
2397		GL	DIODE		D654	8-719-082-75	DIODE FCH08A10		
2398		GL	DIODE		D655	6-500-567-31	DIODE 10ERB20-TB3		
2399		GL	DIODE		D656	6-500-567-31	DIODE 10ERB20-TB3		
2400		GL	DIODE		D661	8-719-069-55	DIODE UDZSTE-175.6B		
2401		GL	DIODE		D662	6-500-849-01	DIODE ERA22-08KFLB		
2402		GL	DIODE		D663	6-500-567-31	DIODE 10ERB20-TB3		
2403		GL	DIODE		D664	6-500-567-31	DIODE 10ERB20-TB3		
2404		GL	DIODE		D665	8-719-081-97	DIODE MMDL914T1		
2405		GL	DIODE		D681	6-500-567-31	DIODE 10ERB20-TB3		
2406		GL	DIODE		D682	8-719-081-97	DIODE MMDL914T1		
2407		GL	DIODE		D702	8-719-069-56	DIODE UDZSTE-176.2B		
2408		GL	FUSE	△	F601	1-576-232-12	FUSE 5A 250V		
2409		GL	FERRITE BEAD		FB661	1-410-397-21	FERRITE 1.1UH		
2410		GL	FUSE HOLDER		FH601	1-533-223-11	FUSE HOLDER 0A 0V		
2411		GL	FUSE HOLDER		FH602	1-533-223-11	FUSE HOLDER 0A 0V		
2412		GL	IC		IC621	6-705-768-01	IC MCZ3001UB		
2413		GL	IC		IC651	8-759-682-42	IC MM1431ATT		
2414		GL	IC		IC661	6-600-279-01	IC STR-A6169		
2415		GL	IC		IC681	8-759-682-42	IC MM1431ATT		
2416		GL	COIL	△	L601	1-456-678-11	LINE FILTER COIL		
2417		GL	COIL	△	L602	1-456-678-11	LINE FILTER COIL		
2418		GL	COIL	△	L603	1-456-389-11	INDUCTOR 20MH		
2419		GL	COIL	△	L604	1-456-389-11	INDUCTOR 20MH		
2420		GL	COIL		L651	1-406-971-21	INDUCTOR 10UH		
2421		GL	COIL		L652	1-406-971-21	INDUCTOR 10UH		
2422		GL	COIL		L661	1-412-537-31	INDUCTOR 100UH		
2423		GL	COIL		L681	1-414-187-11	INDUCTOR 47UH		
2424		GL	PHOTO COUPLER	△	PH621	8-749-016-81	PHOTO COUPLER PC123Y22		
2425		GL	PHOTO COUPLER	△	PH661	8-749-016-81	PHOTO COUPLER PC123Y22		
2426		GL	PHOTO COUPLER	△	PH662	8-749-016-81	PHOTO COUPLER PC123Y22		
2427		GL	IC LINK	△	PS651	1-533-596-21	IC LINK 4A 90V		
2428		GL	IC LINK	△	PS652	1-533-596-21	IC LINK 4A 90V		
2429		GL	TRANSISTOR	△	Q621	6-550-898-01	TRANSISTOR 2SK3683-01MR-F104		
2430		GL	TRANSISTOR	△	Q622	6-550-898-01	TRANSISTOR 2SK3683-01MR-F104		
2431		GL	TRANSISTOR		Q623	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
2432		GL	TRANSISTOR		Q661	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
2433		GL	TRANSISTOR		Q662	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
2434		GL	TRANSISTOR		Q681	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
2435		GL	TRANSISTOR		Q682	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
2436		GL	TRANSISTOR		Q683	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
2437		GL	RESISTOR	△	R601	1-219-759-11	METAL 1M 5% 1/2W		
2438		GL	RESISTOR		R620	1-202-933-61	FUSIBLE 0.1 10% 1/2W		
2439		GL	RESISTOR		R621	1-218-879-11	METAL CHIP 22K 0.5% 1/10W		
2440		GL	RESISTOR		R622	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
2441		GL	RESISTOR		R623	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
2442		GL	RESISTOR		R625	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
2443		GL	RESISTOR		R626	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
2444		GL	RESISTOR		R627	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
2445		GL	RESISTOR		R628	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
2446		GL	RESISTOR		R630	1-218-823-11	METAL CHIP 100 0.5% 1/10W		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2447		GL	RESISTOR		R631	1-219-759-11	METAL 1M 5% 1/2W		
2448		GL	RESISTOR		R632	1-249-393-11	CARBON 10 5% 1/4W		
2449		GL	RESISTOR		R633	1-249-393-11	CARBON 10 5% 1/4W		
2450		GL	RESISTOR		R634	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2451		GL	RESISTOR		R635	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2452		GL	RESISTOR		R636	1-245-315-71	METAL OXIDE 0.1 5% 2W		
2453		GL	RESISTOR		R637	1-245-315-71	METAL OXIDE 0.1 5% 2W		
2454		GL	RESISTOR		R638	1-219-759-11	METAL 1M 5% 1/2W		
2455		GL	RESISTOR		R639	1-216-817-11	METAL CHIP 470 5% 1/10W		
2456		GL	RESISTOR		R640	1-216-864-11	SHORT CHIP 0		
2457		GL	RESISTOR		R641	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2458		GL	RESISTOR		R642	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2459		GL	RESISTOR		R650	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2460		GL	RESISTOR		R652	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2461		GL	RESISTOR		R653	1-216-864-11	SHORT CHIP 0		
2462		GL	RESISTOR		R654	1-249-377-11	CARBON 0.47 5% 1/4W		
2463		GL	RESISTOR		R655	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2464		GL	RESISTOR		R656	1-216-864-11	SHORT CHIP 0		
2465		GL	RESISTOR		R657	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
2466		GL	RESISTOR		R658	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
2467		GL	RESISTOR		R660	1-211-771-11	FUSIBLE 4.7 5% 1/4W		
2468		GL	RESISTOR		R661	1-216-150-91	RES-CHIP 10 5% 1/8W		
2469		GL	RESISTOR		R662	1-216-150-91	RES-CHIP 10 5% 1/8W		
2470		GL	RESISTOR		R663	1-216-150-91	RES-CHIP 10 5% 1/8W		
2471		GL	RESISTOR		R664	1-216-150-91	RES-CHIP 10 5% 1/8W		
2472		GL	RESISTOR		R665	1-218-642-11	METAL OXIDE 100K 5% 1W		
2473		GL	RESISTOR		R666	1-216-864-11	SHORT CHIP 0		
2474		GL	RESISTOR		R667	1-249-393-11	CARBON 10 5% 1/4W		
2475		GL	RESISTOR		R668	1-249-393-11	CARBON 10 5% 1/4W		
2476		GL	RESISTOR		R669	1-216-864-11	SHORT CHIP 0		
2477		GL	RESISTOR		R670	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2478		GL	RESISTOR		R671	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2479		GL	RESISTOR		R672	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2480		GL	RESISTOR		R673	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2481		GL	RESISTOR		R674	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2482		GL	RESISTOR		R675	1-211-783-71	FUSIBLE 47 5% 1/4W		
2483		GL	RESISTOR		R676	1-216-864-11	SHORT CHIP 0		
2484		GL	RESISTOR		R680	1-216-817-11	METAL CHIP 470 5% 1/10W		
2485		GL	RESISTOR		R681	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2486		GL	RESISTOR		R682	1-216-864-11	SHORT CHIP 0		
2487		GL	RESISTOR		R683	1-216-839-11	METAL CHIP 33K 5% 1/10W		
2488		GL	RESISTOR		R684	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
2489		GL	RESISTOR		R685	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
2490		GL	RESISTOR		R686	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2491		GL	RESISTOR		R687	1-216-864-11	SHORT CHIP 0		
2492		GL	RESISTOR		R688	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2493		GL	RESISTOR		R689	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2494		GL	RESISTOR		R690	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2495		GL	RESISTOR		R691	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2496		GL	RESISTOR		R692	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2497		GL	RESISTOR		R702	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2498		GL	TRANSFORMER	Δ	T621	1-443-384-11	CONVERTER TRANSFORMER (PIT)		
2499		GL	TRANSFORMER	Δ	T622	1-443-385-11	CONVERTER TRANSFORMER (PIT)		
2500		GL	TRANSFORMER	Δ	T661	1-443-312-11	TRANSFORMER, CONVERTER (SBT)		
2501		GL	VARISTOR	Δ	VD601	1-805-479-21	VARISTOR		
2502		H1	CAPACITOR		C9002	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
2503		H1	CONNECTOR	*	CN9001	1-580-055-21	PIN, CONNECTOR (SMD) 2P		
2504		H1	DIODE		D9001	8-719-069-60	DIODE UDZSTE-179.1B		
2505		H1	RESISTOR		R9001	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
2506		H1	RESISTOR		R9002	1-218-457-11	METAL CHIP 910 5% 1/10W		
2507		H1	RESISTOR		R9003	1-216-817-11	METAL CHIP 470 5% 1/10W		
2508		H1	RESISTOR		R9004	1-216-813-11	METAL CHIP 220 5% 1/10W		
2509		H1	SWITCH		S9001	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
2510		H1	SWITCH		S9002	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
2511		H1	SWITCH		S9003	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
2512		H1	SWITCH		S9004	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
2513		H1	SWITCH		S9005	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
2514		H2	CAPACITOR		C9101	1-162-945-11	CERAMIC CHIP 22PF 5.00% 50V		
2515		H2	CAPACITOR		C9102	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
2516		H2	CAPACITOR		C9103	1-117-137-11	ELECT CHIP 33UF 20.00% 10V		
2517		H2	CAPACITOR		C9104	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
2518		H2	CAPACITOR		C9105	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
2519		H2	CONNECTOR	*	CN9101	1-766-376-11	PIN, CONNECTOR (1.5MM)(SMD) 9P		
2520		H2	DIODE		D9101	8-719-064-07	DIODE SML-310LTT86		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2521		H2	DIODE		D9102	6-500-861-01	DIODE SML-020MVT-T86		
2522		H2	DIODE		D9103	8-719-421-59	DIODE MA3130WA-TX		
2523		H2	DIODE		D9104	8-719-421-59	DIODE MA3130WA-TX		
2524		H2	DIODE		D9105	8-719-421-59	DIODE MA3130WA-TX		
2525		H2	DIODE		D9106	8-719-421-59	DIODE MA3130WA-TX		
2526		H2	IC		IC9101	6-600-117-01	IC GP1UM27SRK		
2527		H2	TRANSISTOR		Q9101	8-729-028-98	TRANSISTOR DTC114WUA-T106		
2528		H2	TRANSISTOR		Q9102	8-729-028-98	TRANSISTOR DTC114WUA-T106		
2529		H2	TRANSISTOR		Q9103	8-729-028-98	TRANSISTOR DTC114WUA-T106		
2530		H2	RESISTOR		R9101	1-216-815-11	METAL CHIP 330 5% 1/10W		
2531		H2	RESISTOR		R9103	1-216-820-11	METAL CHIP 820 5% 1/10W		
2532		H2	RESISTOR		R9107	1-216-817-11	METAL CHIP 470 5% 1/10W		
2533		H2	RESISTOR		R9108	1-216-805-11	METAL CHIP 47 5% 1/10W		
2534		H2	RESISTOR		R9110	1-216-820-11	METAL CHIP 820 5% 1/10W		
2535		H2	RESISTOR		R9111	1-216-295-91	SHORT CHIP 0		
2536		H2	SWITCH		S9101	1-554-419-00	SWITCH, PUSH (1 KEY)		
2537		H3	CAPACITOR		C9201	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
2538		H3	CAPACITOR		C9202	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
2539		H3	CAPACITOR		C9203	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
2540		H3	CAPACITOR		C9204	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
2541		H3	CAPACITOR		C9205	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
2542		H3	CAPACITOR		C9206	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
2543		H3	CAPACITOR		C9207	1-115-156-11	CERAMIC CHIP 1UF 10V		
2544		H3	CAPACITOR		C9208	1-115-156-11	CERAMIC CHIP 1UF 10V		
2545		H3	CAPACITOR		C9209	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
2546		H3	CAPACITOR		C9210	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
2547		H3	CAPACITOR		C9212	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
2548		H3	CAPACITOR		C9213	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
2549		H3	CAPACITOR		C9214	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
2550		H3	CAPACITOR		C9215	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
2551		H3	CONNECTOR		CN9201	1-695-209-21	PIN, CONNECTOR (PC BOARD) 15P		
2552		H3	DIODE		D9201	8-719-069-60	DIODE UDZSTE-179.1B		
2553		H3	DIODE		D9204	8-719-069-60	DIODE UDZSTE-179.1B		
2554		H3	DIODE		D9206	8-719-069-60	DIODE UDZSTE-179.1B		
2555		H3	DIODE		D9207	8-719-062-19	DIODE MA3200WA-TX		
2556		H3	DIODE		D9208	8-719-062-19	DIODE MA3200WA-TX		
2557		H3	DIODE		D9209	8-719-062-19	DIODE MA3200WA-TX		
2558		H3	JACK		J9201	1-770-328-21	JACK, PIN 3P		
2559		H3	JACK		J9202	1-568-267-11	JACK		
2560		H3	JACK		J9203	1-770-860-11	CONNECTOR, S TERMINAL		
2561		H3	RESISTOR		R9201	1-216-864-11	SHORT CHIP 0		
2562		H3	RESISTOR		R9202	1-216-815-11	METAL CHIP 330 5% 1/10W		
2563		H3	RESISTOR		R9203	1-216-864-11	SHORT CHIP 0		
2564		H3	RESISTOR		R9204	1-216-813-11	METAL CHIP 220 5% 1/10W		
2565		H3	RESISTOR		R9205	1-216-813-11	METAL CHIP 220 5% 1/10W		
2566		H3	RESISTOR		R9206	1-216-815-11	METAL CHIP 330 5% 1/10W		
2567		H3	RESISTOR		R9207	1-216-813-11	METAL CHIP 220 5% 1/10W		
2568		H3	RESISTOR		R9208	1-216-813-11	METAL CHIP 220 5% 1/10W		
2569		H3	RESISTOR		R9209	1-216-813-11	METAL CHIP 220 5% 1/10W		
2570		H3	RESISTOR		R9210	1-216-853-11	METAL CHIP 470K 5% 1/10W		
2571		H3	RESISTOR		R9211	1-216-813-11	METAL CHIP 220 5% 1/10W		
2572		H3	RESISTOR		R9212	1-216-809-11	METAL CHIP 100 5% 1/10W		
2573		H3	RESISTOR		R9213	1-216-853-11	METAL CHIP 470K 5% 1/10W		
2574		H3	RESISTOR		R9214	1-216-813-11	METAL CHIP 220 5% 1/10W		
2575		H3	RESISTOR		R9215	1-216-813-11	METAL CHIP 220 5% 1/10W		
2576		H3	RESISTOR		R9216	1-216-813-11	METAL CHIP 220 5% 1/10W		
2577		H3	RESISTOR		R9217	1-216-809-11	METAL CHIP 100 5% 1/10W		
2578		H3	RESISTOR		R9222	1-216-864-11	SHORT CHIP 0		
2579		H3	RESISTOR		R9223	1-216-809-11	METAL CHIP 100 5% 1/10W		
2580		H3	RESISTOR		R9224	1-216-797-11	METAL CHIP 10 5% 1/10W		
2581		H3	RESISTOR		R9225	1-216-797-11	METAL CHIP 10 5% 1/10W		
2582		H3	RESISTOR		R9226	1-216-809-11	METAL CHIP 100 5% 1/10W		
2583		H3	VARISTOR		VD9201	1-801-925-21	VARISTOR, CHIP (1608)		
2584		H3	VARISTOR		VD9202	1-801-925-21	VARISTOR, CHIP (1608)		
2585		H3	VARISTOR		VD9203	1-801-925-21	VARISTOR, CHIP (1608)		

