


Available link:


<http://mpd.southwestmicrowave.com/products/family.php?family=127>

Installation and Tools - Dielectric and Launch Pin or Launch Pin/Tab Transitions

For Flange Mount Connectors

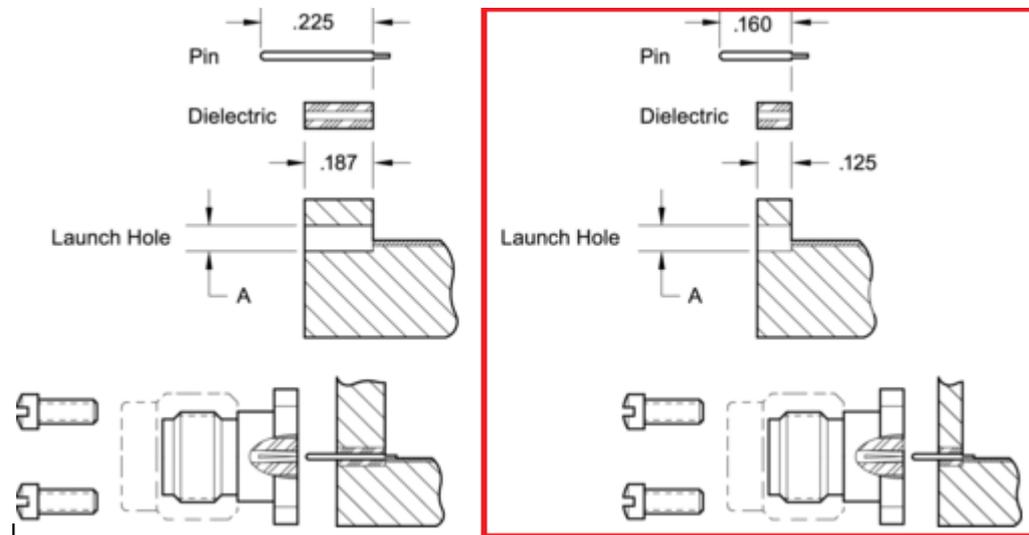

Recommended Launch Hole Dimensions

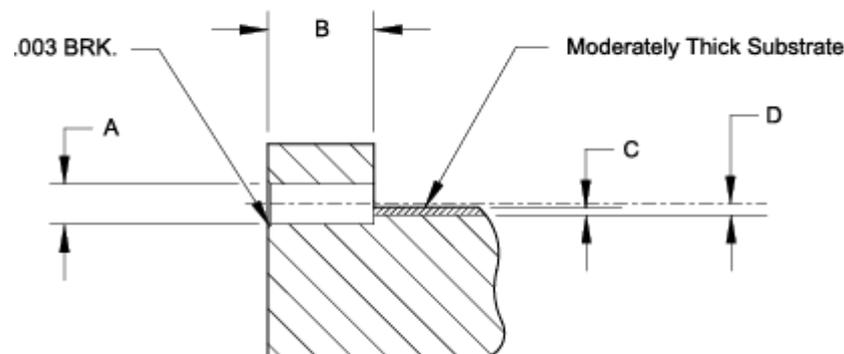

"C" = Substrate Thickness "D" = C + 1/2 Tab or Launch Terminal

For Pin Dia.	For Pin Length	"A" Dia. (Drill #) ± .0003	"B" ± .002
.036	.237	.116 #32	.187
.020	.160	.0635 #52	.125
.020	.225	.0635 #52	.187
.015	.160	.0492 1.25 mm	.125
.015	.225	.0492 1.25 mm	.187
.012	.160	.039 # 61	.125
.012	.225	.039 # 61	.187
.009	.160	.029 # 69	.125
.009	.225	.029 # 69	.187