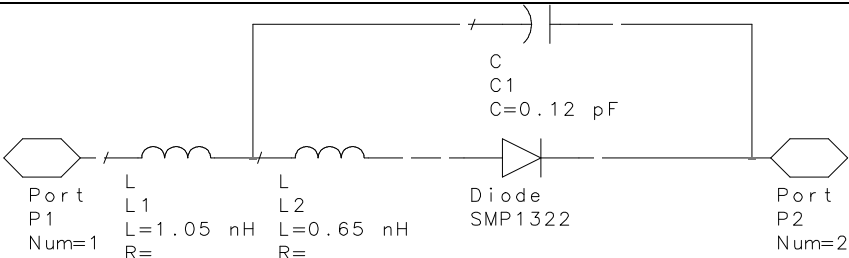
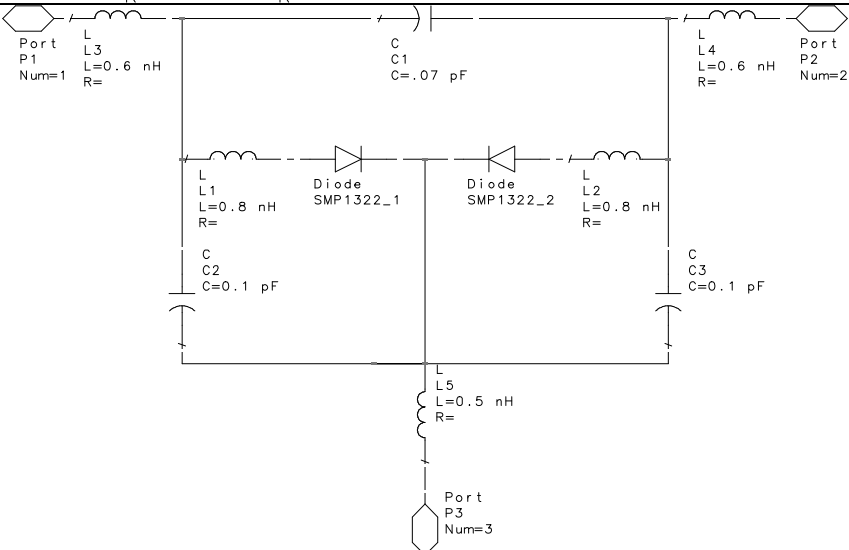
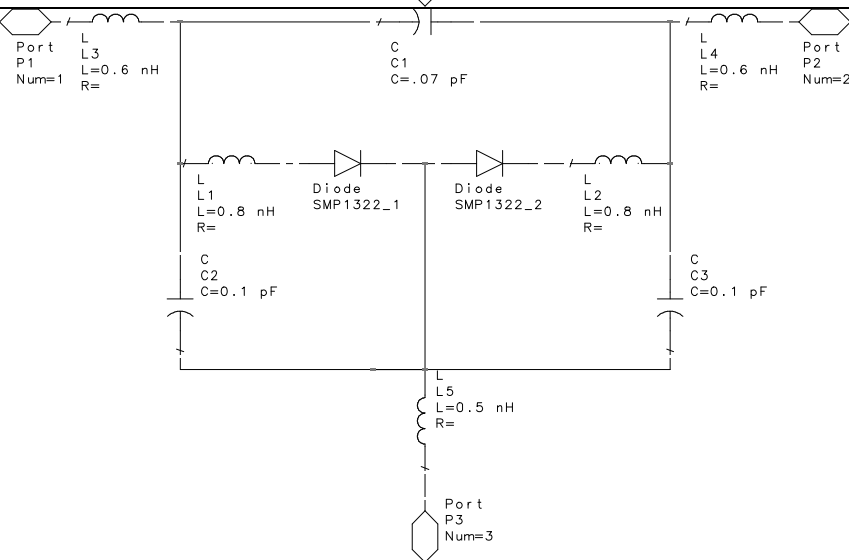


Package with Diode Layout (ADS)	Package Style	Package Part
 <p>Port P1 Num=1</p> <p>L1 L=1.05 nH R=</p> <p>L2 L=0.65 nH R=</p> <p>Diode SMP1322</p> <p>Port P2 Num=2</p> <p>C1 C=0.12 pF</p>	SOT-23	001
 <p>Port P1 Num=1</p> <p>L3 L=0.6 nH R=</p> <p>L1 L=0.8 nH R=</p> <p>Diode SMP1322_1</p> <p>Diode SMP1322_2</p> <p>L2 L=0.8 nH R=</p> <p>L4 L=0.6 nH R=</p> <p>Port P2 Num=2</p> <p>C2 C=0.1 pF</p> <p>C3 C=0.1 pF</p> <p>C1 C=0.07 pF</p> <p>L5 L=0.5 nH R=</p> <p>Port P3 Num=3</p>	SOT-23	004
 <p>Port P1 Num=1</p> <p>L3 L=0.6 nH R=</p> <p>L1 L=0.8 nH R=</p> <p>Diode SMP1322_1</p> <p>Diode SMP1322_2</p> <p>L2 L=0.8 nH R=</p> <p>L4 L=0.6 nH R=</p> <p>Port P2 Num=2</p> <p>C2 C=0.1 pF</p> <p>C3 C=0.1 pF</p> <p>C1 C=0.07 pF</p> <p>L5 L=0.5 nH R=</p> <p>Port P3 Num=3</p>	SOT-23	005

<p>Port P1 Num=1</p> <p>L3 L=0.5 nH R=</p> <p>C1 C=0.1 pF</p> <p>L4 L=0.5 nH R=</p> <p>Port P2 Num=2</p> <p>L1 L=0.6 nH R=</p> <p>Diode SMP1322</p> <p>C2 C=0.1 pF</p> <p>C3 C=0.1 pF</p> <p>L2 L=0.6 nH R=</p> <p>L5 L=0.4 nH R=</p> <p>Port P3 Num=3</p>	SOT-23	007
<p>Port P1 Num=1</p> <p>L1 L=1.25 nH R=</p> <p>L2 L=0.55 nH R=</p> <p>C1 C=0.11 pF</p> <p>Diode SMP1322</p> <p>Port P2 Num=2</p>	SOD-323	011
<p>Port P1 Num=1</p> <p>L1 L=0.4 nH R=</p> <p>C1 C=0.01 pF</p> <p>Port P2 Num=2</p> <p>L2 L=0.4 nH R=</p> <p>C2 C=0.15 pF</p> <p>Port P3 Num=3</p> <p>L3 L=0.6 nH R=</p> <p>C3 C=0.01 pF</p> <p>Port P4 Num=4</p> <p>L4 L=0.6 nH R=</p> <p>C4 C=0.2 pF</p> <p>C5 C=0.06 pF</p> <p>C6 C=0.05 pF</p> <p>Diode SMP1322_1</p> <p>Diode SMP1322_2</p> <p>L5 L=0.5 nH R=</p> <p>L6 L=0.5 nH R=</p> <p>L7 L=0.5 nH R=</p>	SOT-143	016

<p>Port P1 Num=1</p> <p>L10 L=0.5 nH R=</p> <p>C12 C=25 fF</p> <p>L20 L=0.5 nH R=</p> <p>Port P2 Num=2</p> <p>L11 L=0.5 nH R=</p> <p>Diode SMP1322</p> <p>C13 C=0.2 pF</p> <p>L31 L=0.15 nH R=</p> <p>C23 C=0.2 pF</p> <p>L30 L=0.05 nH R=</p> <p>Port P3 Num=3</p>	SOT-143	017
<p>Port P1 Num=1</p> <p>L3 L=0.5 nH R=</p> <p>C1 C=.07 pF</p> <p>L4 L=0.5 nH R=</p> <p>Port P2 Num=2</p> <p>L1 L=0.7 nH R=</p> <p>Diode SMP1322_1</p> <p>C2 C=0.1 pF</p> <p>L2 L=0.7 nH R=</p> <p>Diode SMP1322_2</p> <p>C3 C=0.1 pF</p> <p>L5 L=0.5 nH R=</p> <p>Port P3 Num=3</p>	SC-70	074

<p>Port P1 Num=1</p> <p>L3 L=0.5 nH R=</p> <p>C1 C=.07 pF</p> <p>L4 L=0.5 nH R=</p> <p>Port P2 Num=2</p> <p>L1 L=0.7 nH R=</p> <p>Diode SMP1322_1</p> <p>L2 L=0.7 nH R=</p> <p>C2 C=0.1 pF</p> <p>C3 C=0.1 pF</p> <p>L5 L=0.5 nH R=</p> <p>Port P3 Num=3</p>	SC-70	075
<p>Port P1 Num=1</p> <p>L1 L=0.25 nH R=</p> <p>L2 L=0.45 nH R=</p> <p>Diode SMP1322</p> <p>C1 C=0.1 pF</p> <p>Port P2 Num=2</p>	SC-79	079
<p>Port P1 Num=1</p> <p>Lp L=0.05 nH R=</p> <p>Ls L=0.25 nH R=</p> <p>Diode SMP1322</p> <p>Cp C=0.1 pF</p> <p>Port P2 Num=2</p>	ChipScale	