

A



Good for Battery Powered Applications

Soft Startup: 0.8ms


UVLO Vin falling 2.1 2.2 2.3 V

UVLO Vin rising 2.3 2.4 2.5 V

has UVLO protection, connect EN to VIN or EFUS?

In first case PG can be used for Powering on LPLP5907 (Requires testing)


Supply Voltage: 3.8V

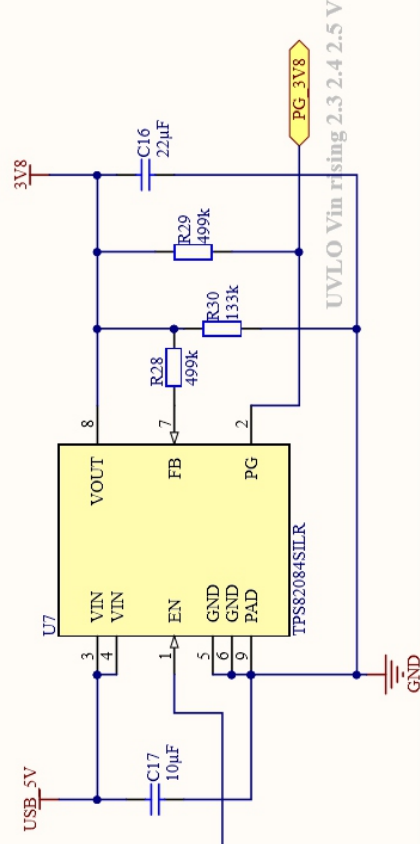

Good for Battery Powered Applications

Supply Voltage: 3.3V

The input capacitor should be at least equal to, or greater than, the output capacitor for good load transient performance.

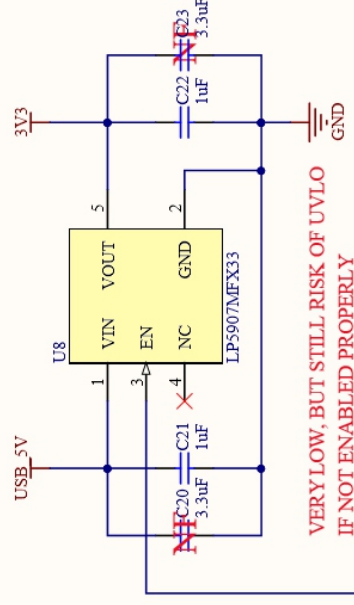

Supply Voltage: 3.8V (Alternative Supply)