



CGH40010F
WOLFSPEED

Buy Now



Looking for a discount?

[Check out our current promotions!](#)

Give us a call

1-855-837-4225

International: 1-415-281-3866

Email Us

Sales and New Orders: sales@verical.com

Order Support: support@verical.com

Suppliers: [Visit our seller page](#)

Company Address

Arrow Electronics, Inc
9201 East Dry Creek Road
Centennial, CO 80112


This coversheet was created by Verical, a division of Arrow Electronics, Inc. ("Verical"). The attached document was created by the part supplier, not Verical, and is provided strictly 'as is.' Verical, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

CGH40010

10 W, DC - 6 GHz, RF Power GaN HEMT

Description

WolfSpeed's CGH40010 is an unmatched, gallium nitride (GaN) high electron mobility transistor (HEMT). The CGH40010, operating from a 28 volt rail, offers a general purpose, broadband solution to a variety of RF and microwave applications. GaN HEMTs offer high efficiency, high gain and wide bandwidth capabilities making the CGH40010 ideal for linear and compressed amplifier circuits. The transistor is available in both screw-down, flange and solder-down, pill packages.

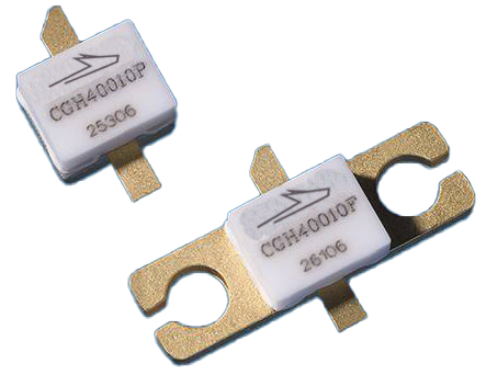

Package Type: 440166 & 440196
PNs: CGH40010F & CGH40010P

Features

- Up to 6 GHz Operation
- 16 dB Small Signal Gain at 2.0 GHz
- 14 dB Small Signal Gain at 4.0 GHz
- 13 W typical P_{SAT}
- 65 % Efficiency at P_{SAT}
- 28 V Operation

Applications

- 2-Way Private Radio
- Broadband Amplifiers
- Cellular Infrastructure
- Test Instrumentation
- Class A, AB, Linear amplifiers suitable for OFDM, W-CDMA, EDGE, CDMA waveforms



Large Signal Models Available for ADS and MWO





Absolute Maximum Ratings (not simultaneous) at 25°C Case Temperature

Parameter	Symbol	Rating	Units	Conditions
Drain-Source Voltage	V_{DS}	120	V	25°C
Gate-to-Source Voltage	V_{GS}	-10, +2		
Storage Temperature	T_{STG}	-65, +150	°C	
Operating Junction Temperature	T_J	225		
Maximum Forward Gate Current	I_{GMAX}	4.0	mA	25°C
Maximum Drain Current ¹	I_{DMAX}	1.5	A	
Soldering Temperature ²	T_S	245	°C	
Screw Torque	τ	40	in-oz	
Thermal Resistance, Junction to Case ³	$R_{\theta JC}$	8.0	°C/W	85°C
Case Operating Temperature ^{3,4}	T_C	-40, +150	°C	

Notes:

¹ Current limit for long term, reliable operation

² Refer to the Application Note on soldering at wolfspeed.com/rf/document-library

³ Measured for the CGH40010F at $P_{DISS} = 14$ W.

⁴ See also, the Power Dissipation De-rating Curve on Page 7.

Electrical Characteristics ($T_C = 25^\circ\text{C}$)

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
DC Characteristics¹						
Gate Threshold Voltage	$V_{GS(th)}$	-3.8	-3.0	-2.3	V_{DC}	$V_{DS} = 10$ V, $I_D = 3.6$ mA
Gate Quiescent Voltage	$V_{GS(Q)}$	—	-2.7	—		$V_{DS} = 28$ V, $I_D = 200$ mA
Saturated Drain Current	I_{DS}	2.9	3.5	—	A	$V_{DS} = 6.0$ V, $V_{GS} = 2.0$ V
Drain-Source Breakdown Voltage	V_{BR}	84	—	—	V_{DC}	$V_{GS} = -8$ V, $I_D = 3.6$ mA
RF Characteristics² ($T_C = 25^\circ\text{C}$, $F_0 = 3.7$ GHz unless otherwise noted)						
Small Signal Gain	G_{SS}	12.5	14.5	—	dB	$V_{DD} = 28$ V, $I_{DQ} = 200$ mA
Power Output ³	P_{SAT}	10	12.5	—	W	
Drain Efficiency ⁴	η	55	65	—	%	$V_{DD} = 28$ V, $I_{DQ} = 200$ mA, P_{SAT}
Output Mismatch Stress	VSWR	—	—	10:1	Ψ	No damage at all phase angles, $V_{DD} = 28$ V, $I_{DQ} = 200$ mA, $P_{OUT} = 10$ W CW
Dynamic Characteristics						
Input Capacitance	C_{GS}	—	4.5	—	pF	$V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz
Output Capacitance	C_{DS}	—	1.3	—		
Feedback Capacitance	C_{GD}	—	0.2	—		

Notes:

¹ Measured on wafer prior to packaging.

² Measured in CGH40010-AMP.

³ P_{SAT} is defined as $I_G = 0.36$ mA.

⁴ Drain Efficiency = P_{OUT} / P_{DC}

Typical Performance

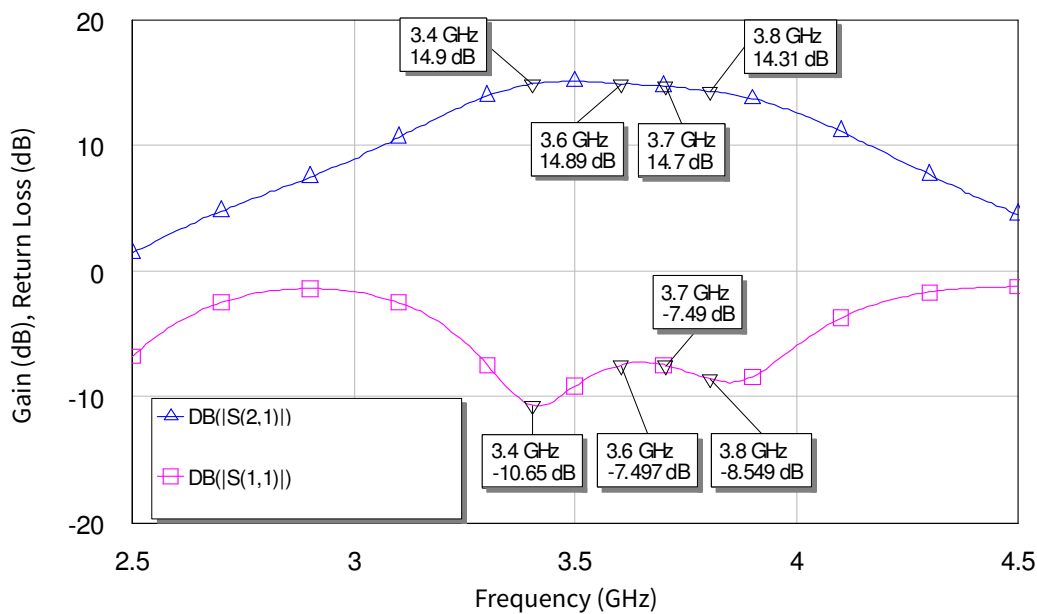


Figure 1. Small Signal Gain and Return Loss vs Frequency of the CGH40010 in the CGH40010-AMP

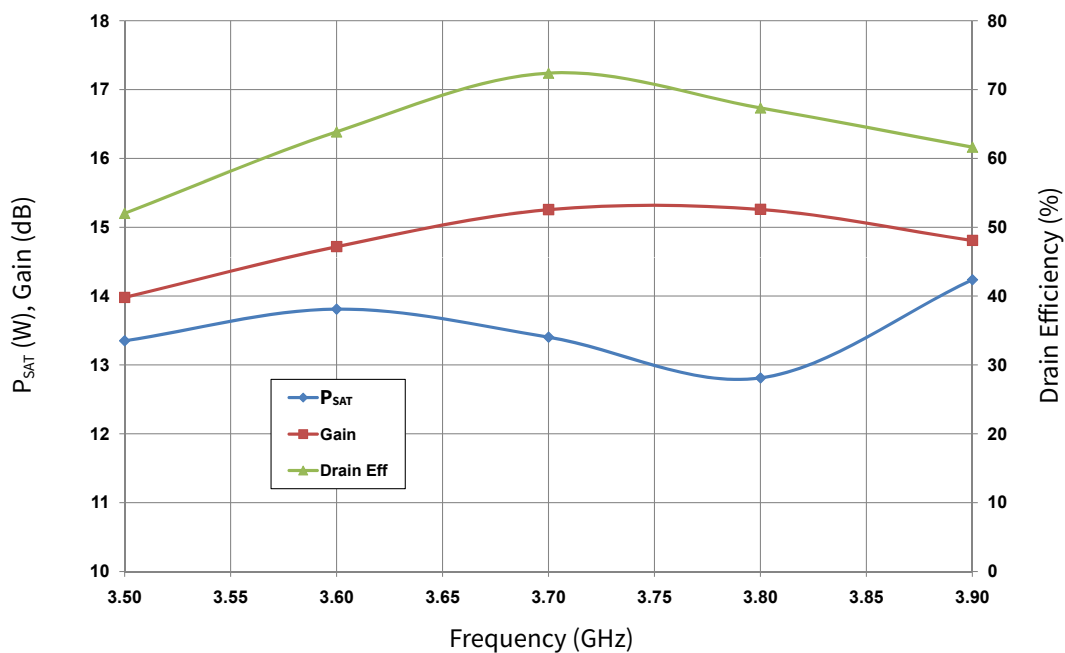


Figure 2. P_{SAT} , Gain, and Drain Efficiency vs Frequency of the CGH40010F in the CGH40010-AMP

$V_{DD} = 28 \text{ V}$, $I_{DQ} = 200 \text{ mA}$

Typical Performance

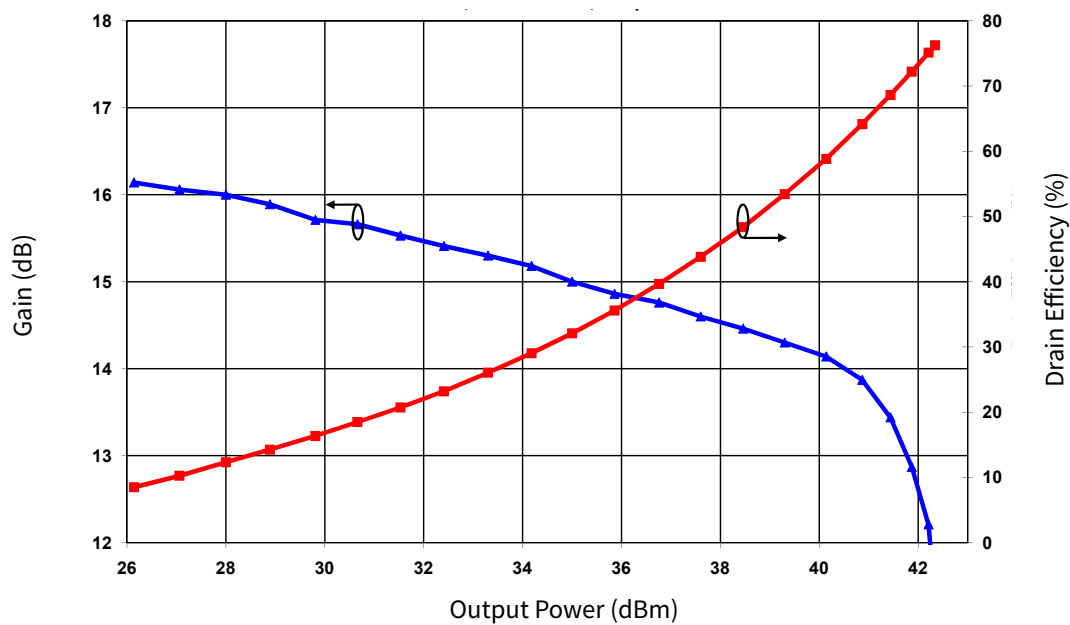


Figure 3. Swept CW Data of CGH40010F vs. Output Power with Source and Load Impedances Optimized for Drain Efficiency at 2.0 GHz
 $V_{DD} = 28 \text{ V}$, $I_{DQ} = 200 \text{ mA}$

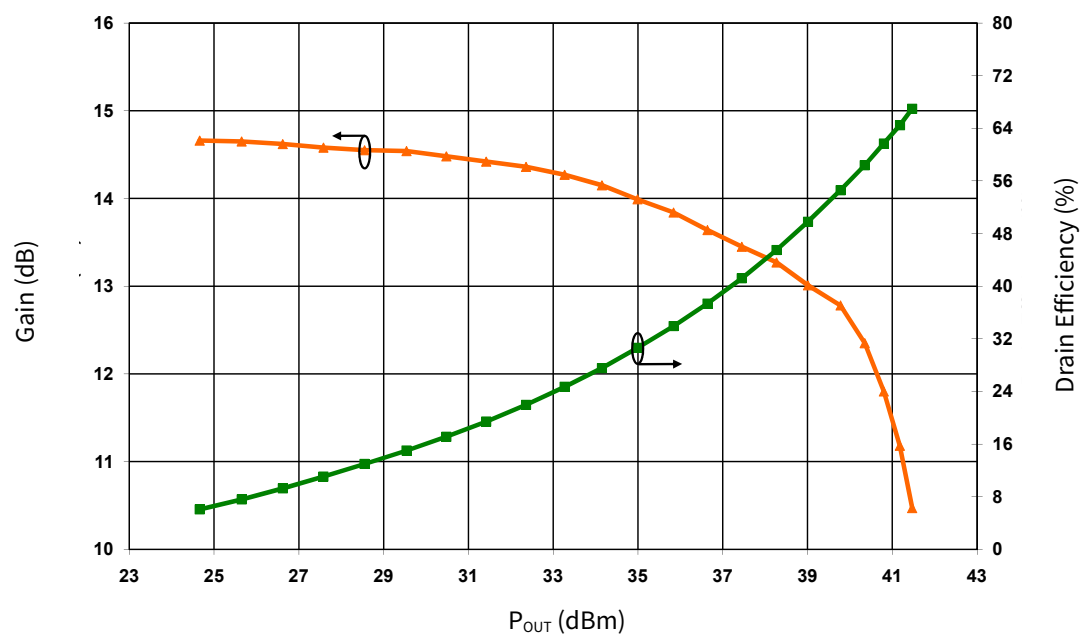


Figure 4. Swept CW Data of CGH40010F vs. Output Power with Source and Load Impedances Optimized for Drain Efficiency at 3.6 GHz
 $V_{DD} = 28 \text{ V}$, $I_{DQ} = 200 \text{ mA}$

Typical Performance

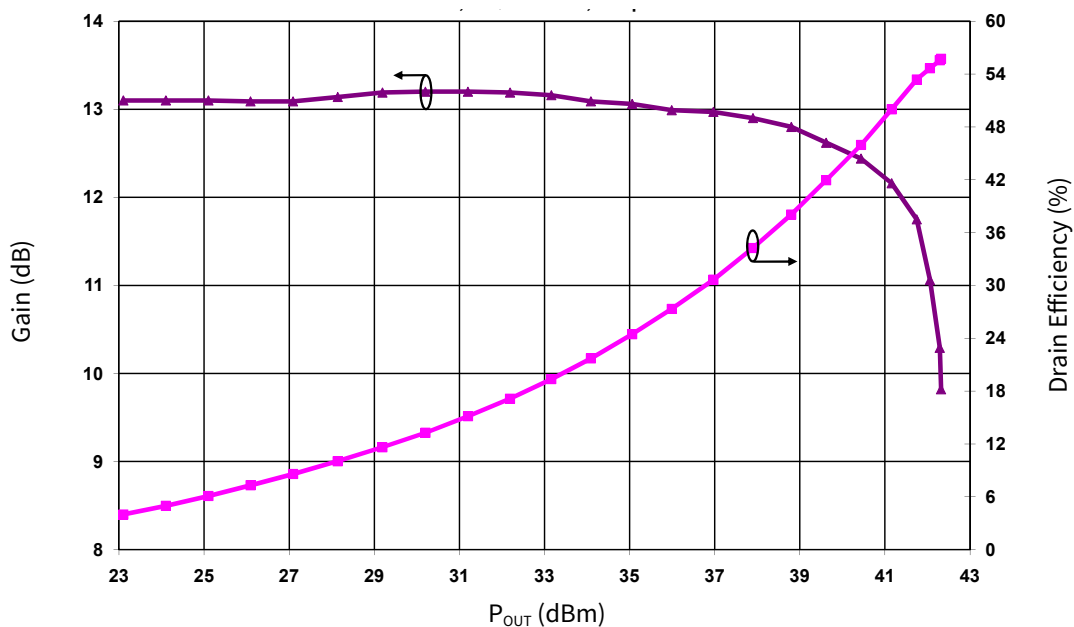


Figure 5. Swept CW Data of CGH40010F vs. Output Power with Source and Load Impedances Optimized for P1 Power at 3.6 GHz
 $V_{DD} = 28$ V, $I_{DQ} = 200$ mA

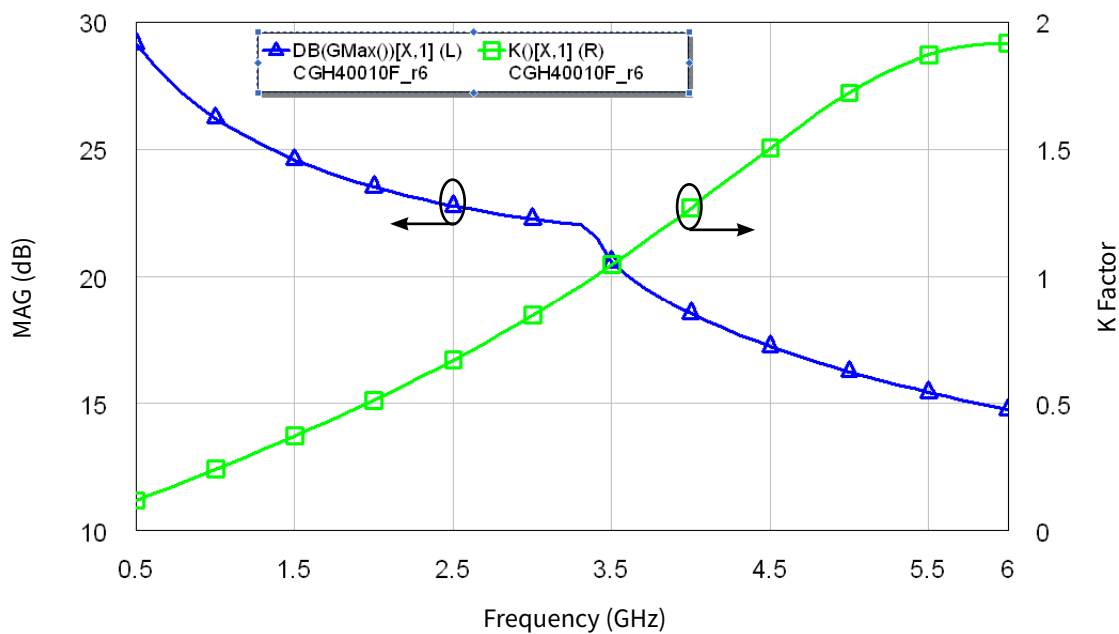


Figure 6. Simulated Maximum Available Gain and K Factor of the CGH40010F
 $V_{DD} = 28$ V, $I_{DQ} = 200$ mA

Typical Noise Performance

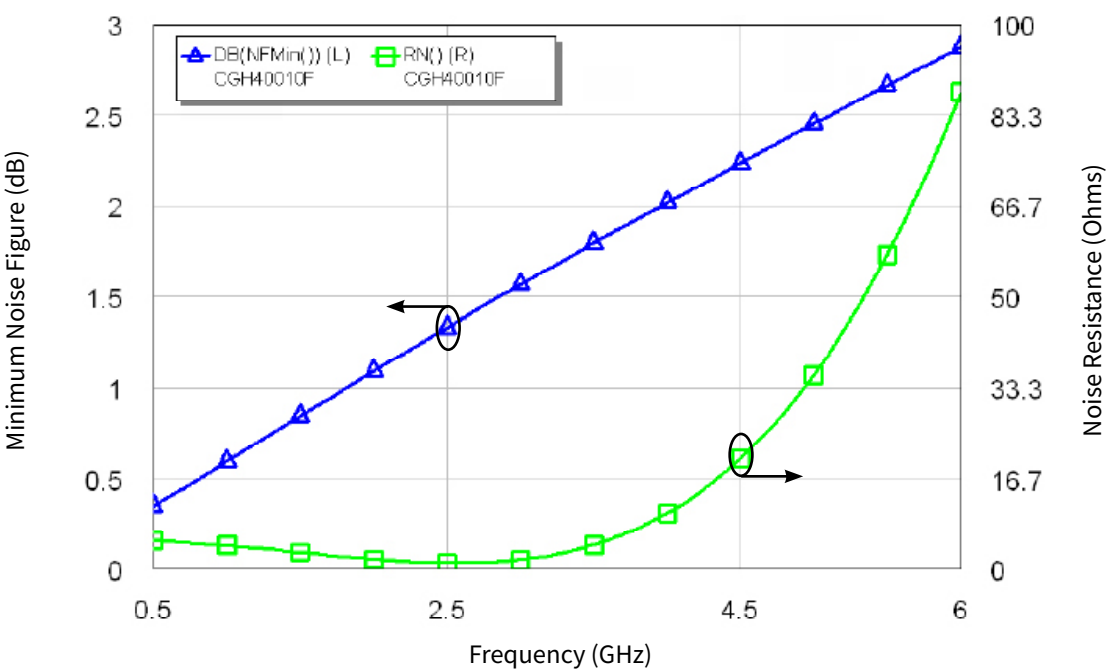



Figure 7. Simulated Minimum Noise Figure and Noise Resistance vs Frequency of the CGH40010F
 $V_{DD} = 28\text{ V}$, $I_{DQ} = 100\text{ mA}$

Electrostatic Discharge (ESD) Classifications

Parameter	Symbol	Class	Classification Level	Test Methodology
Human Body Model	HBM	TBD	ANSI/ESDA/JEDEC JS-001 Table 3	JEDEC JESD22 A114-D
Charge Device Model	CDM	TBD	ANSI/ESDA/JEDEC JS-001 Table 3	JEDEC JESD22 C101-C




Source and Load Impedances

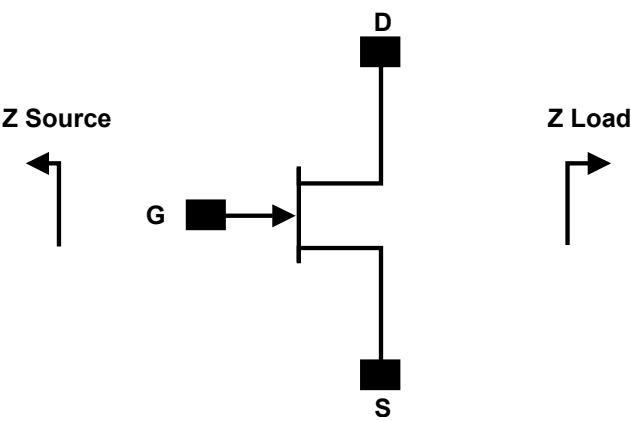

Frequency (MHz)	Z Source	Z Lead
500	20.2 + j16.18	51.7 + j15.2
1000	8.38 + j9.46	41.4 + j28.5
1500	7.37 + j0	28.15 + j29
2500	3.19 - j4.76	19 + j9.2
3500	3.18 - j13.3	14.6 + j7.45

Notes:
¹ V_{DD} = 28V, I_{DQ} = 200mA in the 440166 package.
² Optimized for power, gain, P_{SAT} and PAE.
³ When using this device at low frequency, series resistors should be used to maintain amplifier stability.

CGH40010 Power Dissipation De-rating Curve

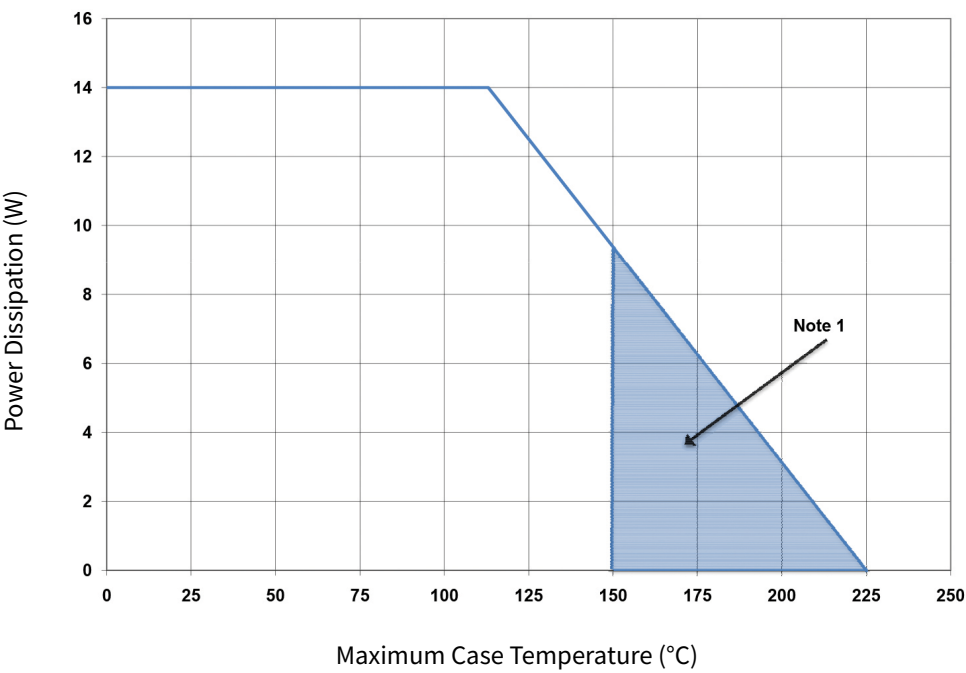


Note:
¹ Area exceeds Maximum Case Operating Temperature (See Page 2).



CGH40010-AMP Demonstration Amplifier Circuit Bill of Materials


Designator	Description	Qty
R1, R2	RES, 1/16W, 0603, 1%, 0 OHMS	1
R3	RES, 1/16W, 0603, 1%, 47 OHMS	1
R4	RES, 1/16W, 0603, 1%, 100 OHMS	1
C6	CAP, 470pF, 5%, 100V, 0603	1
C17	CAP, 33μF, 20%, G CASE	1
C16	CAP, 1.0μF, 100V, 10%, X7R, 1210	1
C8	CAP, 10μF, 16V, TANTALUM	1
C14	CAP, 100.0pF, +/-5%, 0603	1
C1	CAP, 0.5pF, +/-0.05pF, 0603	1
C2	CAP, 0.7pF, +/-0.1pF, 0603	1
C10, C11	CAP, 1.0pF, +/-0.1pF, 0603	2
C4, C12	CAP, 10.0pF, +/-5%, 0603	2
C5, C13	CAP, 39pF, +/-5%, 0603	2
C7, C15	CAP, 33000pF, 0805, 100V, X7R	2
J3, J4	CONN SMA STR PANEL JACK RECP	1
J2	HEADER RT>PLZ.1CEN LK 2 POS	1
J1	HEADER RT>PLZ.1CEN LK 5POS	1
-	PCB, RO4350B, Er = 3.48, h = 20 mil	1
-	STAINLESS STEEL, SOCKET HEAD SCREWS, TYPE 2-56, LENGTH 1/4"	2
Q1	CGH40010F or CGH40010P	1

CGH40010-AMP Demonstration Amplifier Circuit

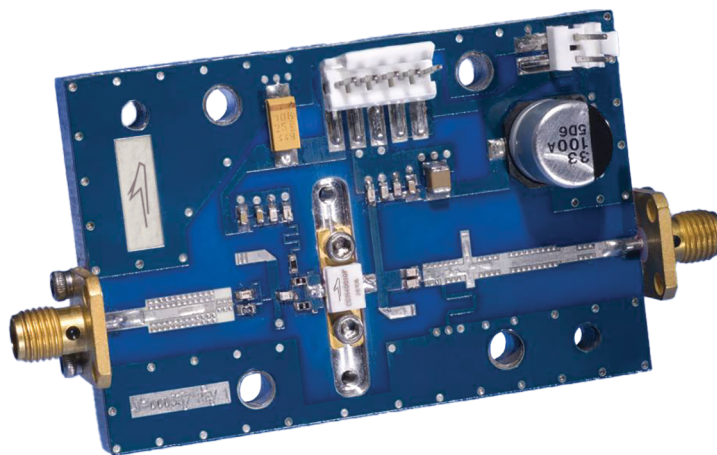




CGH40010-AMP Demonstration Amplifier Circuit Schematic

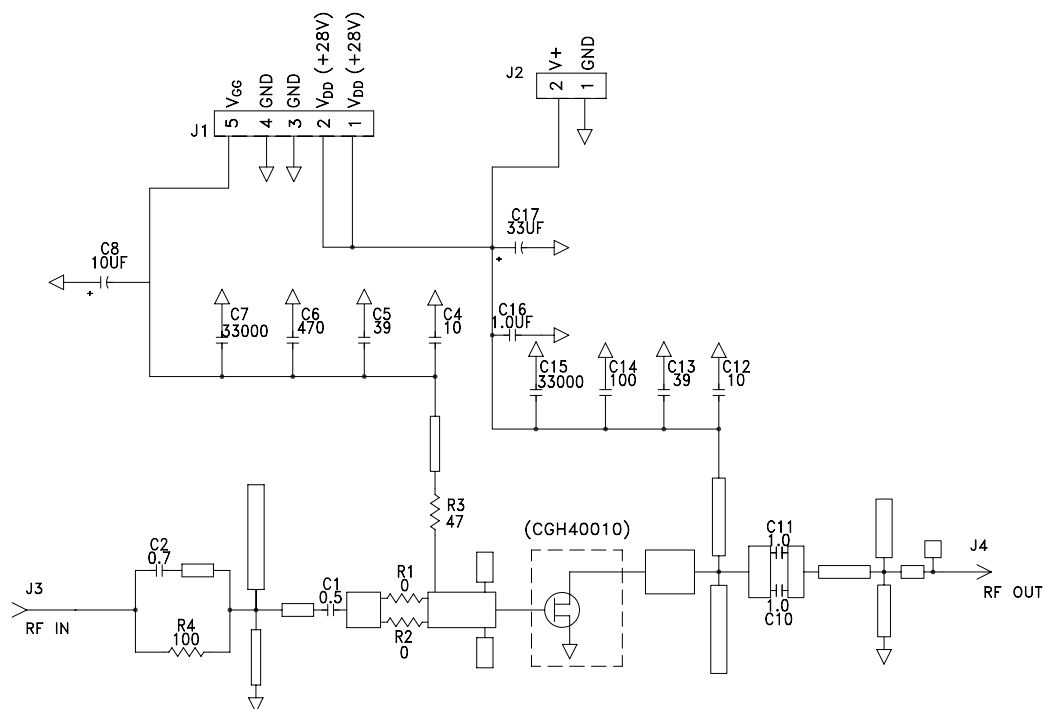

CGH40010-AMP Demonstration Amplifier Circuit Outline

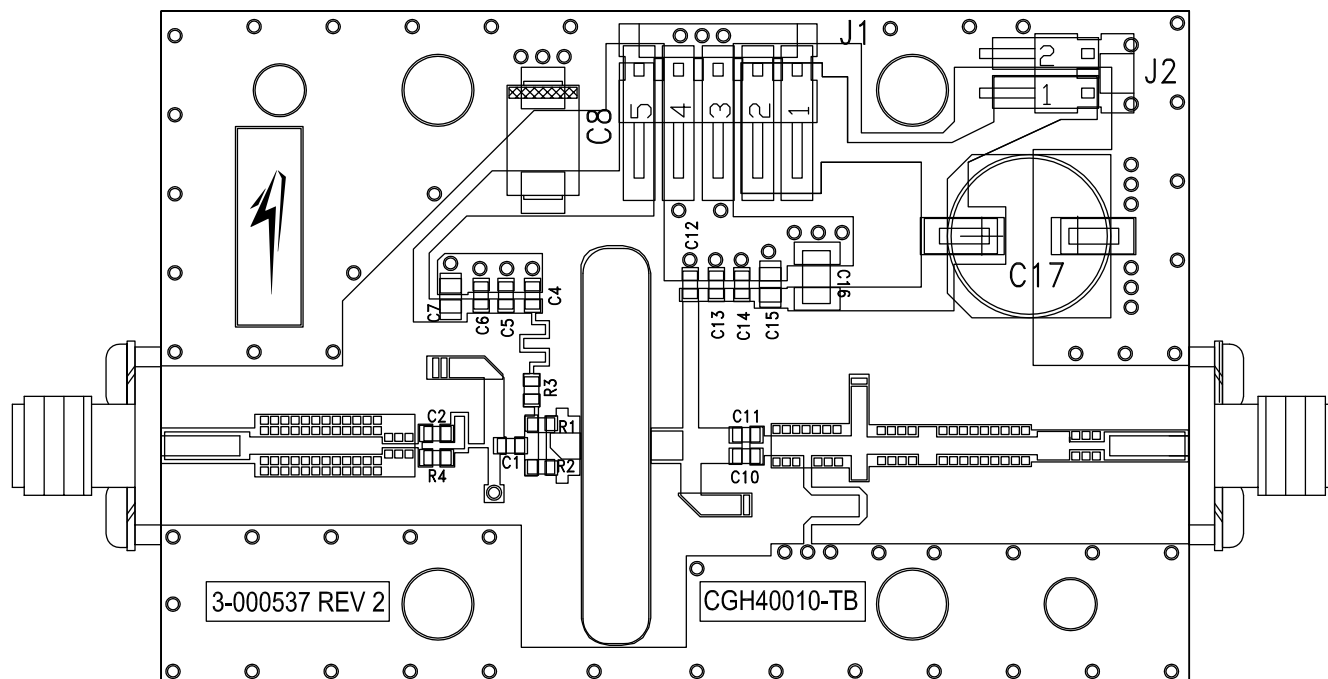



Typical Package S-Parameters for CGH40010
(Small Signal, $V_{DS} = 28$ V, $I_{DQ} = 100$ mA, angle in degrees)

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
500 MHz	0.909	-123.34	17.19	108.22	0.027	21.36	0.343	-90.81
600 MHz	0.902	-133.06	14.86	101.82	0.028	15.60	0.329	-98.65
700 MHz	0.897	-140.73	13.04	96.45	0.028	10.87	0.321	-104.84
800 MHz	0.894	-146.96	11.58	91.78	0.029	6.84	0.317	-109.84
900 MHz	0.891	-152.16	10.41	87.61	0.029	3.33	0.316	-113.95
1.0 GHz	0.890	-156.60	9.43	83.82	0.029	0.19	0.318	-117.42
1.1 GHz	0.889	-160.47	8.62	80.31	0.029	-2.66	0.321	-120.40
1.2 GHz	0.888	-163.90	7.93	77.02	0.029	-5.28	0.326	-123.02
1.3 GHz	0.887	-166.99	7.34	73.90	0.029	-7.72	0.332	-125.36
1.4 GHz	0.887	-169.80	6.82	70.92	0.029	-10.01	0.338	-127.51
1.5 GHz	0.887	-172.39	6.38	68.05	0.029	-12.18	0.345	-129.50
1.6 GHz	0.887	-174.80	5.98	65.28	0.028	-14.24	0.353	-131.37
1.7 GHz	0.887	-177.07	5.63	62.59	0.028	-16.21	0.360	-133.15
1.8 GHz	0.887	-179.22	5.32	59.97	0.028	-18.09	0.369	-134.87
1.9 GHz	0.887	-178.73	5.04	57.41	0.028	-19.91	0.377	-136.54
2.0 GHz	0.888	-176.76	4.78	54.89	0.027	-21.66	0.385	-138.17
2.1 GHz	0.888	-174.86	4.55	52.42	0.027	-23.35	0.393	-139.77
2.2 GHz	0.888	-173.02	4.34	49.99	0.027	-24.98	0.402	-141.34
2.3 GHz	0.888	-171.23	4.15	47.60	0.026	-26.56	0.410	-142.90
2.4 GHz	0.889	-169.48	3.97	45.24	0.026	-28.08	0.418	-144.45
2.5 GHz	0.889	-167.76	3.81	42.90	0.026	-29.55	0.426	-145.99
2.6 GHz	0.890	-166.07	3.66	40.59	0.025	-30.98	0.434	-147.53
2.7 GHz	0.890	-164.39	3.53	38.30	0.025	-32.36	0.442	-149.06
2.8 GHz	0.890	-162.74	3.40	36.03	0.025	-33.69	0.450	-150.59
2.9 GHz	0.891	-161.10	3.28	33.78	0.024	-34.97	0.458	-152.12
3.0 GHz	0.891	-159.46	3.17	31.55	0.024	-36.20	0.465	-153.65
3.2 GHz	0.892	-156.21	2.97	27.12	0.023	-38.51	0.479	-156.72
3.4 GHz	0.893	-152.96	2.79	22.73	0.022	-40.63	0.493	-159.80
3.6 GHz	0.893	-149.69	2.64	18.38	0.022	-42.52	0.505	-162.90
3.8 GHz	0.894	-146.38	2.50	14.05	0.021	-44.17	0.517	-166.03
4.0 GHz	0.894	-143.03	2.38	9.72	0.020	-45.56	0.527	-169.19
4.2 GHz	0.894	-139.61	2.28	5.40	0.019	-46.67	0.537	-172.39
4.4 GHz	0.895	-136.11	2.18	1.07	0.019	-47.46	0.546	-175.64
4.6 GHz	0.895	-132.53	2.09	-3.29	0.018	-47.90	0.554	-178.95
4.8 GHz	0.895	-128.85	2.01	-7.68	0.017	-47.96	0.561	-177.69
5.0 GHz	0.895	-125.06	1.94	-12.10	0.017	-47.61	0.568	-174.25
5.2 GHz	0.895	-121.15	1.88	-16.58	0.016	-46.84	0.573	-170.72
5.4 GHz	0.895	-117.11	1.82	-21.12	0.016	-45.67	0.578	-167.10
5.6 GHz	0.895	-112.94	1.77	-25.73	0.015	-44.12	0.582	-163.38
5.8 GHz	0.895	-108.62	1.72	-30.42	0.015	-42.30	0.586	-159.54
6.0 GHz	0.895	-104.15	1.68	-35.20	0.015	-40.33	0.589	-155.56

To download the s-parameters in s2p format, go to the [CGH40010](#) Product page and click on the documentation tab.



Typical Package S-Parameters for CGH40010
(Small Signal, $V_{DS} = 28$ V, $I_{DQ} = 200$ mA, angle in degrees)

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
500 MHz	0.911	-130.62	18.41	105.41	0.022	19.44	0.303	-112.24
600 MHz	0.906	-139.65	15.80	99.47	0.023	14.31	0.299	-119.83
700 MHz	0.902	-146.70	13.80	94.50	0.023	10.17	0.298	-125.50
800 MHz	0.899	-152.41	12.22	90.19	0.023	6.68	0.299	-129.85
900 MHz	0.898	-157.17	10.96	86.34	0.024	3.67	0.302	-133.28
1.0 GHz	0.896	-161.24	9.92	82.82	0.024	0.99	0.305	-136.05
1.1 GHz	0.896	-164.79	9.06	79.56	0.024	-1.41	0.309	-138.34
1.2 GHz	0.895	-167.95	8.33	76.49	0.024	-3.62	0.314	-140.30
1.3 GHz	0.895	-170.80	7.70	73.57	0.023	-5.66	0.320	-142.01
1.4 GHz	0.894	-173.41	7.17	70.78	0.023	-7.56	0.326	-143.54
1.5 GHz	0.894	-175.82	6.70	68.08	0.023	-9.35	0.332	-144.94
1.6 GHz	0.894	-178.09	6.28	65.47	0.023	-11.05	0.338	-146.24
1.7 GHz	0.894	-179.78	5.92	62.92	0.023	-12.66	0.345	-147.48
1.8 GHz	0.894	-177.75	5.59	60.43	0.023	-14.19	0.352	-148.68
1.9 GHz	0.894	-175.81	5.30	57.99	0.023	-15.65	0.358	-149.84
2.0 GHz	0.894	-173.94	5.04	55.59	0.022	-17.05	0.365	-150.99
2.1 GHz	0.894	-172.13	4.80	53.23	0.022	-18.39	0.372	-152.12
2.2 GHz	0.894	-170.37	4.58	50.91	0.022	-19.67	0.379	-153.26
2.3 GHz	0.895	-168.65	4.38	48.61	0.022	-20.90	0.386	-154.39
2.4 GHz	0.895	-166.96	4.20	46.33	0.021	-22.08	0.393	-155.54
2.5 GHz	0.895	-165.30	4.03	44.08	0.021	-23.20	0.400	-156.69
2.6 GHz	0.895	-163.66	3.88	41.84	0.021	-24.27	0.407	-157.85
2.7 GHz	0.895	-162.04	3.74	39.63	0.021	-25.28	0.414	-159.03
2.8 GHz	0.895	-160.43	3.60	37.43	0.020	-26.25	0.420	-160.22
2.9 GHz	0.896	-158.83	3.48	35.24	0.020	-27.16	0.427	-161.42
3.0 GHz	0.896	-157.24	3.37	33.06	0.020	-28.02	0.433	-162.64
3.2 GHz	0.896	-154.06	3.16	28.74	0.019	-29.57	0.446	-165.13
3.4 GHz	0.896	-150.87	2.98	24.44	0.019	-30.88	0.457	-167.69
3.6 GHz	0.896	-147.66	2.82	20.16	0.018	-31.95	0.468	-170.31
3.8 GHz	0.897	-144.41	2.68	15.89	0.018	-32.76	0.478	-173.00
4.0 GHz	0.897	-141.10	2.56	11.61	0.017	-33.30	0.488	-175.77
4.2 GHz	0.897	-137.72	2.45	7.33	0.017	-33.55	0.497	-178.61
4.4 GHz	0.897	-134.26	2.35	3.03	0.017	-33.50	0.505	-178.47
4.6 GHz	0.897	-130.71	2.26	-1.31	0.016	-33.18	0.512	-175.46
4.8 GHz	0.896	-127.06	2.17	-5.68	0.016	-32.58	0.518	-172.36
5.0 GHz	0.896	-123.30	2.10	-10.09	0.016	-31.74	0.524	-169.16
5.2 GHz	0.896	-119.42	2.04	-14.57	0.016	-30.72	0.529	-165.86
5.4 GHz	0.896	-115.41	1.98	-19.10	0.016	-29.60	0.534	-162.44
5.6 GHz	0.896	-111.26	1.92	-23.71	0.016	-28.46	0.537	-158.89
5.8 GHz	0.895	-106.97	1.87	-28.40	0.017	-27.41	0.540	-155.20
6.0 GHz	0.895	-102.53	1.82	-33.19	0.017	-26.54	0.543	-151.36

To download the s-parameters in s2p format, go to the [CGH40010](#) Product page and click on the documentation tab.




Typical Package S-Parameters for CGH40010
(Small Signal, $V_{DS} = 28$ V, $I_{DQ} = 500$ mA, angle in degrees)

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
500 MHz	0.914	-135.02	18.58	103.70	0.020	18.36	0.300	-126.80
600 MHz	0.909	-143.57	15.88	98.05	0.020	13.67	0.302	-133.51
700 MHz	0.906	-150.23	13.83	93.33	0.021	9.90	0.304	-138.40
800 MHz	0.904	-155.61	12.23	89.23	0.021	6.77	0.307	-142.08
900 MHz	0.903	-160.09	10.95	85.56	0.021	4.08	0.311	-144.94
1.0 GHz	0.902	-163.93	9.91	82.21	0.021	1.71	0.314	-147.23
1.1 GHz	0.901	-167.29	9.04	79.09	0.021	-0.41	0.319	-149.10
1.2 GHz	0.901	-170.29	8.31	76.15	0.021	-2.35	0.323	-150.69
1.3 GHz	0.900	-173.00	7.69	73.35	0.021	-4.12	0.328	-152.07
1.4 GHz	0.900	-175.50	7.15	70.66	0.021	-5.78	0.333	-153.29
1.5 GHz	0.900	-177.81	6.69	68.07	0.021	-7.32	0.338	-154.41
1.6 GHz	0.900	-179.98	6.27	65.54	0.021	-8.77	0.344	-155.44
1.7 GHz	0.900	177.96	5.91	63.08	0.020	-10.15	0.349	-156.43
1.8 GHz	0.899	176.00	5.59	60.67	0.020	-11.45	0.355	-157.38
1.9 GHz	0.899	174.12	5.30	58.30	0.020	-12.68	0.361	-158.30
2.0 GHz	0.899	172.31	5.04	55.97	0.020	-13.85	0.366	-159.22
2.1 GHz	0.899	170.54	4.80	53.67	0.020	-14.96	0.372	-160.14
2.2 GHz	0.900	168.83	4.58	51.40	0.020	-16.01	0.378	-161.06
2.3 GHz	0.900	167.15	4.39	49.16	0.019	-17.01	0.384	-161.99
2.4 GHz	0.900	165.49	4.21	46.94	0.019	-17.95	0.390	-162.93
2.5 GHz	0.900	163.87	4.04	44.73	0.019	-18.85	0.396	-163.88
2.6 GHz	0.900	162.26	3.89	42.54	0.019	-19.69	0.402	-164.86
2.7 GHz	0.900	160.66	3.75	40.37	0.019	-20.48	0.407	-165.85
2.8 GHz	0.900	159.08	3.62	38.21	0.019	-21.21	0.413	-166.86
2.9 GHz	0.900	157.51	3.50	36.05	0.018	-21.89	0.418	-167.89
3.0 GHz	0.900	155.93	3.39	33.91	0.018	-22.52	0.424	-168.95
3.2 GHz	0.900	152.79	3.18	29.65	0.018	-23.61	0.435	-171.12
3.4 GHz	0.900	149.64	3.00	25.40	0.017	-24.48	0.445	-173.38
3.6 GHz	0.900	146.45	2.85	21.17	0.017	-25.11	0.454	-175.73
3.8 GHz	0.900	143.23	2.71	16.93	0.017	-25.51	0.463	-178.17
4.0 GHz	0.900	139.94	2.58	12.69	0.017	-25.67	0.471	179.30
4.2 GHz	0.900	136.58	2.47	8.43	0.016	-25.60	0.479	176.67
4.4 GHz	0.899	133.14	2.38	4.15	0.016	-25.32	0.486	173.94
4.6 GHz	0.899	129.61	2.29	-0.17	0.016	-24.85	0.492	171.12
4.8 GHz	0.899	125.97	2.21	-4.53	0.016	-24.24	0.498	168.18
5.0 GHz	0.898	122.23	2.13	-8.94	0.016	-23.54	0.503	165.13
5.2 GHz	0.898	118.36	2.07	-13.41	0.016	-22.80	0.507	161.96
5.4 GHz	0.898	114.36	2.01	-17.95	0.017	-22.11	0.511	158.66
5.6 GHz	0.897	110.22	1.95	-22.56	0.017	-21.54	0.514	155.22
5.8 GHz	0.897	105.94	1.90	-27.26	0.018	-21.16	0.517	151.63
6.0 GHz	0.897	101.51	1.86	-32.04	0.019	-21.04	0.519	147.87

To download the s-parameters in s2p format, go to the [CGH40010](#) Product page and click on the documentation tab.

Product Dimensions CGH40010F (Package Type — 440166)

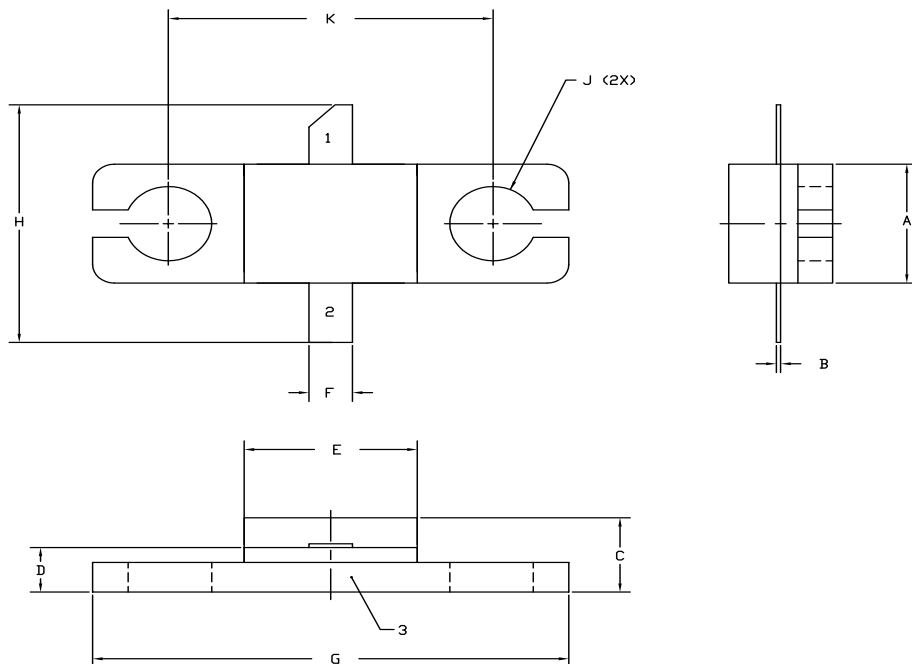


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF THE PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.
5. ALL PLATED SURFACES ARE NI/AU

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.155	0.165	3.94	4.19
B	0.004	0.006	0.10	0.15
C	0.115	0.135	2.92	3.43
D	0.057	0.067	1.45	1.70
E	0.195	0.205	4.95	5.21
F	0.045	0.055	1.14	1.40
G	0.545	0.555	13.84	14.09
H	0.280	0.360	7.11	9.14
J	Ø .100		2.54	
K	0.375		9.53	

PIN 1. GATE
PIN 2. DRAIN
PIN 3. SOURCE

Product Dimensions CGH40010P (Package Type — 440196)

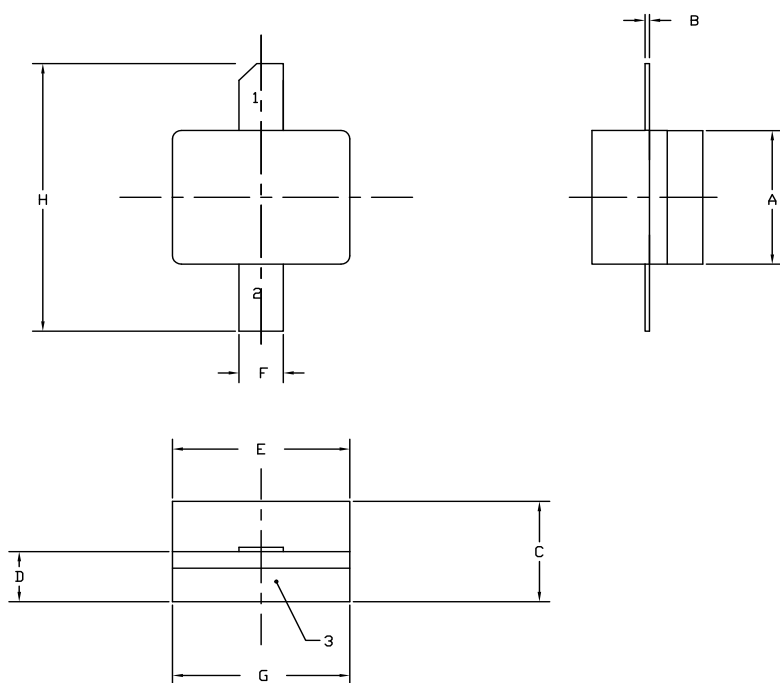

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF THE PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.
5. ALL PLATED SURFACES ARE NI/AU

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.155	0.165	3.94	4.19
B	0.003	0.006	0.10	0.15
C	0.115	0.135	2.92	3.17
D	0.057	0.067	1.45	1.70
E	0.195	0.205	4.95	5.21
F	0.045	0.055	1.14	1.40
G	0.195	0.205	4.95	5.21
H	0.280	0.360	7.11	9.14

PIN 1. GATE
PIN 2. DRAIN
PIN 3. SOURCE



Part Number System

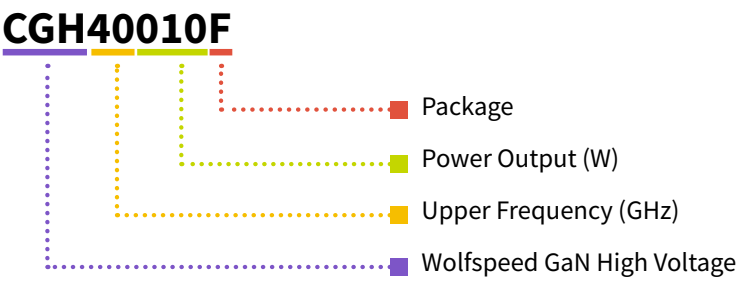


Table 1.

Parameter	Value	Units
Upper Frequency ¹	6.0	GHz
Power Output	10	W
Package	Flange or Pill	—




Note:

¹ Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Table 2.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples	1A = 10.0 GHz 2H = 27.0 GHz

Product Ordering Information

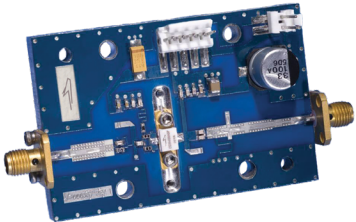Order Number	Description	Unit of Measure	Image
CGH40010F	GaN HEMT	Each	
CGH40010P	GaN HEMT	Each	
CGH40010F-AMP	Test board with GaN HEMT installed	Each	

**For more information, please contact:**

4600 Silicon Drive
Durham, NC 27703 USA
Tel: +1.919.313.5300
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com

Notes & Disclaimer

Specifications are subject to change without notice. “Typical” parameters are the average values expected by Wolfspeed in large quantities and are provided for information purposes only. Wolfspeed products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

©2006-2022 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc.
PATENT: <https://www.wolfspeed.com/legal/patents>

The information in this document is subject to change without notice.