

SPECIFICATIONS

Mechanical

Contact Retention Force: 1.82kg (4.00Lb) min.
Contact Engagement Force: 0.34kg (0.75Lb) max.
Contact Separation Force: 0.021kg (0.05Lb) min.
Durability: 500 Cycles

Electrical

Current Rating: 2A
Contact Resistance: 15mΩ max.
Dielectric Withstanding Voltage: 1000V AC/1min min.
Insulation Resistance: 5000MΩ min.


Physical

Housing: Thermoplastic, UL 94V-0 rated in Blue 661C Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -20℃ to +85℃
Recommended Thickness of PCB: 1.57[.062]



D-SUB Connector

DV Series




Right Angle, T/H Type
2.29mm [.090"] Pitch
15 Pos.

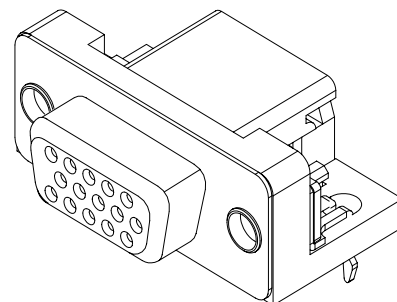

DRAWING

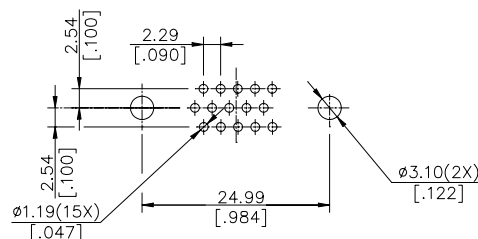

RECOMMENDED P.C.B. LAYOUT

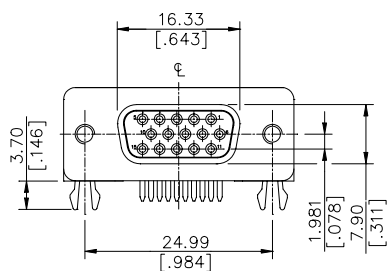

ORDERING INFORMATION

PRODUCT NO.: DV 1 1 2 0 * - ***

VGA Series _____
 Body Type _____
 1=Right Angle PCB Mount
 Termination Type _____
 1=Female
 NO. of Pos. _____
 2=H/D 15 Pos.
 Body Length _____
 0=8.89

Extension Code _____
 Contact Area Plating
 1=Gold Flash
 2=20u" Gold
 3=30u" Gold
 6=10u" Gold
 7=15u" Gold
 F=Gold Flash(Lead Free)

DV1120*-P34	WITH FEMALE SCREW LOCK
DV1120*-P33	WITHOUT FEMALE SCREW LOCK
P/N	CHARACTER