


m1  
 freq=2.14000GHz  
 S(1,1)=0.49636 / 45.10777  
 L2=0.00100  
 admittance = Y0 \* (0.38707 - j0.36121)

freq (2.140GHz to 2.140GHz)

“Auto” port calibration

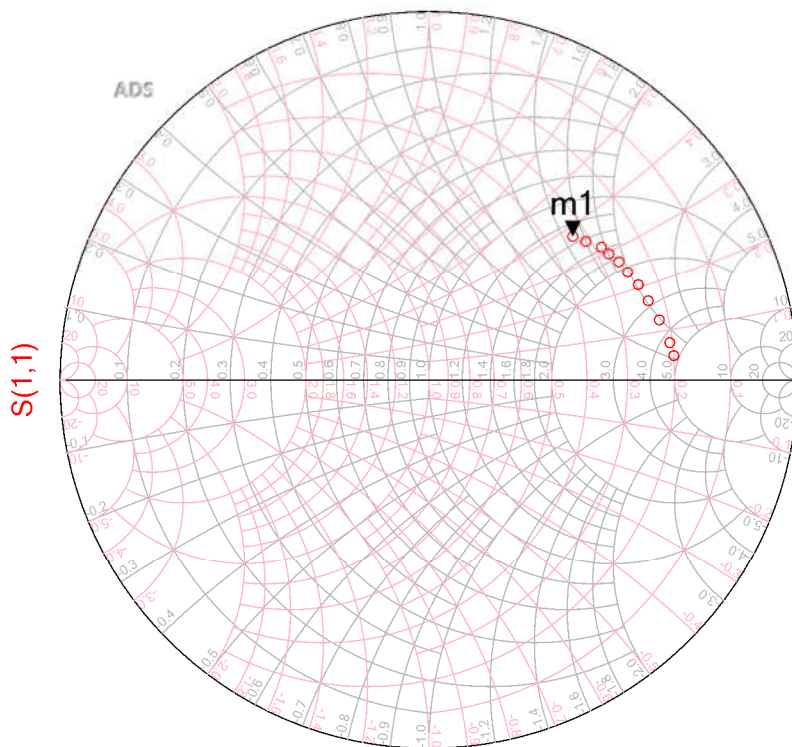

m1  
 freq=2.14000GHz  
 S(1,1)=0.55309 / 45.10322  
 L2=0.00100  
 admittance = Y0 \* (0.33263 - j0.37552)

freq (2.140GHz to 2.140GHz)

“TML” port calibration