

Coaxial

Low Pass Filter

50Ω DC to 5 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- good attenuation rate, 1.35 typ. 20dB/ 3dB BW ratio
- rugged shielded case
- other SLP models available with wide selection of cut-off frequencies

Applications

- lab use
- test equipment
- video equipment

**SLP-5+
SLP-5**


CASE STYLE: FF99

Connectors	Model	Price	Qty.
SMA	SLP-5(+)	\$34.95 ea.	(1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)	VSWR (:1)
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB) (loss > 40 dB)	Passband Typ. Stopband Typ.
DC-5	6	8-10 10-200	1.7 18


Outline Drawing

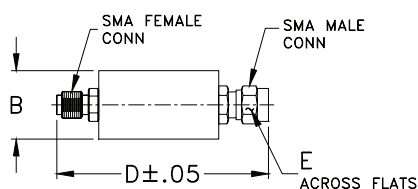


Outline Dimensions (inch/mm)

B	D	E	wt
.67	1.98	.312	grams
17.02	50.29	7.92	42.0

typical frequency response




electrical schematic




Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
\bar{x}	σ			
1.0	0.08	0.1	1.0	147.47
2.0	0.13	0.1	2.0	150.99
3.0	0.34	0.1	3.0	158.96
3.5	0.69	0.1	3.5	164.57
4.0	0.71	0.1	4.0	173.42
4.5	0.73	0.1	4.5	192.06
5.0	0.91	0.1	5.0	215.98
5.8	2.41	0.7	5.3	253.98
6.0	3.35	0.8	5.8	294.32
6.3	9.49	1.3	6.0	326.82
6.8	11.67	1.1	6.3	305.70
7.0	16.87	1.2	6.8	223.89
7.3	23.49	1.1	7.0	180.77
7.8	29.30	1.0	7.3	106.74
8.0	34.55	1.0	7.8	73.25
8.3	39.27	1.0	8.0	54.49
8.5	41.68	1.1	8.3	38.64
8.8	42.05	1.1	8.5	31.12
9.0	42.44	1.1	8.8	29.13
9.5	43.73	1.1	9.0	28.46
10.0	47.90	1.1	9.5	27.23
12.0	63.04	1.6	10.0	26.91
16.0	75.52	4.1	12.0	26.68
22.0	75.62	9.9	13.0	25.95
35.0	74.63	3.9	14.0	25.34
80.0	77.85	6.6	16.0	24.48
156.0	81.35	8.6	18.0	24.08
178.0	75.08	2.3	20.0	24.00
189.0	77.64	6.8	22.0	23.82
200.0	78.15	5.2	24.0	23.72


INSERTION LOSS

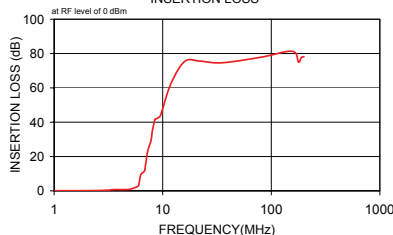

RETURN LOSS

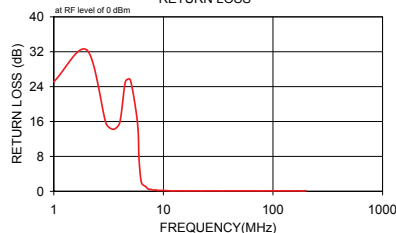

GROUP DELAY

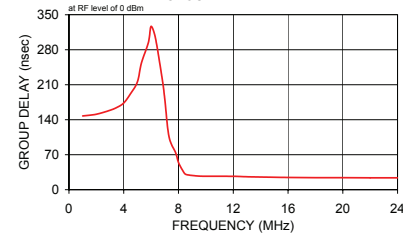
Mini-Circuits®

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shipping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M98898
SLP-5
090821