


INSULATED RS-485 PCB MODULE

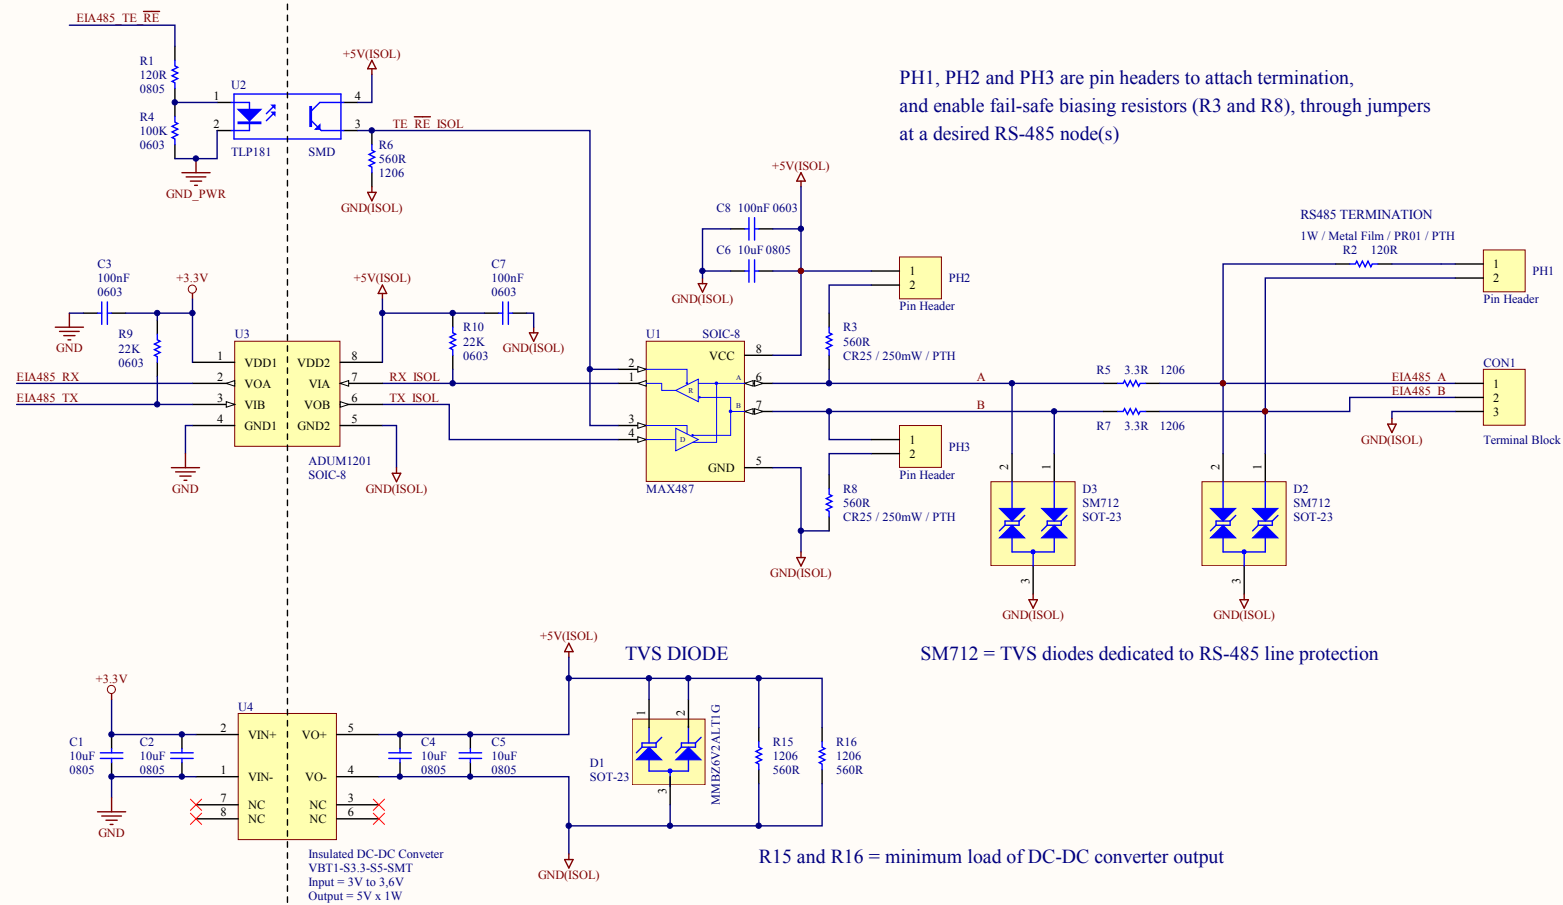

PH1, PH2 and PH3 are pin headers to attach termination, and enable fail-safe biasing resistors (R3 and R8), through jumpers at a desired RS-485 node(s)