


SCHEMATICS DIAGRAM OF THE SYSTEM



The photodiode is connected to the UART Rx terminal directly. Its not working actually. Can anyone suggest an intermediate circuit in between photodiode and Microcontroller Rx terminal for proper UART signal reception without errors and displaying it.

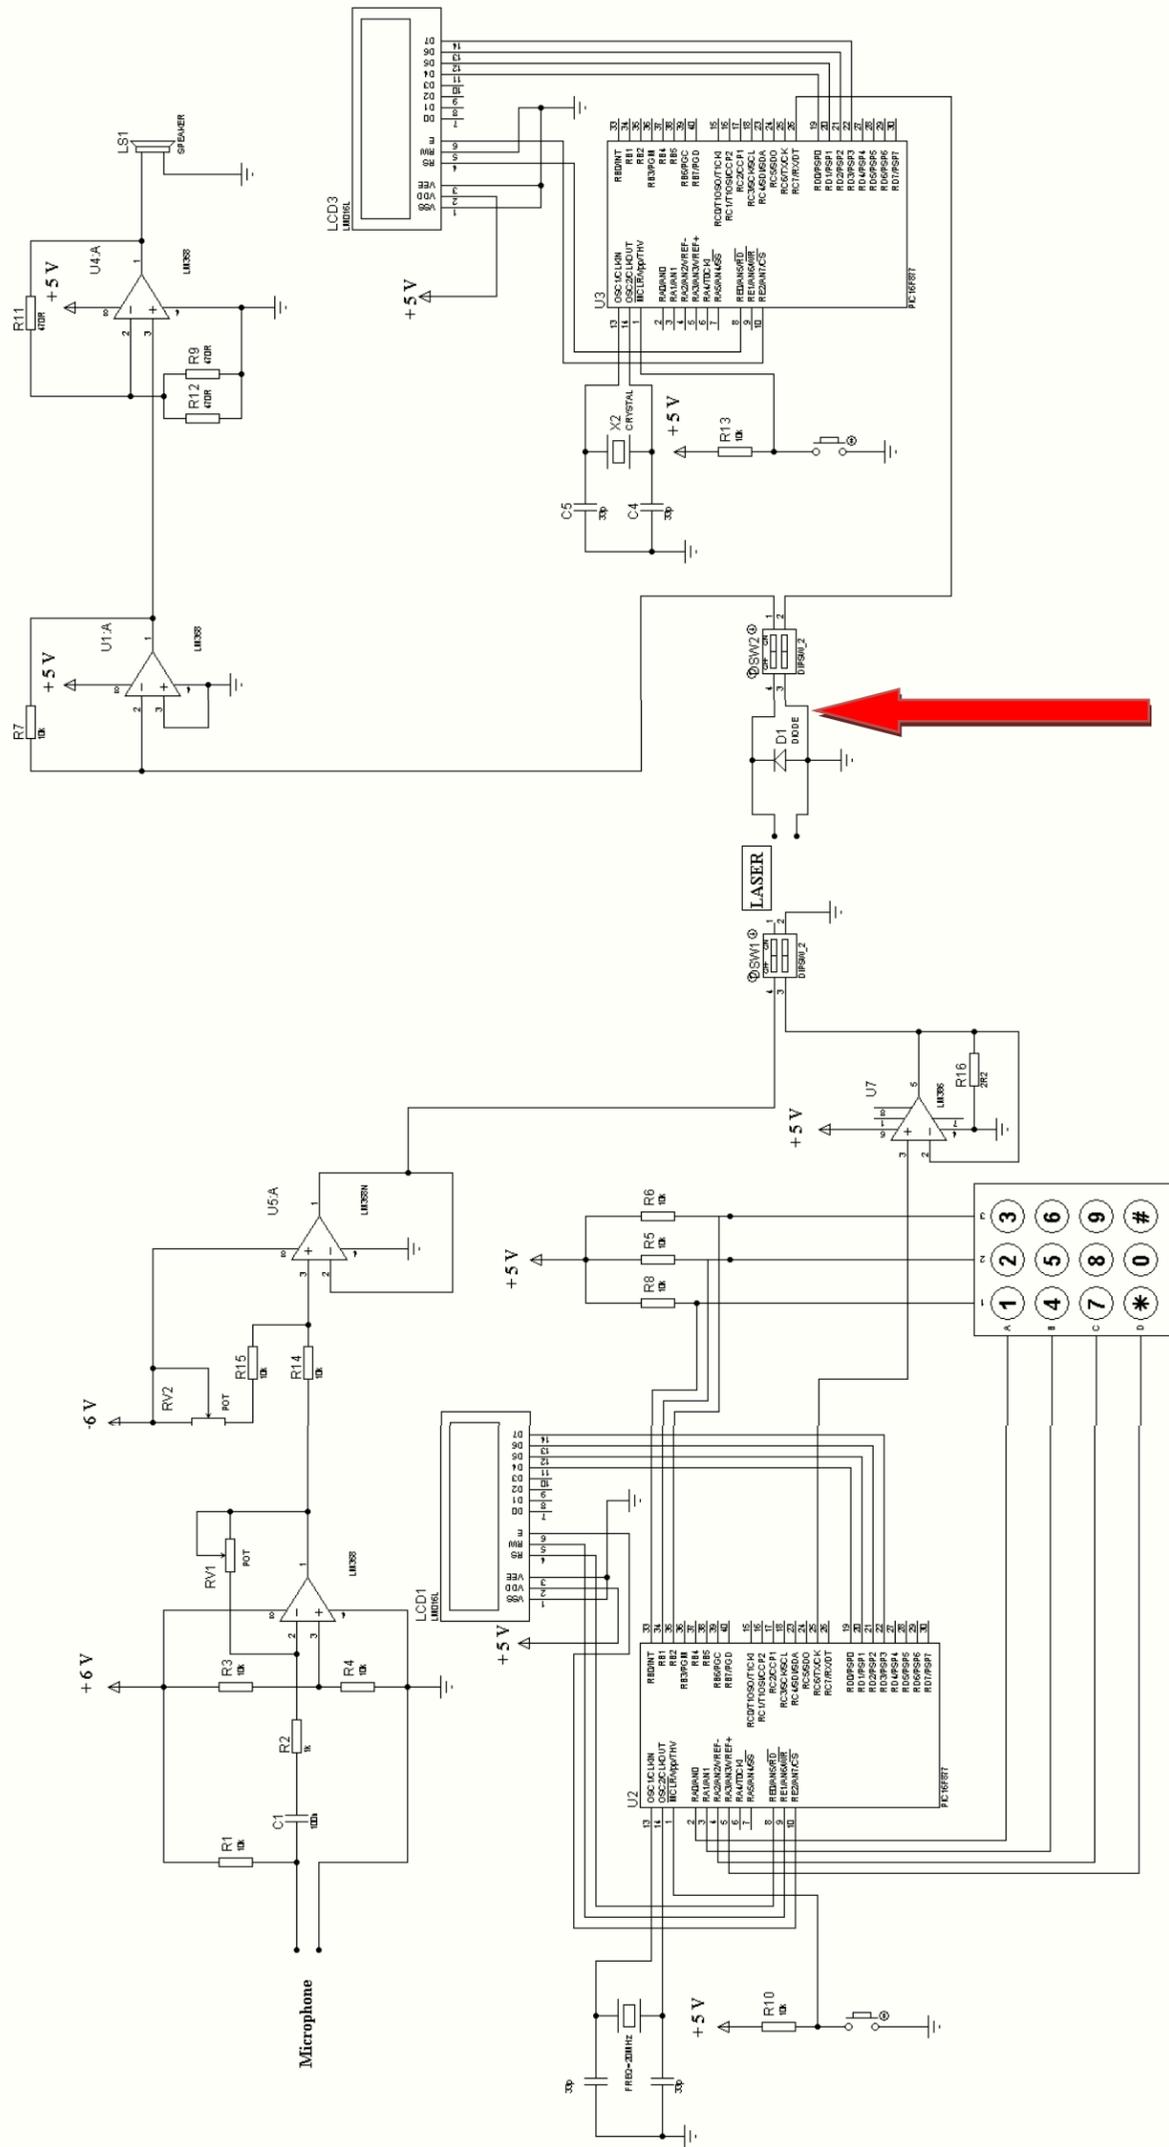