

VT-4A Series

DATASHEETS

UL Approval: E214381 Version: Rev. B2

Aluminum Base Laminate / Prepreg

General Information

- VT-44A / VT-44A PP: Thermal conductivity – 1.0W/mK, Ceramic Filled
- VT-4A1 / VT-4A1 PP: Thermal conductivity – 1.6W/mK, Ceramic Filled
- VT-4A2 / VT-4A2 PP: Thermal conductivity – 2.2W/mK, Ceramic Filled
- Excellent Electrical and Mechanical Characteristics
- Flammability (UL94 V0)

Application



- Power Conversion
- PDP, LED, Regulator for TV
- Monitor Drives
- Rectifier, Power supply

Storage Condition & Shelf Life

		Prepreg		Laminate
Storage Condition	Temperature	Below 23°C (73°F)	Below 5°C (41°F)	Room
	Relative Humidity	Below 55% RH	/	/
Shelf Life		3 Months	6 Months	24 Months (airproof)

Note: The pre-preg exceeding shelf life should be retested.

Designation

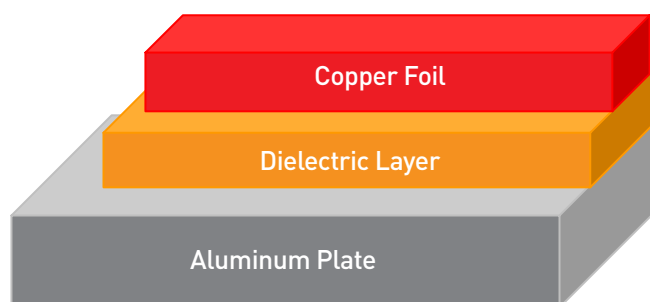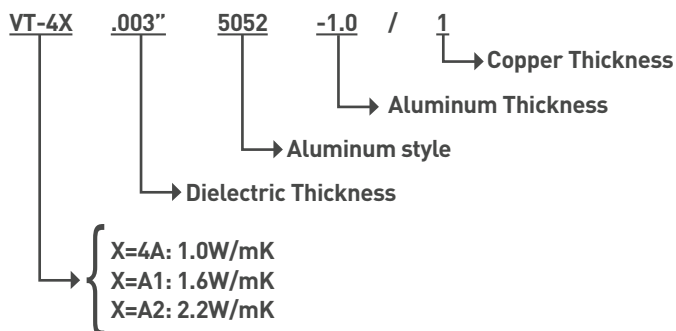

VT-4A Series

DATASHEETS

Properties Sheet

Laminate Properties		Test Condition (IPC TM650)	Unit	VT-44A				VT-4A1				VT-4A2			
				75um	100um	125um	150um	75um	100um	125um	150um	75um	100um	125um	150um
Thermal Conductivity		ISO22007-2	W/m*K	1.0				1.6				2.2			
Thermal Impedance		ISO22007-2	°C*in ² /W	0.118	0.158	0.197	0.237	0.074	0.099	0.123	0.148	0.054	0.072	0.089	0.107
Tg	DSC	2.4.25	°C	130				130				130			
Td	TGA	ASTM D3850	°C	380				380				380			
Thermal Stress	288°C, Solder Dip	2.4.13.1	minute	≥5				≥5				≥5			
Hi Pot Withstand	VDC	2.5.7	Volts	4500	5000	6000	6000	4500	5000	6000	6000	4000	4500	5500	6000
Dielectric Strength	VAC	2.5.6.2	V/mil	1500				1500				1500			
Dk (1MHz)	C-24 / 23 / 50	2.5.5.3	—	5.0				5.0				5.1			
Df (1MHz)	C-24 / 23 / 50	2.5.5.3	—	0.016				0.015				0.014			
Volume Resistance	After Moisture	2.5.17.1	MΩ-cm	6×10 ⁸				4.5×10 ⁸				5.1×10 ⁸			
	E-24/125			4×10 ⁷				2.3×10 ⁷				3.1×10 ⁷			
Surface Resistance	After Moisture	2.5.17.1	MΩ	3×10 ⁷				2.2×10 ⁷				2.3×10 ⁷			
	E-24/125			6×10 ⁶				5.1×10 ⁶				5.2×10 ⁶			
Peel strength (1oz Cu)	As Received	2.4.8	Lb / in	12.0				12.0				12.0			
Flammability	As Received	UL 94	—	V0				V0				V0			
CTI	As Received	ASTM D3638	Volts	600				600				600			
RTI	Electric	UL 94	°C	90				90				90			
	Mechanical	UL 94	°C	90				90				90			

Note: All test data provided are typical values and not intended to be specification values.

VT-4A Series

AVAILABILITY

Laminate

Standard Size*	Material	Material Thickness
18"*24"	Copper	Hoz 1oz 2oz 3oz 4oz 6oz 10oz
20"*24"		
21"*24"	Dielectric	.003"(75um), .004"(100um), .005"(125um), .006"(150um), .008"(200um)
18"*48"		
20"*48"	Aluminum	0.5mm 0.8mm 1.0mm 1.2mm 1.5mm 2.0mm 3.0mm
21"*48"		
22"*48"		
24"*48"		

Note: Other smaller sizes could be available; Other material thickness is available; Other Aluminum Alloy is available, refer to "Aluminum and Aluminum Alloy Information".

Prepreg

Material	Pressed Thickness (um)	Glass	Application
VT-44A PP	75	1080	Single Layer
	100	106	Circuit Clearance Filling & Hole Filling
		1080	Single Layer
	125	1080	-
VT-4A1 PP	75	1080	Single Layer
	100	106	Circuit Clearance Filling & Hole Filling
		1080	Single Layer
	125	1080	-
VT-4A2 PP	75	1080	Single Layer
	100	106	Circuit Clearance Filling & Hole Filling
		1080	Single Layer
	125	1080	-

Aluminum Protective Film Selection Guide

Type	Material	Operation Temperature
Standard Type	PET	170 °C
High Temperature Type	Polyimide	270 °C

VT-4A Series

ALUMINUM AND ALUMINUM ALLOY INFORMATION

Major Chemical Composition

Alloy Code	Major Chemical Composition	Alloy Code	Major Chemical Composition
1100	Al, Si, Fe, Cu, Zn, Mn	5052	Al, Mg, Fe, Si, Cr, Cu, Zn
3003	Al, Mn, Si, Fe, Cu, Zn	6061	Al, Mg, Si, Fe, Cr, Cu, Zn, Ti, Mn

Calorific & Electrical Performance

Alloy Code	Melting Point Range (°C)	CTE(ppm/°C)		Cp(J/g-°C)	Thermal Conductivity (W/m-K)	Resistivity (Ω-cm)
		20~100°C	20~300°C			
1100	643~657.2	23.6	25.5	0.904	220	3.00X10 ⁻⁶
3003	643~654	23.2	25.1	0.893	163	4.16X10 ⁻⁶
5052	607.2~649	23.8	25.7	0.880	138	4.99X10 ⁻⁶
6061	582~651.7	23.6	25.2	0.896	167	3.99X10 ⁻⁶

Mechanical Performance

Alloy	Hardness (HB)	Ultimate Tensile Strength (MPa)	Tensile Yield Strength (MPa)	Elongation at Break 1.6mm (%)	Modulus of Elasticity (GPa)	Poisson Ratio	Fatigue Strength (MPa)	Shear Modulus (GPa)	Shear Strength (MPa)
1100H24	32	124	117	9	68.9	0.330	48.3	26.0	75.8
3003H24	40	152	145	8	68.9	0.330	62.1	25.0	95.5
5052H32	68	262	214	10	70.3	0.330	124	25.9	145
6061T6	95	310	276	12	68.9	0.330	96.5	26.0	207

* Number of cycles: 5.0E+8.