

## UWT

Chip Type, Wide Temperature Range



For SMD




Smaller



Anti-Solvent Feature

- Chip type operating over wide temperature range of to  $-55$  to  $+105^{\circ}\text{C}$ .
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).

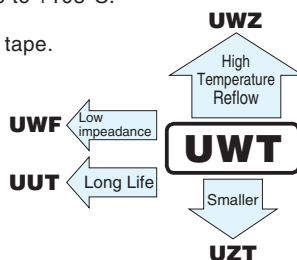


## Specifications

Item	Performance Characteristics								
Category Temperature Range	−55 to +105°C								
Rated Voltage Range	4 to 50V								
Rated Capacitance Range	1 to 1500μF								
Capacitance Tolerance	±20% at 120Hz, 20°C								
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA) , whichever is greater.								
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C								
	Rated voltage (V)	4	6.3	10	16	25	35	50	
	tan δ (MAX.)	0.40	0.30	0.24	0.20	0.16	0.14	0.14	
Stability at Low Temperature	Measurement frequency : 120Hz								
	Rated voltage (V)		4	6.3	10	16	25	35	50
	Impedance ratio	Z−25°C / Z+20°C	7	4	3	2	2	2	2
	ZT / Z20 (MAX.)	Z−40°C / Z+20°C	15	8	8	4	4	3	3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.				Capacitance change		Within ±25% of the initial capacitance value for capacitors of ϕ3mm unit, and 16V or less. Within ±20% of the initial capacitance value for capacitors of 25V or more.		
					tan δ		200% or less than the initial specified value		
					Leakage current		Less than or equal to the initial specified value		
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.								
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.				Capacitance change		Within ±10% of the initial capacitance value		
					tan δ		Less than or equal to the initial specified value		
					Leakage current		Less than or equal to the initial specified value		
Marking	Black print on the case top.								

## Chip Type


Type numbering system (Example : 16V 10 $\mu\text{F}$ )

( $\phi 3$  to  $\phi 8 \times 5.4$ )

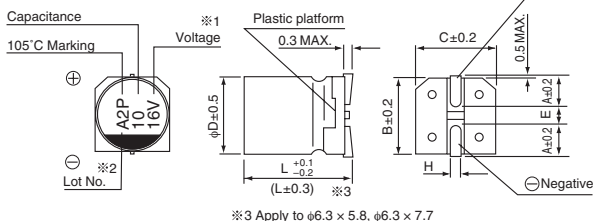


※3 Apply to  $\phi 6.3 \times 5.8$ ,  $\phi 6.3 \times 7.7$

( $\phi 8 \times 10$ ,  $\phi 10 \times 10$ )

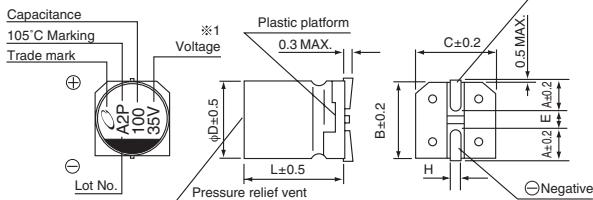

※1. Voltage mark for 6.3V is "6V". In case of marking for  $\phi 3$  units, "V" for rated voltage is omitted.

※2. In case of marking for  $\phi 3$  units. Lot No is expressed by a digit (month code).

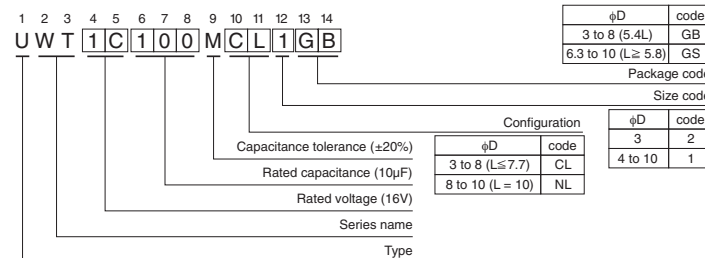

	(mm)								
$\phi D \times L$	3 × 5.4	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 5.8	6.3 × 7.7	8 × 5.4	8 × 10	10 × 10
A	1.5	1.8	2.1	2.4	2.4	2.4	3.3	2.9	3.2
B	3.3	4.3	5.3	6.6	6.6	6.6	8.3	8.3	10.3
C	3.3	4.3	5.3	6.6	6.6	6.6	8.3	8.3	10.3
E	0.8	1.0	1.3	2.2	2.2	2.2	2.3	3.1	4.5
L	5.4	5.4	5.4	5.4	5.8	7.7	5.4	10	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

● Dimension table in next page.

## ■ Dimensions

Cap. (μF)	V Code	4		6.3		10		16		25		35		50	
		0G		0J		1A		1C		1E		1V		1H	
1	010													4 × 5.4 (3)	6.3 (5.9)
2.2	2R2											3 × 5.4	7.5	4 × 5.4 (3)	11 (9)
3.3	3R3											3 × 5.4	9	4 × 5.4	14
4.7	4R7									4 × 5.4 (3)	13 (10)	4 × 5.4	15	5 × 5.4	19
10	100							4 × 5.4 (3)	18 (14)	5 × 5.4	23	5 × 5.4	25	6.3 × 5.4	30
22	220	4 × 5.4	22	4 × 5.4	22	5 × 5.4	27	5 × 5.4	30	6.3 × 5.4	38	6.3 × 5.4	42	● 8 × 5.4	51 (45)
33	330	5 × 5.4	30	5 × 5.4	30	5 × 5.4	35	6.3 × 5.4	40	6.3 × 5.4	48	● 8 × 5.4	59 (52)	6.3 × 7.7	60
47	470	5 × 5.4	36	5 × 5.4	36	6.3 × 5.4	46	6.3 × 5.4	50	● 8 × 5.4	66 (59)	6.3 × 5.8	63	6.3 × 7.7	63
100	101	6.3 × 5.4	60	6.3 × 5.4	60	6.3 × 5.4	60	6.3 × 5.4	60	6.3 × 7.7	91	6.3 × 7.7	84	8 × 10	140
150	151	6.3 × 5.8	86	6.3 × 5.8	86	6.3 × 5.8	86	6.3 × 7.7	95	8 × 10	140	8 × 10	155	10 × 10	180
220	221	● 8 × 5.4	102 (91)	● 8 × 5.4	102 (91)	6.3 × 7.7	105	6.3 × 7.7	105	8 × 10	155	8 × 10	190	10 × 10	220
330	331	6.3 × 7.7	105	6.3 × 7.7	105	8 × 10	195	8 × 10	195	8 × 10	190	10 × 10	300		
470	471	8 × 10	210	8 × 10	210	8 × 10	210	8 × 10	230	10 × 10	300				
680	681	8 × 10	210	8 × 10	210	10 × 10	310	10 × 10	310						
1000	102	8 × 10	230	8 × 10	230	10 × 10	310							Case size φ D × L (mm)	Rated ripple
1500	152	10 × 10	310	10 × 10	310										

Rated ripple current (mA<sub>rms</sub>) at 105°C 120Hz

( ) is also available with φ3mm upon request. In such a case, [2] will be put at 12th digit of type numbering system.

Size φ6.3 × 5.8 is available for capacitors marked. " ● " In such a case, [6] will be put at 12th digit of type numbering system.

## ● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUX(p.156), UUJ(p.162) series if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Nichicon:

[UWT1HR47MCL1GB](#) [UWT1HR47MCL2GB](#) [UWT1V100MCL1GB](#) [UWT1V101MCL1GS](#) [UWT1V220MCL1GB](#)  
[UWT1V221MNL1GS](#) [UWT1V2R2MCL2GB](#) [UWT1V330MCL1GB](#) [UWT1V331MNL1GS](#) [UWT1V3R3MCL2GB](#)  
[UWT1V470MCL1GS](#) [UWT1C101MCL1GB](#) [UWT1C220MCL1GB](#) [UWT1C221MCL1GS](#) [UWT1C330MCL1GB](#)  
[UWT1C331MNL1GS](#) [UWT1C470MCL1GB](#) [UWT1C471MNL1GS](#) [UWT1C681MNL1GS](#) [UWT1E100MCL1GB](#)  
[UWT1E220MCL1GB](#) [UWT1E330MCL1GB](#) [UWT1E331MNL1GS](#) [UWT1E470MCL1GB](#) [UWT1E470MCL6GS](#)  
[UWT1E471MNL1GS](#) [UWT1E4R7MCL1GB](#) [UWT1E4R7MCL2GB](#) [UWT1H010MCL1GB](#) [UWT1H010MCL2GB](#)  
[UWT1H0R1MCL1GB](#) [UWT1H0R1MCL2GB](#) [UWT1H100MCL1GB](#) [UWT1H101MNL1GS](#) [UWT1H220MCL1GB](#)  
[UWT1H221MNL1GS](#) [UWT1H2R2MCL1GB](#) [UWT1H2R2MCL2GB](#) [UWT1H330MCL1GS](#) [UWT1H3R3MCL1GB](#)  
[UWT1H470MCL1GS](#) [UWT1H4R7MCL1GB](#) [UWT1HR22MCL1GB](#) [UWT1HR22MCL2GB](#) [UWT1HR33MCL1GB](#)  
[UWT1HR33MCL2GB](#) [UWT0G101MCL1GB](#) [UWT0G220MCL1GB](#) [UWT0G221MCL1GB](#) [UWT0G330MCL1GB](#)  
[UWT0G470MCL1GB](#) [UWT0J101MCL1GB](#) [UWT0J102MNL1GS](#) [UWT0J152MNL1GS](#) [UWT0J220MCL1GB](#)  
[UWT0J221MCL1GB](#) [UWT0J330MCL1GB](#) [UWT0J331MCL1GS](#) [UWT0J470MCL1GB](#) [UWT0J471MNL1GS](#)  
[UWT0J681MNL1GS](#) [UWT1A101MCL1GB](#) [UWT1A220MCL1GB](#) [UWT1A330MCL1GB](#) [UWT1A470MCL1GB](#)  
[UWT1C100MCL1GB](#) [UWT1C100MCL2GB](#) [UWT1E221MNL1GS](#) [UWS1V470MCL1GS](#) [UWT0G151MCL1GS](#)  
[UWT0G221MCL6GS](#) [UWT0G331MCL1GS](#) [UWT0G471MNL1GS](#) [UWT0G681MNL1GS](#) [UWT0G102MNL1GS](#)  
[UWT0G152MNL1GS](#) [UWT0J151MCL1GS](#) [UWT0J221MCL6GS](#) [UWT1A151MCL1GS](#) [UWT1A221MCL1GS](#)  
[UWT1A331MNL1GS](#) [UWT1A471MNL1GS](#) [UWT1A681MNL1GS](#) [UWT1A102MNL1GS](#) [UWT1C151MCL1GS](#)  
[UWT1E101MCL1GS](#) [UWT1E151MNL1GS](#) [UWT1V330MCL6GS](#) [UWT1V151MNL1GS](#) [UWT1H6R8MCL1GB](#)  
[UWT1H220MCL6GS](#) [UWT1H151MNL1GS](#) [UWT1V101MCS1GS](#)